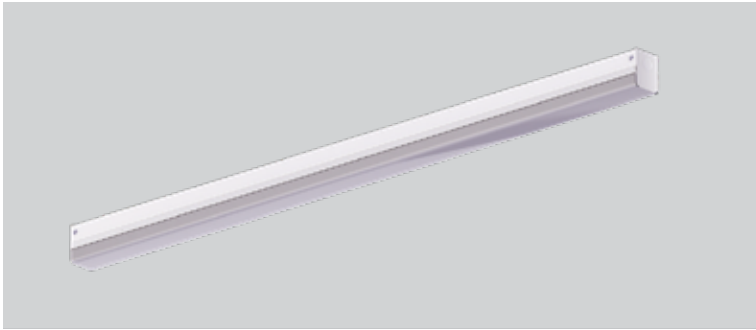



NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
10000	10049	72 W
8000	9549	57 W
6000	6212	44 W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

The Architectural LED Suspended Linear combines a slim profile with clean lines, making it an ideal choice for library stacks or narrow aisles. The flexibility of the luminaire allows for continuous, uniform and glare-free illumination. Available in single pendant or continuous mounting for a seamless connection from luminaire to luminaire, with adjustable mounting heights. This distinct luminaire is a perfect solution for educational, healthcare, office, commercial and retail spaces.


LUMENS	6000L/8000L/10000L
CCT	35K/40K/50K
CRI	85+(standard), 90+
COLOR QUALITY	3 Step MacAdam Ellipse
LENGTH	2', 4', 8'
MOUNTING	Suspended, Surface or Pendant
FINISH	WH (White), BK (Black), SI (Silver), Custom Colors
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, DIMST, ELDO10.1, ELDO10.1, DALI.1, DIMTR
EMERGENCY	10W - Up to 1000L output 20W - Up to 2000L output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory) EMG-LED-G2-20W-SDT - Self Diagnostic (Consult Factory) GTD10DIM-UL924
LIFETIME	L70 at 167,000 Hours
OPERATING TEMPERATURE	-20°C to 50°C ambient temperature
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21




Direct Standard



WHIPS

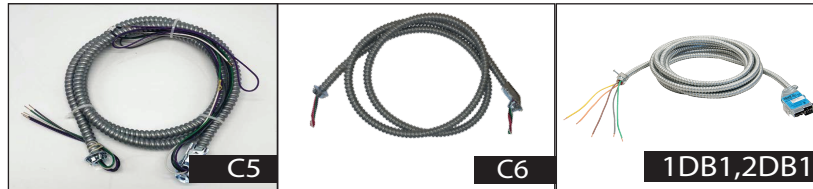

WHIPS		
☐ C5 C5-3/8X6FT FLEX ASSY 18/5 W/GRAY & PURPLE WIRE - EXTENDED TO 12"	☐ C6 6-wire Flex Cable (Single Circuit)	☐ 1DB1 120/208/240V Distribution cable, 3-wire w/ground-phase A,B, 1' cable length ☐ 2DB1 277/480V Distribution cable, 3-wire w/ground-phase A,B, 1' cable length

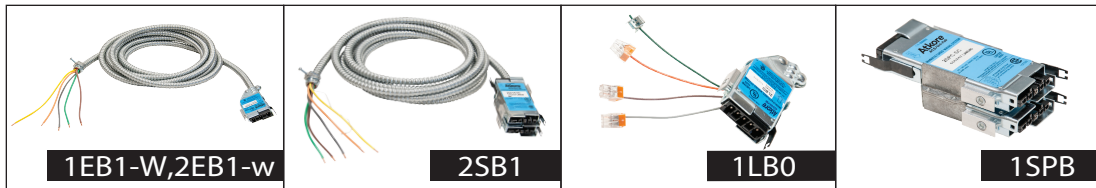

☐ 1EB1-W 120/208/240V Extender cable, 3-wire w/ground-phase A,B, 1' cable length-Whip End ☐ 2EB1-W 277/480V Extender cable, 3-wire w/ground-phase A,B, 1' cable length-Whip End	☐ 2SB1 277/480V Switch Module, 3-wire w/ground-phase A,B, 1' cable length	☐ 1LB0 120/208/240V Lighting Component, 3-wire w/ground-phase A,B, No cable required	☐ 1SPB 120/208/240V Splitter, 3-wire w/ground-phase A,B
---	--	---	--

8-OC4-LED-6000L-DIM10-MVOLT-40K-85

TEST NO.: **EL08242232**

INPUT WATTS: **43.8**


LUMENS: **6033**

EFFICACY: **138**

BEAM ANGLE: **135**

SPACING CRITERIA: **1.32**

CANDELA DISTRIBUTION



CANDELA TABLE

	0°	90°
0°	1568	1568
10°	1555	1540
20°	1504	1453
30°	1408	1313
40°	1274	1131
50°	1115	917
60°	933	677
70°	730	422
80°	520	169
90°	370	7

LUMINANCE (cd/sq.m)

	0.00°	90.00°
0.00°	8441	8441
45.00°	9113	7816
55.00°	9628	7501
65.00°	10617	7019
75.00°	12976	6071
85.00°	26410	3943

LUMENS PER ZONE

ZONE	LUMENS
0° - 10°	149
10° - 20°	430
20° - 30°	659
30° - 40°	809
40° - 50°	866
50° - 60°	827
60° - 70°	700
70° - 80°	505
80° - 90°	304

ZONAL LUMEN SUMMARY

ZONE	UMENS	% LUMINAIRE
0° - 20°	579	10%
0° - 30°	1238	21%
0° - 40°	2047	34%
0° - 60°	3740	62%
0° - 80°	4945	82%
0° - 90°	5249	87%

CONE OF LIGHT

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	43.6 fc	28.6 ft	17.2 ft
8.0 ft	24.5 fc	38.2 ft	22.9 ft
10.0 ft	15.7 fc	47.7 ft	28.6 ft
12.0 ft	10.9 fc	57.3 ft	34.3 ft
14.0 ft	8.0 fc	66.8 ft	40.0 ft
16.0 ft	6.1 fc	76.3 ft	45.8 ft
18.0 ft	4.8 fc	85.9 ft	51.5 ft
20.0 ft	3.9 fc	95.4 ft	57.2 ft

INDOOR COEFFICIENTS OF UTILIZATION

pf	20%																10%				0%			
pc	80%																50%				30%			
pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	116	116	116	116	112	112	112	112	104	104	104	97	97	97	90	90	90	90	90	90	90	90	90	87
1	104	99	94	89	100	95	91	86	88	85	81	82	79	77	76	74	72	69	69	69	69	69	69	69
2	94	85	77	71	90	82	75	69	76	71	66	71	66	62	66	62	62	59	56	56	56	56	56	56
3	85	74	65	58	81	71	63	57	66	60	54	62	56	52	58	53	49	46	46	46	46	46	46	46
4	78	65	56	49	74	63	54	48	59	51	46	55	49	44	51	46	42	39	39	39	39	39	39	39
5	71	58	49	42	68	56	47	41	52	45	39	49	43	38	46	40	36	34	34	34	34	34	34	34
6	66	52	43	36	63	50	42	35	47	40	34	44	38	33	41	36	32	29	29	29	29	29	29	29
7	61	47	38	32	58	45	37	31	43	35	30	40	34	29	38	32	28	26	26	26	26	26	26	26
8	56	43	34	28	54	41	33	28	39	32	27	37	30	26	35	29	25	23	23	23	23	23	23	23
9	53	39	31	25	51	38	30	25	36	29	24	34	28	23	32	26	22	20	20	20	20	20	20	20
10	49	36	28	23	47	35	27	22	33	26	22	31	25	21	30	24	20	18	18	18	18	18	18	18

8-OC4-LED-8000L-DIM10-MVOLT-40K-85

TEST NO.: **EL052022113**

INPUT WATTS: **57.4**


LUMENS: **8238**

EFFICACY: **144**

BEAM ANGLE: **140**

SPACING CRITERIA: **1.36**

CANDELA DISTRIBUTION



CANDELA TABLE

	0°	90°
0°	1997	1997
10°	1993	1967
20°	1941	1870
30°	1837	1711
40°	1685	1498
50°	1497	1240
60°	1275	941
70°	1018	617
80°	749	268
90°	522	16

LUMINANCE (cd/sq.m)

	0.00°	90.00°
0.00°	10749	10749
45.00°	12149	10457
55.00°	13046	10275
65.00°	14639	9987
75.00°	18274	9169
85.00°	38083	7000

LUMENS PER ZONE

ZONE	LUMENS
0° - 10°	190
10° - 20°	551
20° - 30°	852
30° - 40°	1065
40° - 50°	1159
50° - 60°	1128
60° - 70°	978
70° - 80°	729
80° - 90°	445

ZONAL LUMEN SUMMARY

ZONE	UMENS	% LUMINAIRE
0° - 20°	741	9%
0° - 30°	1593	19%
0° - 40°	2658	32%
0° - 60°	4945	60%
0° - 80°	6652	81%
0° - 90°	7097	86%

CONE OF LIGHT

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°
6.0 ft	55.5 fc	32.7 ft	18.9 ft
8.0 ft	31.2 fc	43.6 ft	25.2 ft
10.0 ft	20.0 fc	54.5 ft	31.5 ft
12.0 ft	13.9 fc	65.4 ft	37.8 ft
14.0 ft	10.2 fc	76.3 ft	44.1 ft
16.0 ft	7.8 fc	87.2 ft	50.4 ft
18.0 ft	6.2 fc	98.1 ft	56.7 ft
20.0 ft	5.0 fc	109.0 ft	63.0 ft

INDOOR COEFFICIENTS OF UTILIZATION

pf	20%																0%	
pc	80%								50%				30%				0%	
pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
0	116	116	116	116	111	111	111	111	103	103	103	96	96	96	89	89	89	86
1	104	98	93	88	99	94	90	86	87	84	80	81	78	75	75	73	71	68
2	93	84	77	70	89	81	74	68	75	69	65	70	65	61	65	61	58	55
3	84	73	64	57	81	70	62	56	65	59	53	61	55	50	56	52	48	45
4	77	64	55	48	74	62	53	47	58	50	45	54	48	43	50	45	41	38
5	71	57	48	41	67	55	46	40	51	44	38	48	42	36	45	39	35	32
6	65	51	42	35	62	49	41	34	46	39	33	43	37	32	40	35	30	28
7	60	46	37	31	57	45	36	30	42	34	29	39	33	28	37	31	27	24
8	56	42	33	27	53	41	32	27	38	31	26	36	29	25	34	28	24	22
9	52	38	30	24	50	37	29	24	35	28	23	33	27	22	31	25	21	19
10	49	35	27	22	47	34	27	22	32	25	21	30	24	20	29	23	19	17

INTEGRATED SENSOR AND CONTROL OPTIONS

With the Integration of controls, Elite Lighting now offers its products with controls-ready performance that increases energy efficiency, smarter space planning, and the enhancement of safety and productivity in the workplace. By utilizing these controls, Elite Lighting luminaires enable your customer's facility to run smarter, with the use of an easily controlled system through any platform.


Luminaire will be shipped with Powerpacks pre-installed, ready to be Integrated to designated control systems

Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be Integrated with designated control systems

Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be Integrated with designated control systems

BRAND	LEVITON	legrand®
MICROWAVE INTEGRATED SENSOR	☐ OSM3D-DDW High Frequency Microwave Occupancy Sensor with 0-10V Dimming	☐ FM-105 High Frequency Microwave Occupancy Sensor with 0-10V Dimming
	☐ OSM3D-V1W Line Voltage Microwave Sensor	☐ FS-205 Low Voltage Pir Fixture Integrated Occupancy Sensor ☐ FD-301 Low Voltage Daylight Dimming Photosensor
PIR INTEGRATED SENSOR	☐ OSFHU-LTW PIR Fixture Mount Occupancy Sensor	☐ FSP-311-B-D 0-10V continuous dimming PIR photo/motion sensor with bluetooth control option.
	☐ HB011-PDX PIR Fixture Mount Occupancy Sensor with Daylight Harvesting	

SIDE MOUNT



LEGRAND


☐ FSP-311-B-D
0-10V continuous dimming PIR photo/motion sensor with bluetooth control option.

LEVITON

☐ HB011-PDX
PIR Fixture Mount Occupancy Sensor with Daylight Harvesting

☐ OSFHU-LTW
PIR Fixture Mount Occupancy Sensor

IntegratedED



LEGRAND

☐ FM-105
High Frequency Microwave Occupancy Sensor with 0-10V Dimming

☐ FS-205
Low Voltage Pir Fixture Integrated Occupancy Sensor

☐ FD-301
Low Voltage Daylight Dimming Photosensor

LEVITON

☐ OSM3D-DDW
High Frequency Microwave Occupancy Sensor with 0-10V Dimming

☐ OSM3D-V1W
Line Voltage Microwave Sensor