




### SAFETY INSTRUCTIONS

1. Do not use outdoors. 2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel. 3. Do not mount near gas or electric heaters. 4. Cap unused wires with enclosed wire nuts or other approved method. 5. Do not use this equipment for anything other than its intended use. 6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition. 7. Use caution when servicing batteries. 8. Any service on this equipment should be performed by qualified personnel only. 9. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels. **CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING**



#### Caution:

Disconnect AC power before servicing and installation. All electrical connections must be in accordance with NEC/CEC or your local code.

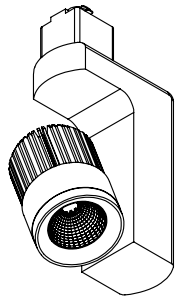


### SECOND CIRCUIT POSITIONING

For single hot track DO NOT CHANGE THE POSITION OF TAB.

#### 1.


Place the end of a flat head screw driver under the contact shown below or use a needle nose pliers and pullup the contact tab.

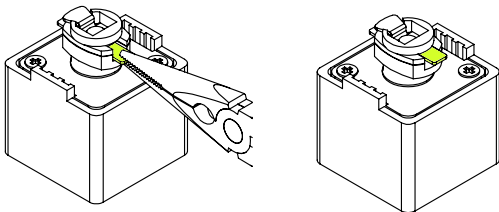

### TRACK HEAD INSTALLATION


#### 1.

Align parts as shown above and press down the outer box and insert the adapter head into the track.

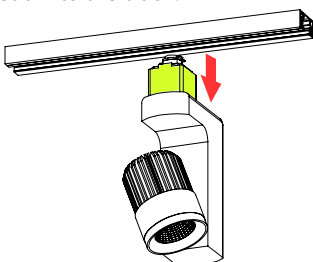


#### 2.

Rotate the adapter box with the side of both tabs towards the polarity line.

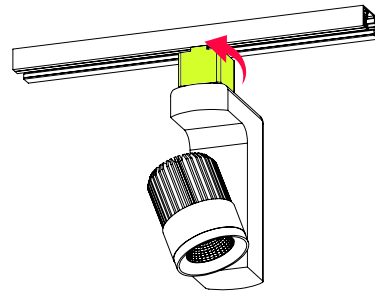


#### 3.

Release the outer box to its final position.

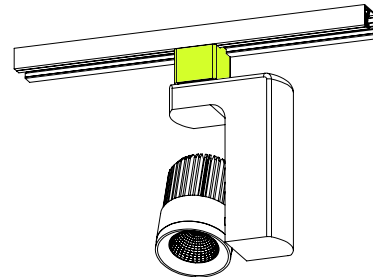


### OTHER MOUNTING OPTIONS

For junction box installation use the following canopies.

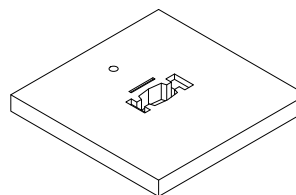

ET-104

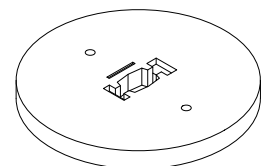

ET-140