



SAFETY INSTRUCTIONS

1. Do not use outdoors. 2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel. 3. Do not mount near gas or electric heaters. 4. Cap unused wires with enclosed wire nuts or other approved method. 5. Do not use this equipment for anything other than its intended use. 6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition. 7. Use caution when servicing batteries. 8. Any service on this equipment should be performed by qualified personnel only. 9. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels. **CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING**



Caution:

Disconnect AC power before servicing and installation. All electrical connections must be in accordance with NEC/CEC or your local code.




Caution:

Track system is polarized to accept power connectors only one way. This right hand connector will fit directly into the open end of the track system as shipped from the factory

INSTRUCTIONS STEPS


1.

Remove covers and attach 1/2" conduit connector (not supplied).

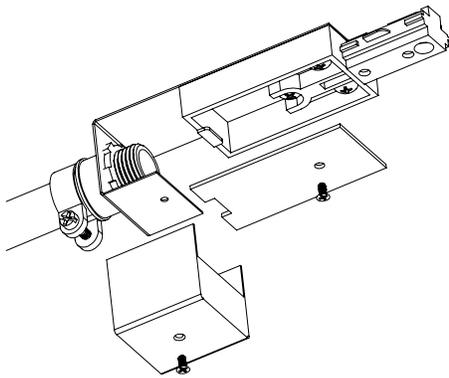

2.

Install connector into track rail. Arrows on connector must be on same side as polarity groove on the track sections. Secure track to ceiling surface.




3.

Fasten conduit to connector and secure conduit as seen in step 1

4.

Pull wires into live end connector and attach "HOT" wires to terminate marked "1" and "2". Attach neutral wire to "NEUT" terminal. Finally attach ground wire to green ground screw marked "GND" provided on back plate.

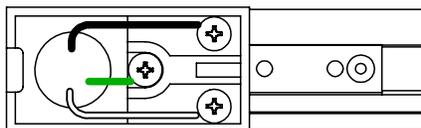

5.

Replace covers, energize and test system.

