

INSTALLATION INSTRUCTIONS

SAFETY PRECAUTIONS

For safety, read and understand instructions completely before starting installation. Electricity should be turned off at the fuse or the circuit breaker box before installing the fixture. All electrical connections must be in accordance with N. E. C. or your local code.

ASSEMBLY INSTRUCTIONS


1. Preparing for installation

Disconnect electrical power before installing or servicing any part of this fixture.


2. This product SHALL be surface mounted with junction box or non-combustible surface above 4 feet (1.2 meter) high. User should prepare necessary accessories and spare parts (not provided) including junction box and screws.

CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING


Type IC For Insulated Ceiling

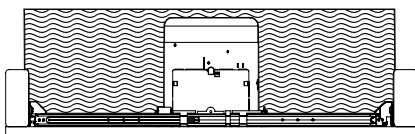


Elite Type IC fixtures are designed for direct contact with insulating materials which are approved for this application

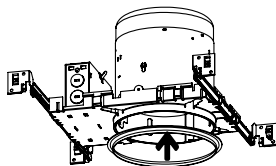

Step 1: Put the gasket tape around the ring

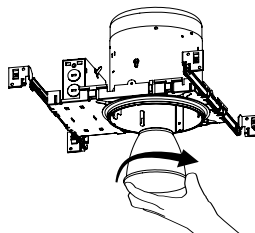


Step 2: Remove the reflector by rotating clockwise and then pulling down

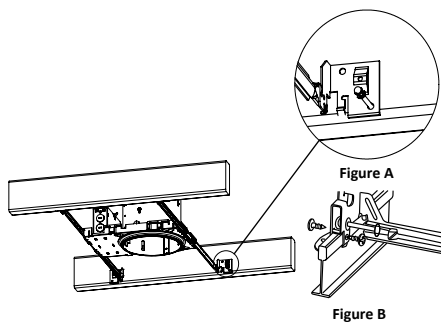


Step 3: Frame can be installed in either wood joist or suspended ceilings.

Wood Joist Installation: Extend the bar hangers to fit between the joist. Line fixture up with bottom of wood joist. Using a hammer, secure the housing to the wood joist with the built in step nail as shown in Figure A.


Suspended Ceiling Installation: Locate the four t-bar slots near the end of the bar hanger. Bend tabs out, slip the hanger bar over the t-bar and press the tabs back against the t-bar to hold it in place as shown in Figure B.

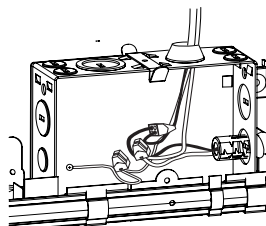

Step 4: Open the snap-on junction box captive door and remove the appropriate pry-out with screwdriver. Make all connections inside the junction box according to the voltage selected. For a specific wiring diagram please contact manufacture.

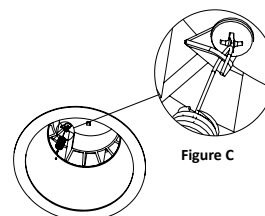

Step 5: After ceiling is finished and painted, install trim by connecting trim spring to fixture heatsink as shown in Figure C.

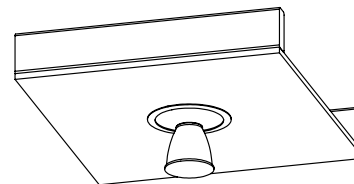

Step 6: Insert the optic reflector back and rotate it counter clockwise.

CAUTION: RISK OF ELECTRIC SHOCK
DISCONNECT POWER BEFORE CONNECTING THE FIXTURE.
FAIL TO DO SO MAY PERMANENTLY DAMAGE THE LEDS.

WARNING:
DO NOT REMOVE OR ATTEMPT TO REMOVE LEDS.