



SAFETY INSTRUCTIONS

1. Do not use outdoors. 2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel. 3. Do not mount near gas or electric heaters. 4. Cap unused wires with enclosed wire nuts or other approved method. 5. Do not use this equipment for anything other than its intended use. 6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition. 7. Use caution when servicing batteries. 8. Any service on this equipment should be performed by qualified personnel only. 9. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels.




Caution:

Disconnect AC power before servicing and installation. All electrical connections must be in accordance with NEC/CEC or your local code.




2.

Make wire connection with wire-nuts (by others). Push wire-nuts into junction box.




3.

Slide canopy up to ceiling and center around cord grip threads. Secure to ceiling with cable bushing.

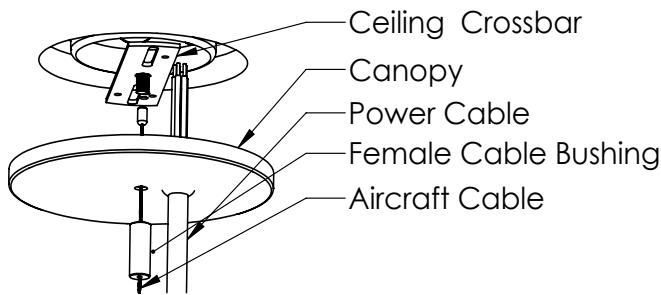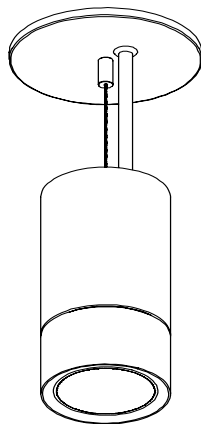

1.

Attach cross bar to junction box with screws.

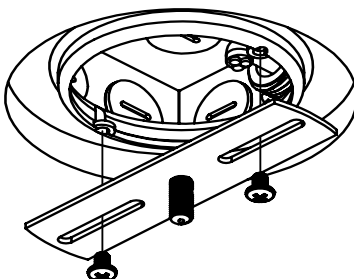



SAFETY INSTRUCTIONS


1. Do not use outdoors. 2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel. 3. Do not mount near gas or electric heaters. 4. Cap unused wires with enclosed wire nuts or other approved method. 5. Do not use this equipment for anything other than its intended use. 6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition. 7. Use caution when servicing batteries. 8. Any service on this equipment should be performed by qualified personnel only. 9. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels.



Caution:


Disconnect AC power before servicing and installation. All electrical connections must be in accordance with NEC/CEC or your local code.

DRIVER REPLACEMENT

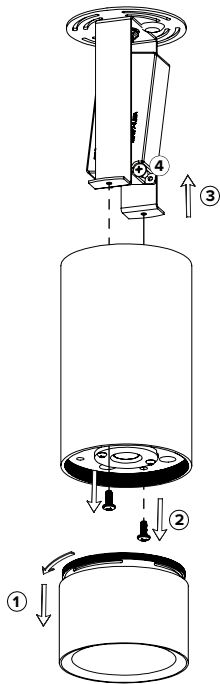

- 1.**
Unscrew pendant bottom
- 2.**
Remove the 2 screws
- 3.**
Remove bracket with driver from the pendant fixture
- 4.**
Remove 2 screws from LED driver
- 5.**
Install new driver
- 6.**
Assemble in reverse order

REFLECTOR & LED REPLACEMENT

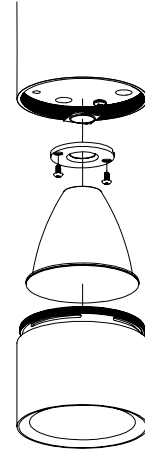

- 1.**
Unscrew pendant bottom
- 2.**
Replace reflector
- 3.**
Remove screws from LED holder
- 4.**
Remove LED holder
- 5.**
Replace LED holder
- 6.**
Assemble in reverse order