

INSTALLATION INSTRUCTIONS

SAFETY PRECAUTIONS

For safety, read and understand instructions completely before starting installation.
Electricity should be turned off at the fuse or the circuit breaker box before installing the fixture. All electrical connections must be in accordance with N. E. C. or your local code.

CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING

SURFACE MOUNTING





1. Locate the desired position for puck light.
2. Install the mounting can to mounting surface using two screws supplied.
3. Snap housing into the mounting can.
4. Connect the puck light to the 3-port adapter.
5. Connect the AC cord to an outlet.

Recessed Mounting

1. Drill a 2.5" hole in the desired location.
2. Feed wires through hole and the push housing into hole. The housing's spring clips will snap to the edge of the hole to hold puck in place.
3. Connect the puck light to the 3-port adapter.
4. Connect the AC cord to an outlet.

Technical Specifications for Driver

Output Voltage: 12VAC
Output Power: 75VAC
Input Voltage: 120VAC
Frequency: 50/60Hz

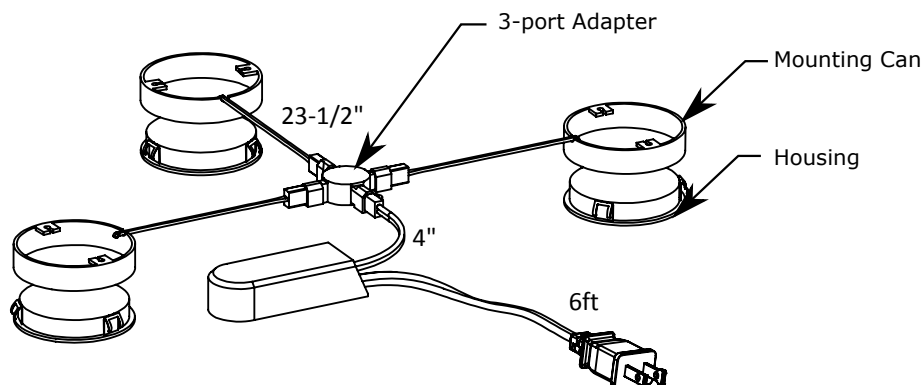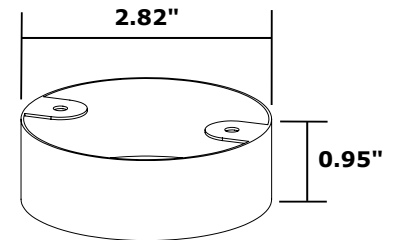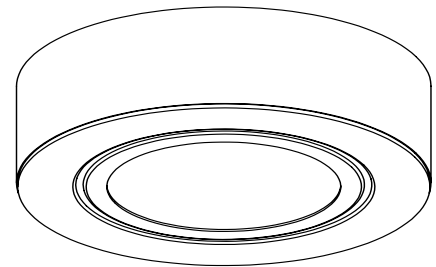

*1 puck - Driver sold separately / ***3-pack - Driver is included

CAUTION: RISK OF ELECTRIC SHOCK

DISCONNECT POWER BEFORE CONNECTING THE FIXTURE.
FAIL TO DO SO MAY PERMANENTLY DAMAGE THE LEDS.

WARNING:

DO NOT REMOVE OR ATTEMPT TO REMOVE LEDS.