
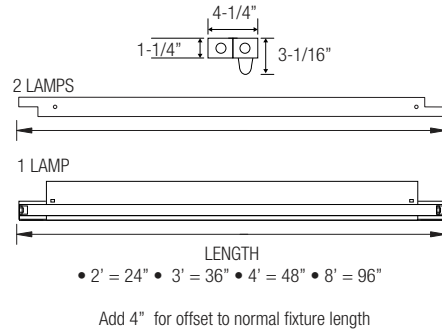


### T8 LOW PROFILE FLUORESCENT STAGGERED COVE LUMINAIRE (2 LAMP T8)

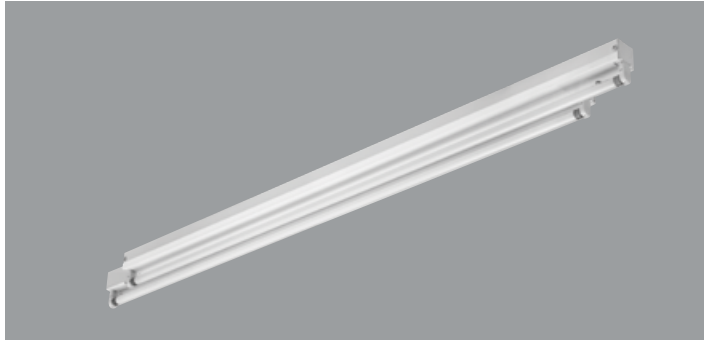

#### APPLICATION:

Staggered lamp fixtures are designed for use in cove, recessed slot, or luminous ceiling applications. Staggering the lamps provides for uniform illumination that eliminates shadows and/or hot spots: • Lobbies • Restaurants • Restrooms • Office buildings • Hallways • Airports • Retail spaces • Conference rooms

#### PRODUCT FEATURES:

- Combine various fixture lengths for row configurations
- Fixture channel is offset in order to provide smooth illumination without shadowing
- Die-formed, code-gauge, cold-rolled steel
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Shallow design is ideal for commercial spaces requiring cove illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Individual or continuous row mounting
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

#### LISTING

UL/C-UL listed to US and Canadian standard

#### WARRANTY

Guaranteed for one year against mechanical defects

T8  
OSTG

#### Ordering Information > Example: 3-OSTG-2-25-T8-MVOLT-EMG-T8-BX-700

<b>3</b>	<b>OSTG</b>	<b>2</b>							
<b>FIXTURE SIZE</b>	<b>SERIES</b>	<b>LAMPS</b>	<b>WATTAGE</b>	<b>VOLTAGE<sup>1</sup></b>	<b># OF BALLAST</b>	<b>BALLAST FACTOR</b>			
3'- 3'	OSTG-Oracle Staggered Strip	2	3' FIXTURE 25-T8 (25W/T8)	(Blank)- MVOLT (120/277) 120 277 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF			

BALLAST CONFIGURATION & CODE	
<b>25W/T8</b>	DESCRIPTION
-	Electronic Instant Start
(Blank)	Electronic Program Start
-	Advance Mark-7 <sup>1</sup>
-	Advance Mark-10 <sup>1</sup>
-	Advance Optanium <sup>1</sup>
-	Advance Essential <sup>1</sup>
-	Advance Rover <sup>1</sup>
-	Lutron Ecosystem H-Series <sup>1</sup>
-	Lutron Tu-Wire <sup>1</sup>
<b>LUT-EC5</b>	Lutron Ecosystem <sup>1</sup>
<b>LUT-EC3</b>	Lutron Eco-10 <sup>1</sup>
-	Lutron Tve <sup>1</sup>
<b>LUT-H3D</b>	Lutron Hi-Lume 3D <sup>1</sup>
-	Lutron Ecosystem (347V Only) <sup>1</sup>

<sup>1</sup>- Voltage must be specified for dimming ballast.

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
<b>EMG-T8-BX-450</b>	Up to 450 L. for <b>T8</b> or <b>BX</b>
<b>EMG-T8-BX-600</b>	Up to 600 L. for <b>T8</b> or <b>BX</b>
<b>EMG-T8-BX-700</b>	Up to 700 L. for <b>T8</b> or <b>BX</b>
<b>EMG-T8-BX-1400</b>	Up to 1400 L. for <b>T8</b> or <b>BX</b>
<b>EMG-SD-T8-BX-T5-T5HO-1400</b>	Self-Diagnostic 1400 L. for <b>T8</b> , <b>BX</b> , <b>T5</b> or <b>T5HO</b>
<b>EMG-ICE-T8-BX-T5-T5HO-1400</b>	ICE Pack 1400 L. for <b>T8</b> , <b>BX</b> , <b>T5</b> or <b>T5HO</b>
<b>GTD</b>	Generator Transfer Device

WIRING OPTIONS	
<b>C3</b>	- 6' 3-wire Flex Cable (Single Circuit)
<b>C4</b>	- 6' 4-wire Flex Cable (Double Circuit)
<b>FBF</b>	- Internal Fast Blow Fuse
<b>SBF</b>	- Internal Slow-Blow Fuse
<b>RIS</b>	- Radio Interference Suppressor

**OTHER OPTIONS**  
USA | - Made in America Compliance

**REFLECTOR OPTIONS**  
Refer to page 275

3' Low Profile Fluorescent Staggered