


### T8/T5 LINEAR FLUORESCENT DIRECT/INDIRECT PERFORATED (WALL MOUNT)

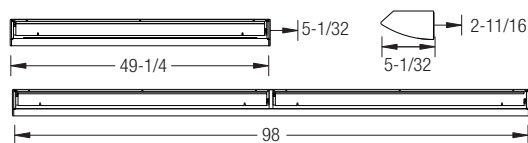

#### APPLICATION:

- Sconce application for hospitality, rest rooms, corridors and small offices • Wall mount indirect luminaire with forward throw optics

#### PRODUCT FEATURES:

- A computer-designed optical system maximizes the output of the (2) T5 or (2) T8-lamps producing minimal backlight and maximum forward throw
- Fixtures are designed with slots that provide limited downlight
- Reflector white forward throw steel
- Units are shipped with die-cast aluminum joiners installed for continuity
- Attach easily to other units for continuous mounting or ends caps
- The units mount to a wall bracket that compensates for uneven surface and allows for recessed electrical boxes, the brackets are 25-5/32"; or 48-3/4" and two of the 48-3/4" brackets are required for the 8' housing
- Ballast mounting assembly allows for easy installation separate from housing and then installs with two fasteners
- Architectural die-cast chamfered aluminum ends are available for a complete designer look without exposed fasteners

- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

#### FINISH:

White powder-coated 20-gauge roll-formed steel housing

#### LISTING

UL/C-UL listed to US and Canadian standard

#### WARRANTY

Guaranteed for one year against mechanical defects

T8/T5  
ASW1

#### Ordering Information > Example: 4-ASW1-1-32-T8-ADV-10-MVOLT-EMG-T8-BX-700

4	ASW1						
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE <sup>2</sup>	# OF BALLAST	BALLAST FACTOR		
4 - 4'	ASW1-Oracle Architectural Wall Series	4' FIXTURE 1-28-T5 (1 lamp/28W/T5) 1-54-T5HO (1 lamp/54W/T5HO) 2-28-T5 (2 lamps/28W/T5) 2-54-T5HO (2 lamps/54W/T5HO) 1-32-T8 (1 lamp/32W/T8) 2-32-T8 (2 lamps/32W/T8)	(Blank) - MVOLT (120/277) 120 277 347	(Blank) - 1 Ballast 2- 2 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF		

BALLAST CONFIGURATION & CODE			
32W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	-	-	Electronic Instant Start
EPS	(Blank) <sup>1</sup>	(Blank)	Electronic Program Start
ADV-7	-	ADV-7 <sup>1</sup>	Advance Mark-7 <sup>2</sup>
ADV-10 <sup>1</sup>	-	ADV-10 <sup>1</sup>	Advance Mark-10 <sup>2</sup>
-	ADV-OPT	-	Advance Optanium <sup>2</sup>
ADV-ESS <sup>1</sup>	-	-	Advance Essential <sup>2</sup>
ADV-ROVR	-	ADV-ROVR <sup>1</sup>	Advance Rover <sup>2</sup>
LUT-EHD <sup>1</sup>	LUT-EHD <sup>1</sup>	LUT-EHD <sup>1</sup>	Lutron Ecosystem H-Series <sup>2</sup>
LUT-2W <sup>1</sup>	-	-	Lutron Tu-Wire <sup>2</sup>
LUT-EC5 <sup>1</sup>	LUT-EC5 <sup>1</sup>	-	Lutron Ecosystem <sup>2</sup>
LUT-EC3 <sup>1</sup>	LUT-EC3 <sup>1</sup>	LUT-EC3 <sup>1</sup>	Lutron Eco-10 <sup>2</sup>
LUT-TVE <sup>1</sup>	-	-	Lutron Tve <sup>2</sup>
LUT-H3D <sup>1</sup>	LUT-H3D <sup>1</sup>	LUT-H3D <sup>1</sup>	Lutron Hi-Lume 3D <sup>2</sup>
-	-	LUT-ECO <sup>1</sup>	Lutron Ecosystem (347V Only) <sup>2</sup>

1- Requires 2 Ballasts for 4-lamps

2- Voltage must be specified for dimming ballast.

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

#### WIRING OPTIONS

FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

#### OTHER OPTIONS

USA	- Made in America Compliance
-----	------------------------------