

**INSTALLATION INSTRUCTIONS**

**WARNING:**

For safety, read and understand instructions completely before starting installation. Electricity should be turned off at the fuse or the circuit breaker box before installing the fixture. All electrical connections must be in accordance with N. E. C. or your local code.

Upon receipt, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the packing slip with the label on the carton to ensure you have received the correct merchandise.



1. Fabricate structure in ceiling that will allow the mounting frame to be installed horizontally and positioned the correct distance from the ceiling, see Figures 1 and 2.

2. Install mounting frame into structure. Refer to mounting frame instruction sheet.

3. Tie string with plumb bob through center of opening in mounting frame and mark on ceiling, see Figure 3. Using a compass, mark diameter on ceiling see Figure 2 for correct ceiling opening and cut opening.

4. Install Sloped Ceiling Adapter through opening and position under mounting frame. Form tabs through and on top of mounting frame opening, see Figure 4.

5. Install reflector. Refer to reflector instruction sheet.

**RISK OF FIRE**

Do not install insulation within 3 inches of fixture sides or wiring compartment, nor above the fixture in such a manner as to entrap heat.

FIG. 1

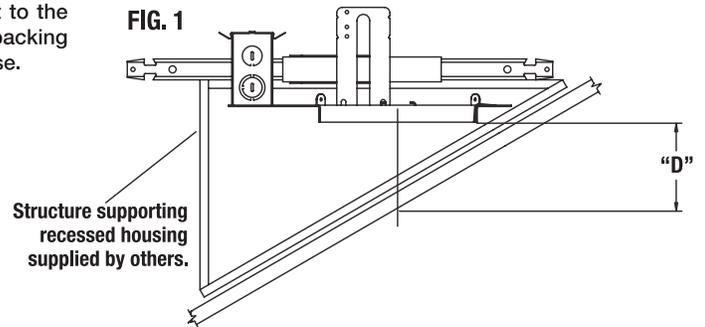


FIG. 2

Catalog Number	"D" - Distance from bottom of mounting frame to ceiling	Ceiling Opening
MSCA-6	3-7/8"	11" Dia.
MSCA-8	4-1/4"	12-5/8" Dia.

FIG. 3

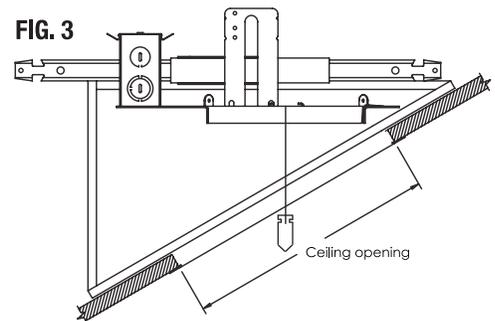


FIG. 4

