

DIMMABLE COMPACT LED DC 120V/277V MAGNETIC DRIVERS

Approximate Sizes and Weight (FOR USE WITH STANDARD OR MAGNETIC LOW VOLTAGE DIMMER)

| TYPE | Input(120V)(277V) | Output | Depth | Height | Width |
|-------------------|-------------------|--------|--------|--------|--------|
| EUM-DC-12-40-120 | 1@40 Watts | 12V DC | 2-1/4" | 5" | 2" |
| EUM-DC-12-60-120 | 1@60 Watts | 12V DC | 2-1/2" | 6" | 2-1/4" |
| EUM-DC-12-100-120 | 1@100 Watts | 12V DC | 2-1/2" | 6" | 2-1/4" |
| EUM-DC-12-150-120 | 1@150 Watts | 12V DC | 3" | 9.8" | 3" |
| EUM-DC-12-200-120 | 1@200 Watts | 12V DC | 3" | 9.8" | 3" |




DIMMABLE

ELV-50

DESCRIPTION:

This quiet 50W-12V electronic step-down transformer is designed to be used with low voltage lighting systems and is protected against overload, short circuit and over heat and has a 2 year guarantee.

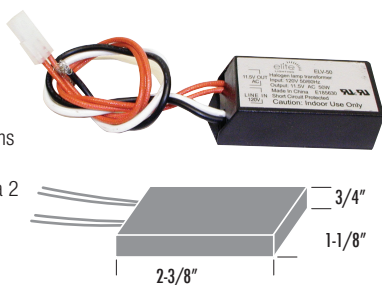


SPECIFICATIONS:

| | |
|--------------------------------|-------------|
| INPUT | 120V 60Hz |
| OUTPUT AT MAX. LOAD | 11.5V 40kHz |
| MAXIMUM LOAD | 50W |
| MINIMUM LOAD W/O DIMMER | 10W |
| MINIMUM LOAD WITH DIMMER | 20W |
| INPUT CURRENT AT MAXIMUM LOAD | 0.4A |
| OUTPUT CURRENT AT MAXIMUM LOAD | 4A |
| POWER FACTOR MIN. | 0.95 |
| DIMMABLE | ✓ |
| AVAILABLE COLOR: | |
| ● BLACK | |

ELV-75

DESCRIPTION:

This quiet 75W-12V electronic step-down transformer is designed to be used with low voltage lighting systems and is protected against overload, short circuit and over heat and has a 2 year guarantee.

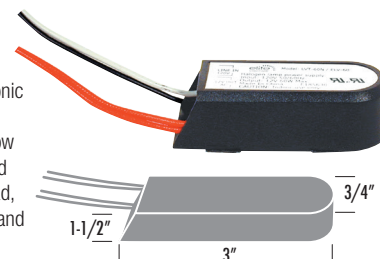


SPECIFICATIONS:

| | |
|--------------------------------|-------------|
| INPUT | 120V 60Hz |
| OUTPUT AT MAX. LOAD | 11.5V 40kHz |
| MAXIMUM LOAD | 75W |
| MINIMUM LOAD W/O DIMMER | 10W |
| MINIMUM LOAD WITH DIMMER | 20W |
| INPUT CURRENT AT MAXIMUM LOAD | 0.6A |
| OUTPUT CURRENT AT MAXIMUM LOAD | 6A |
| POWER FACTOR MIN. | 0.95 |
| DIMMABLE | ✓ |
| AVAILABLE COLOR: | |
| ● BLACK | |

ELV-60P

DESCRIPTION:

This quiet 60W-12V plug-in electronic step-down transformer is designed to be used with low voltage lighting systems and is protected against overload, short circuit and over heat and has a 2 year guarantee.

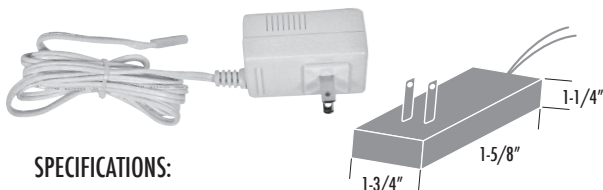


SPECIFICATIONS:

| | |
|--------------------------------|-------------|
| INPUT | 120V 60Hz |
| OUTPUT AT MAX. LOAD | 11.5V 40kHz |
| MAXIMUM LOAD | 60W |
| MINIMUM LOAD W/O DIMMER | 20W |
| MINIMUM LOAD WITH DIMMER | 20W |
| INPUT CURRENT AT MAXIMUM LOAD | 0.5A |
| OUTPUT CURRENT AT MAXIMUM LOAD | 5A |
| POWER FACTOR MIN. | 0.95 |
| DIMMABLE | ✓ |
| AVAILABLE COLORS: | |
| ● BLACK ○ WHITE | |

ELV-75P

DESCRIPTION:

This quiet 75W-12V plug-in electronic step-down transformer is designed to be used with low voltage lighting systems and is protected against overload, short circuit and over heat and has a 2 year guarantee.

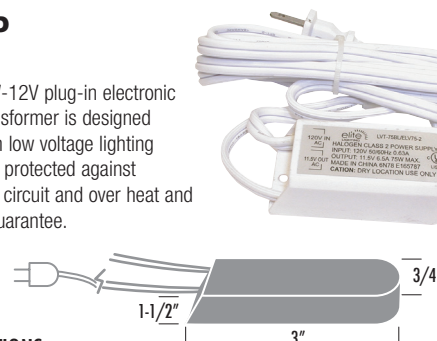

SPECIFICATIONS:

| | |
|--------------------------------|-------------|
| INPUT | 120V 60Hz |
| OUTPUT AT MAX. LOAD | 11.5V 40kHz |
| MAXIMUM LOAD | 75W |
| MINIMUM LOAD W/O DIMMER | 20W |
| MINIMUM LOAD WITH DIMMER | 20W |
| INPUT CURRENT AT MAXIMUM LOAD | 0.6A |
| OUTPUT CURRENT AT MAXIMUM LOAD | 6A |
| POWER FACTOR MIN. | 0.95 |
| DIMMABLE | ✓ |
| AVAILABLE COLORS: | |
| ● BLACK ○ WHITE | |