

8" Architectural CFL Lensed Wall Wash Downlight


Architectural

Catalog Number:**Project Name:**

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING

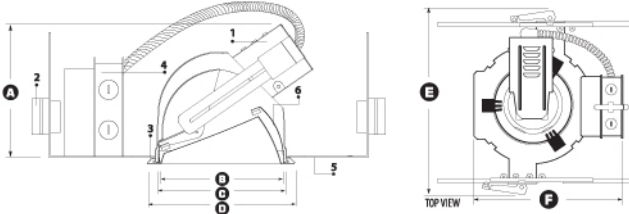

A. Height = 8-3/8"

B. Trim Aperture = 8"

C. Cut-out = 8-3/8"

D. Trim Outside Diameter = 9-1/8"

E. Width = 16"

F. Length = 12-1/2"

DESCRIPTION

1. LAMP HOLDER - Die-cast aluminum lamp holder effectively provides heat dissipation and ventilation. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjustability from either outside the housing or inside the housing.

2. MOUNTING BRACKET - Constructed from 16-gauge steel and is supplied with C-channels that are adjustable up to 26". Mounting brackets may be adjusted vertically from inside the housing.

3. RETAINING SPRINGS - Precision tooled springs secure trim to mounting frame, for effortless and tool-less installation.

4. JUNCTION BOX/BALLAST - UL listed for through-branch circuit wiring and has four ½" KO's, one ¾" KO and four Romex knockouts with pry-out slots and strain clamps. Ballast and Junction Box are accessible from below, no tools required. Ballast supplied is manufactured by Philips Advance, Universal Technologies or Lutron Electronics.

5. MOUNTING FRAME - Die-formed construction for maximum heat dissipation and rust protection.

OPTICS

6. REFLECTOR/WALLWASH - Angles lensed wall wash trim with tempered prismatic lens precisely positioned between an upper reflector to provide even light distribution down and across a wall.

LISTING


UL listed for through-branch circuit wiring and damp locations. Wet location only with lens trims.



LAMP BASE GUIDE (Sockets will accept all designated lamp bases listed.)

13W	18W	26W	32W	42W	57W	70W
G24q-1 GX24q-1	G24q-2 GX24q-2	G24q-3 GX24q-3 GX24q-4	GX24q-3 GX24q-4	GX24q-4	GX24q-5	GX24q-6

HW8PL - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE & DESCRIPTION	REFLECTOR	RING
<div><div>1 LAMP</div><div><input type="checkbox"/> 1X9</div><div><input type="checkbox"/> 1X13</div><div><input type="checkbox"/> 1X18</div><div><input type="checkbox"/> 1X26</div></div> <div><div>1 LAMPS</div><div><input type="checkbox"/> 2X9</div><div><input type="checkbox"/> 2X13</div><div><input type="checkbox"/> 2X18</div><div><input type="checkbox"/> 2X26</div></div>	<div><input type="checkbox"/> (E) Electronic</div> <div><input type="checkbox"/> (M) Magnetic ¹</div> <div><input type="checkbox"/> (S) Energy Star ²</div> <div><input type="checkbox"/> (DBL) Dual Ballast</div> <div><div>DIMMING</div><div><input type="checkbox"/> Mark 7 ³</div><div><input type="checkbox"/> Mark 10 ⁴</div><div><input type="checkbox"/> Lut-E (EC3D) ⁵</div></div> <div></div>	<div><input type="checkbox"/> MVOLT (120/277)</div> <div><input type="checkbox"/> 120</div> <div><input type="checkbox"/> 277</div> <div><input type="checkbox"/> 347</div>	<div><input type="checkbox"/> EMG 750 (750 Lumens) ⁶</div> <div><input type="checkbox"/> EMG 1300 (1300 Lumens) ⁶</div> <div><input type="checkbox"/> EMG-D-750 (750 Lumens) ⁸</div> <div><input type="checkbox"/> ICE-1300 (1300 Lumens) ¹⁰</div> <div><div>OTHER OPTIONS</div><div><input type="checkbox"/> FUSE ¹¹</div><div><input type="checkbox"/> RIF ¹²</div></div> <div></div>	<div><input type="checkbox"/> 8555 Lensed Wall Wash Reflector</div> <div></div>	<div><input type="checkbox"/> CL</div> <div><input type="checkbox"/> SHZ ^{**}</div> <div><input type="checkbox"/> WT</div> <div><input type="checkbox"/> W</div> <div><input type="checkbox"/> MB</div>	<div><input type="checkbox"/> WH</div>

1 - **(M) Magnetic** = Available on 9W, 13W, 18W & 26W fixtures only • **2 - (S) Energy Star** = Available on selected fixtures only, please see list above • **3 - MARK 7** = Must specify voltage • **4 - MARK 10** = Not available on 13W, 57W, 70W, must specify voltage • **5 - LUT - E (EC3D)** = Not available on 13W, 57W, 70W, must specify voltage • **6 - EMG** = Emergency battery pack w/ remote test switch • **7 - INTG** = Emergency battery pack w/ integral (reflector) test switch • **8 - EMG-D** = Emergency battery pack w/ remote test switch for damp location • **9 - INTG-D** = Emergency battery pack w/ integral(reflector) test switch for damp location • **10 - ICE** = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • **11 - FUSE** = Single slow-blow fuse • **12 - RIF** = Radio interference filter

Specifications:

HW8PL							
WATT	BALLAST	VOLTAGE	EMERGENCY	OPTIONS	TRIM TYPE	REFLECTOR	RING

Sample of Catalog Number: **HW8PL-1X26-E-MVOLT-EMG750-8555-CL-WH**

MAXI LUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ **www.maxilume.com**
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

MAX-SPECS 2011-03-08