

SR4-LED FLANGED

INSTALLATION INSTRUCTIONS

SAFETY PRECAUTIONS



For safety, read and understand instructions completely before starting installation.
Electricity should be turned off at the fuse or the circuit breaker box before installing the fixture. All electrical connections must be in accordance with N. E. C. or your local code.

CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING

Step 1: Mount the Universal Bar Hanger into the t-bar or stud as shown in Fig.1

Step 2: Remove the cover plate by unscrewing the screws on the side.
Insert power flex through the KO on the jbox. Plug-in the wires into their respectively splicing connectors as shown in Fig. 2 according to wiring diagram.

Step 3: Connect the connectors coming from the jbox and the trim.
Insert the trim through the hole by opening the clips on it as shown in Fig. 3.

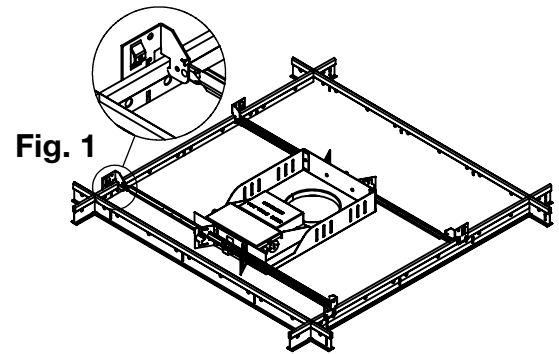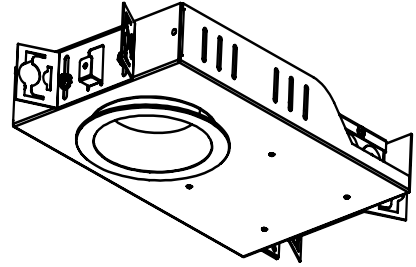

* This fixture can be mounted into t-bar or studs.

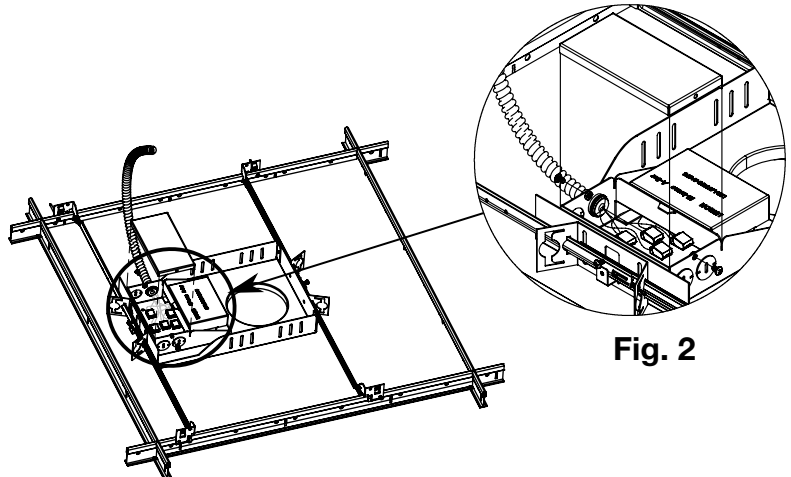


Fig. 2


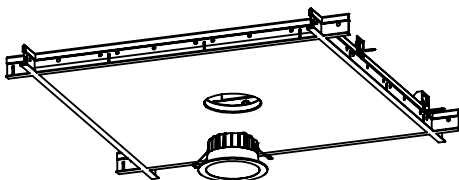


Fig. 3

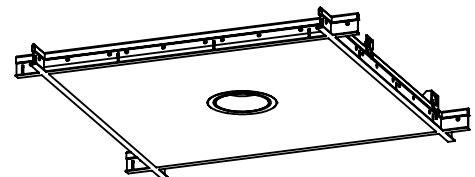

CAUTION: RISK OF ELECTRIC SHOCK
DISCONNECT POWER BEFORE CONNECTING THE FIXTURE.
FAIL TO DO SO MAY PERMANENTLY DAMAGE THE LEDS.

WARNING:
DO NOT REMOVE OR ATTEMPT TO REMOVE LEDS.