

LB8000-12-TWH Series
Outdoor Strip Light
Width / 0.47"
Height / 0.47"
IP68



FEATURES

Illuminate your space with versatility using the **LB8000-12-TWH tunable white Lumi-PRO top bend flexible neon**, lighting solution from Elite Lighting. This flexible neon, when coupled with Elite Lighting's decoders and controllers, offers control over ambiance and atmosphere.

With the **ELDO LED Linear drive option, performance is optimized, ensuring a tunable, dot-free lighting experience.** The LB8000-12-TWH boasts a wide tunable range from 6000K to 3000K, allowing for precise adjustment to suit any environment or mood. Whether you desire warm, inviting tones or cool, energizing hues, this dynamic lighting system delivers unmatched flexibility and quality. **Elevate your space with the LB8000-12-TWH.**

Max run up to 33ft
Outdoor/Wet Location (IP68)

Linear lighting

Top bend

Warranty: 5 years for indoor and 3 years for outdoor limited warranty

Color Temp. 4.4 W/ft.

6000K-3000K 280 lm/ft

MOUNTING TRACK

FNC-1212-5



Bending Aluminum Track
19" Length

FNC-1212-1




Bending Aluminum Track
39" Length

LB8000-12-CH



Flangeless Channel
39" Length

LB8000-12-CH-BR




Flangeless bracket
1.3" Length


TECHNICAL DETAILS

Power	4.4W/ft
Voltage	24V
IP	IP68
CRI	90+
LED Qty	74ft
Max Run(ft)	33ft
Cutting Length	Every 2"
Dimensions	W0.47" X H0.47"
Working Temp.	-4F / +122F

BENDING RADIUS / MIN. Bending radius 1.18" (30mm)




Concave Direction



Convex Direction

DIMENSIONS

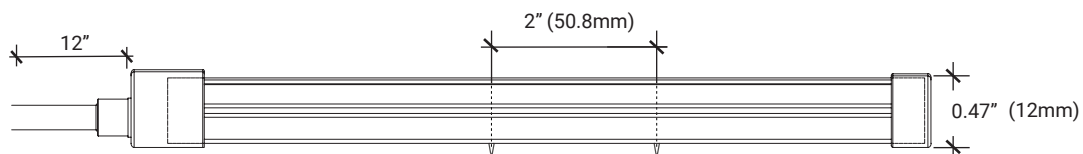

(Tape light comes with 12" standard length female barrel connector anti-wicking attached)



Accessories

LB8000-12-EC
(2 End caps Included)



Silicone end cap
non-power feed
0.5"x0.1"x0.5"

LB8000-12-EC-PF-EF
(2 End caps Included)



Silicone end cap
power feed
1"x0.5"x0.5"

LB8000-12-EC-PF-BF
(2 End caps Included)



Silicone end cap Side/
bottom power feed
1"x0.8"x0.5"

WL-BCF-3P-WHT
(1 Piece Included)



Female Barrel Connector
with Anti-Wicking ferrule
12" Length

WL-BCM-3P-WHT
(2 Pieces Included)



Male Barrel Connector
72" Length

ORDERING SELECTION

Example: LB8000-12-TWH-4.4W-33F-60K-30K-24V

LB8000-12-TWH					
---------------	--	--	--	--	--

SERIES	WATTAGE	LENGTH	CCT	VOLTAGE	ACCESSORIES
LB8000-12-TWH	4.4W - 4.4W/ft	33F - 33ft Roll CUS_ - Custom (Cutting length every 2")	60K-30K - 6000K-3000K	24V - 24V	

--	--

CONTROLLERS

- LB-2830B - RF Wall Controlle
- LB-2834-CCT - Wall Controller
- LB-2830BDMX - DMX Wall Controller
- LB-2819SCCT - RF Remote Controller
- LB-2833N-K5-CCT - RF Wall Dimmer
- LED25W-24 - Power Supply
- LB-2817DMX - RF Converter
- LB-1009EWI-5CH - RF+WiFi Receiver
- LB-2108-24-96CVF-UL - DMX Decoder Wired
- LB-2108B-M6-3 - DMX Decoder Wired
- LIN100M1 - Eldo LED Driver
- DD-24V-90W-N - Dim-tone Driver

DRIVER

Refer to the
next pages
for available
options.

- FNC-1212-5 - AL. Track 19" Length
- FNC-1212-1 - AL. Track 39" Length
- LB8000-12-CH - Flangeless channel
- LB8000-12-CH-BR - Flangeless bracket
- LB8000-12-EC - Silicone end cap/end
- LB8000-12-EC-PF-EF - Silicone end cap/power feed
- LB8000-12-EC-PF-BF - Silicone end cap side/bottom power feed
- WL-BCF-3P-WHT - Female Barrel Connector 12" Length
- WL-BCM-3P-WHT - Male Barrel Connector 72" Length

Tunable White / Wall Controller RF

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10

LED Receiver

LB-1009EWi-5CH

Input Voltage	12-36 VDC
Output Current	5x5A
Output Power	5x(60-180)W
Dimensions	6.6"X2.3"X1.1"



LB-1009EWi-5CH


WALL CONTROLLER

LB-2830B

Output Signal RF Signal
Power Supply 12-24VDC




LED25W-24 (Power Supply)
(Optional for wall controller)



Control 4 zones.

Wall Control

LED Tape Light

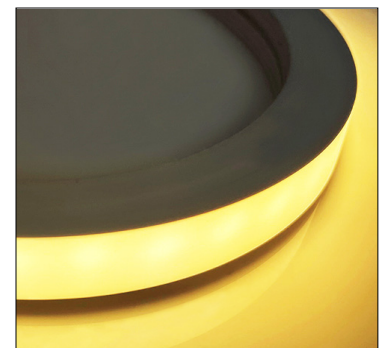

LB8000-12-TWH

Tunable White / Remote Controller RF

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10


LED Receiver

LB-1009EWi-5CH

Input Voltage	12-36 VDC
Output Current	5x5A
Output Power	5x(60-180)W
Dimensions	6.6"X2.3"X1.1"



LB-1009EWi-5CH



Remote Control

Remote CONTROLLER


LB-2819SCCT

Output Signal	RF Signal
Power Supply	3XAAA battery



Control 4 zones.

LED Tape Light

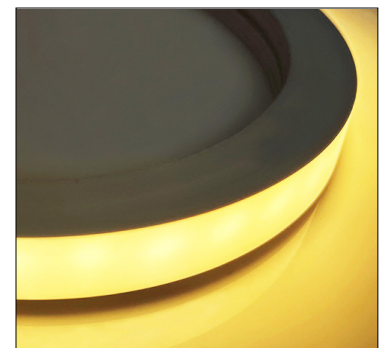

LB8000-12-TWH

Tunable White / Wall Dimmer Controller RF

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10

LED Receiver

LB-1009EWi-5CH

Input Voltage	12-36 VDC
Output Current	5x5A
Output Power	5x(60-180)W
Dimensions	6.6"X2.3"X1.1"



LB-1009EWi-5CH

WALL DIMMER CONTROLLER

LB-2833N-K5-CCT


Output Signal	RF Signal
Power Supply	3V (CR2032 battery)



Control 1 zone.

Wall Control

LED Tape Light

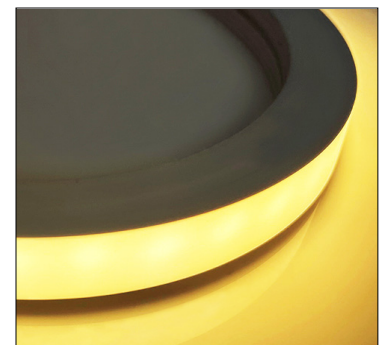

LB8000-12-TWH

Tunable White / DMX Wired

Power Supply



ED-96W-24V-TRIAC-DIM10



ED-192W-24V-TRIAC-DIM10



ED-288W-24V-TRIAC-DIM10



ED-384W-24V-TRIAC-DIM10

DMX Decoder

LB-2108B-M6-3

Input Voltage	12-24 VDC
Output Current	6x6A
Output Power	6x(72-144)W
Dimensions	7.3"X3.3"X1.6"



LB-2108B-M6-3



Wall Control


WALL CONTROLLER

LB-2830BDMX

Output Signal	DMX
Power Supply	12-24 VDC




LED25W-24 (Power Supply)
(Optional for wall controller)

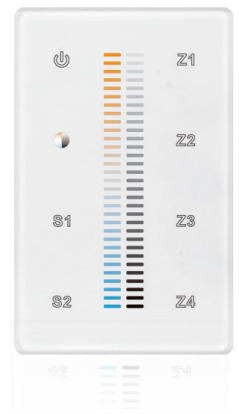

Control 4 zones.

LED Tape Light

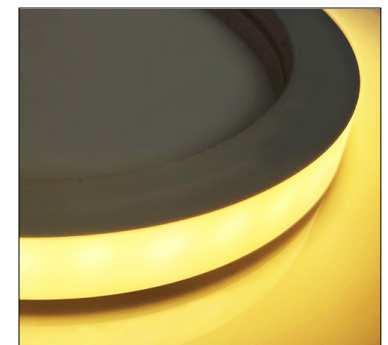

LB8000-12-TWH

Tunable White / AC to DC - DMX WIRED

Power Supply

LB-2108-24-96CVF-UL

Input Voltage	120-277 VAC
LED Channels	4
Frequency Range	50/60Hz
DC Voltage	24V DC
Dimensions	9.6"X2.5"X1.2"



LB-2108-24-96CVF-UL


WALL CONTROLLER

LB-2830BDMX

Output Signal	DMX
Power Supply	12-24 VDC




LED25W-24 (Power Supply)
(Optional for wall controller)

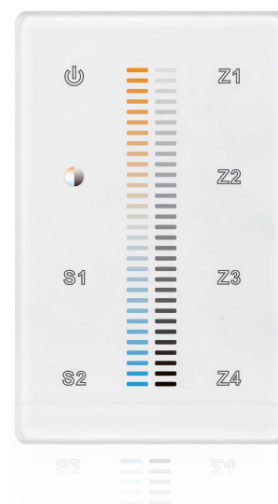

Control 4 zones.

Wall Control

LED Tape Light

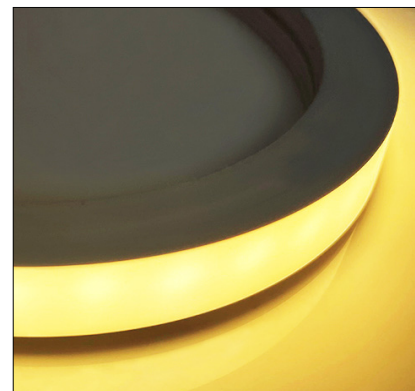

LB8000-12-TWH

Tunable White / ELDOLED AC to DC - DMX WIRED

Power Supply

LIN100M1

Control Protocol	DMX/DALI
Driver Type	Constant Voltage
Max. LED Output Power	100W
SIZE	14.57"X1.61"X1.18"



LIN100M1


WALL CONTROLLER

LB-2830BDMX

Output Signal	DMX
Power Supply	12-24 VDC




LED25W-24 (Power Supply)
(Optional for wall controller)

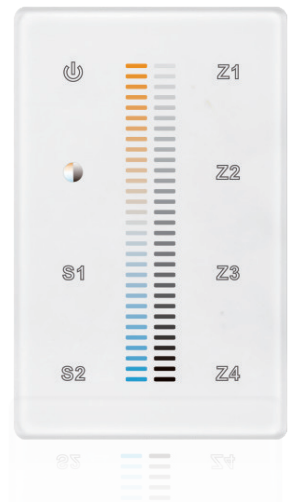

Control 4 zones.

Wall Control

LED Tape Light

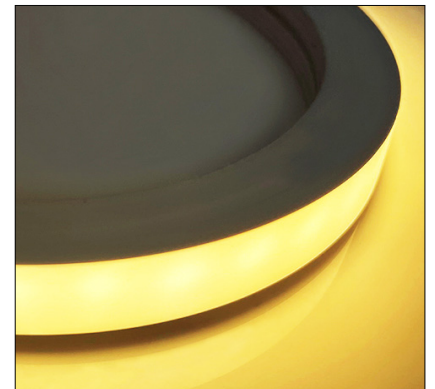

LB8000-12-TWH

Tunable White /Wall Control 0-10

Power Supply

DD-24V-90W-N

Rated Voltage	24VDC
Input Voltage	120VAC +/-10%
Max. Power	90W
Input Frequency	60Hz
Voltage Ripple & Noise Max	300mV (Vp-p)




WALL CONTROLLER

LB-2834-CCT

Output Signal	2X(1-10V)
Power Supply	100-277 VAC




Wall Control

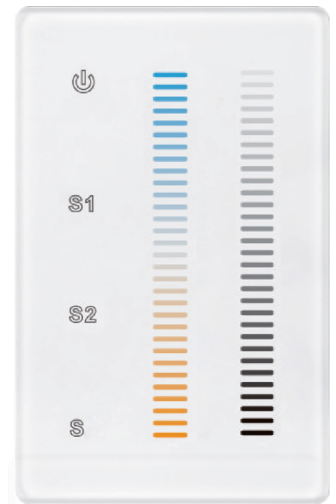

Control 1 zone.

LED Tape Light

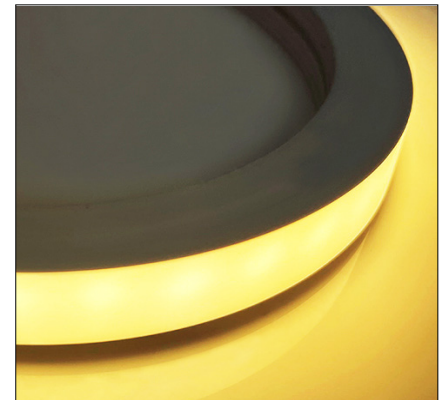

LB8000-12-TWH

Tunable White /Wall Control 0-10

Power Supply

DD-24V-90W-N


Rated Voltage	24VDC
Input Voltage	120VAC +/-10%
Max. Power	90W
Input Frequency	60Hz
Voltage Ripple & Noise Max	300mV (Vp-p)



WALL CONTROLLER


TECH-WS

Input	120VAC - 60Hz
Max. Load	700W
Load Type	12/24VDC Tunable White LEDs
Operating Temperature	-30 °C - + 40 °C / -86°F - + 104°F
Dimensions	8.4"X4.1"X1.5"




Wall Control

LED Tape Light

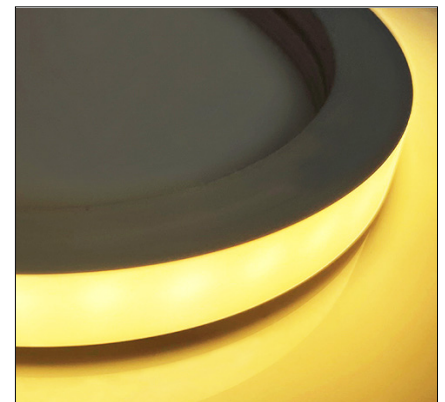

LB8000-12-TWH

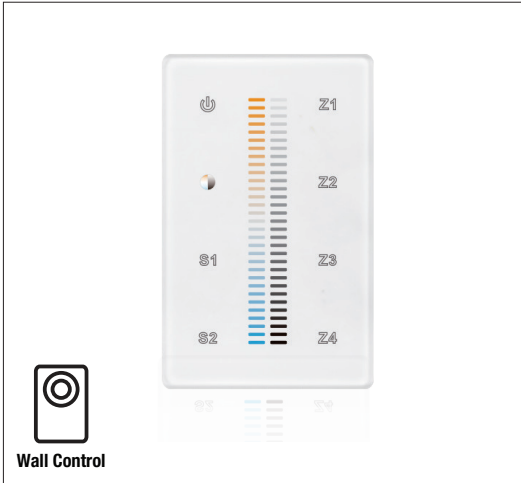

LB-2830B CCT Color Wall Panel Controller

- Ultra-sensitive, high-strength glass touch panel with a color line in the middle and backlighting.
- Ideal for dual-color LED lights, both warm white and cold white.
- Control 4 different zones separately or synchronously, with endless receivers available in each zone.
- Save 2 kelvin settings/scenes for each zone.
- Enable connection with both warm white and cold white to achieve accurate adjustment of color temperature and brightness
- 256-level brightness adjustment for each white to achieve millions of color temperature possibilities
- Smooth dimming without any flickering, ranging from 0.1% to 100%.
- Receivers can work with the WiFi-RF converter using the “Easylighting” app on IOS and Android systems.


Compatible with:

LB-1009EAWI - LED25W-24 - LB2817DMX - LB2108B-M6-3 - LB2108-24-96CVF-UL - LINEARDrive 100/M

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	12-24 VDC
Power Consumption	< 20 mA
Operating Temperature	0-40°C / 32°F-104°F
Frequency	916.5MHz
Dimensions	2.9”X4.7”X1”

Color	White
Certifications	FCC / RoHS
Zones	4
Rated	IP20
Warranty	5-Years limited warranty

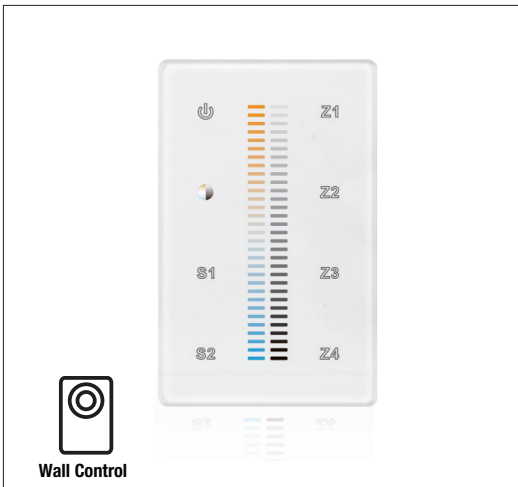

LB-2830BDMX DMX512 Wall Panel Controller


- DMX signal output, complies with standard protocol DMX512(1990).
- Four different zones can be operated separately or synchronized with endless decoders in each zone.
- Save 2 kelvins/scenes for each zone.
- 256-level brightness adjustment for each white allows for the achievement of millions of color temperatures.
- Smooth dimming and switching without any flickering.
- Backlighting design enables visibility in the dark.

Compatible with: LB-2108B-M6-3 - LB-2108-24-96VF-UL - LINEARDrive 100/M

TECHNICAL DETAILS

Output Signal	DMX512 Signal
Power Supply	12--24 VDC
Consumption Power	< 20 mA
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	4.7”X2.9”X1”
Mounting	Wall Mount

Color	White
Certifications	FCC / RoHS
Zones	4 zones
Surface	Glass
Control	CCT controller
Warranty	5 Years limited warranty

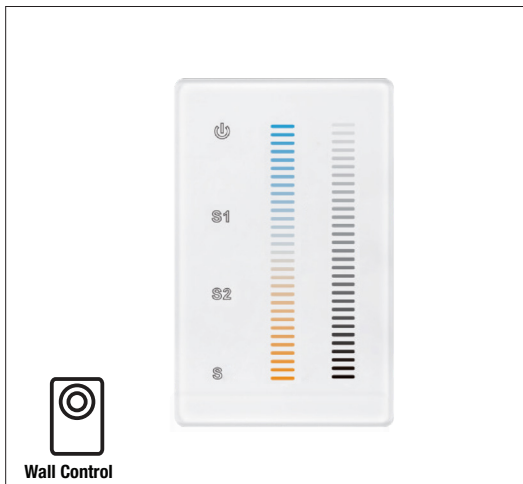

LB-2834-CCT 0/1-10V CCT Wall Panel Controller

- Double touch sliders, one for Brightness and the other one for CCT adjustment.
- Control 1 zone with endless receivers in each zone.
- Save up to 3 colors/scenes for each zone.
- 1% - 100% dimming.
- 2 channels 1-10V signal output.
- Receivers can work with the WiFi-RF converter using the “EasyLighting” or “Easyhome” app on IOS and Android systems.

Compatible with: DD-24V-90W-N LED Driver

TECHNICAL DETAILS

Output Signal	2X (1-10V) Signal
Power Supply	100-277VAC
Consumption Power	Max. 1.8W
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	4.7”X2.9”X1”
Mounting	Wall Mount

Color	White
Certifications	FCC / RoHS
Zones	1 zone
Surface	Glass
Control	CCT controller
Warranty	5 Years limited warranty



LB-2819SCCT CCT Color Remote Controller

- Ultra sensitive touch control color touch wheel.
- Control up to 4 zones; each zone can be set with endless receivers. 1 receiver can be paired by max 8 different remote controls.
- Save 3 kelvins/scenes for each zone.
- Control distance around 20-30 meters.
- Accurate and smooth color temperature and brightness adjustment for natural white, warm white, and cold white LEDs.
- 256-level brightness adjustment for each white to achieve millions of color temperatures.
- Smooth dimming without any flickering from 0.1% to 100%.
- Receivers can work with the WiFi-RF converter using the “EasyLighting” or “Easyhome” app on IOS and Android systems.

Compatible with: LB-2817DMX - LB-2108B-M6-3 - LB-1009EAWI

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	4.5V (3xAAA battery)
Operating Temperature	0-40°C / 32°F-104°F
Frequency	869.5/916.5/434MHz
Dimensions	4.7”X2”X0.66”

Certifications	FCC / RoHS
Color	Black
Zones	Control 4 Zones of RF receivers separately
Rated	IP20
Warranty	5-Years limited warranty



TECH-WS Single Switch

DimTech offers a single-switch, end-to-end approach, eliminating redundant components and compatibility issues for superior dimming performance. With its wireless support, DimTech offers flicker free smooth dimming down to 0.1% before shutting off. Just plug and play to start customizing your lighting in moments. Device pairing takes place automatically when the light is first switched on, with no technical knowledge needed.

- SmartAir-App/Voice Control.
- Flicker-Free soft dimming down to 0.1% Dim-to-off.
- Simple installation with no extra wiring or controllers.
- 120VAC wall switch no battery required.
- Fits US standard gang box.

Compatible with: DD-24V-90W-N LED Driver

TECHNICAL DETAILS

Input	120VAC - 60Hz
Max. Load	700W
Load Type	12/24VDC Tunable White LEDs
Operating Temperature	-30 °C - + 40 °C / -86°F - + 104°F
Dimensions	8.4"X4.1"X1.5"

Control Protocol	RF (auto pairing)
Dimming Range	0.1-100%
Dimming Method	PWM (2400Hz)
UL Listed	UL1472 / CSA C22.2184.1



LB-2833N-K5-CCT RF CCT Dimmer

RF wireless Dual Color Remote can control 1 zone of receiver. This CCT color controller is compatible with all universal series RF receivers. One receiver can be paired with a **maximum of 8 remote controllers.** This device contains a button lithium battery that should be stored and disposed of properly. **DO NOT expose the device to moisture.**

Output Signal	RF Signal
Power Supply	3V (CR2032 battery)
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	2.5"X1.2"X0.35"
Zones	Control 1 Zone of receiver
Frequency	916.5MHz
Rated	IP20
Warranty	5-Years limited warranty

Compatible with: LB-1009EAWI - LB-2817DMX - LB-2108B-M6-3



LED25W-24 (Power Supply) Optional for wall controller

Total Power: 25 Watts
 Input Voltage: 100-277 VAC
 UL Dry & Damp Location Rated
 IP66
 High Efficiency
 High Power Factor
 Analog Dimming (0-10V)
 Black Magic Thermal Advantage, Plastic Housing

Compatible with: LB-2830B - LB-2817DMX - LB-2830BDMX



LB-2817DMX DMX Converter

The **LB-2817DMX master** is a controller that receives RF or WiFi wireless signals from remote controllers, iOS, or Android mobile devices, and sends out **DMX512 signals** to **DMX decoders**, enabling remote or WiFi control of DMX controllers.

The master converts RF or WiFi signals to DMX signals, enabling wireless control. Easier and more convenient control can be achieved by pairing this RF and WiFi to DMX master with the **RF remote or WiFi controller LB2819S, iOS, and Android devices**.

- Control up to 8 zones.
- Set 8 scenes at each zone.
- Preset 10 changing modes, with pause function.
- Control synchronously after installing app on iPhone, iPad and android.
- Memory function to remember the last color/scene
- Enable dimming of the brightness for each R, G, B, W channel, allowing the mixing of millions of colors

TECHNICAL DETAILS

Output Signal	DMX512 Signal
Voltage	120 VAC
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	7"X1.8"X0.8"

Certifications	FCC / RoHS
Color	White
Warranty	5 Years limited warranty



LB-1009EWI-5CH RF+WiFi Receiver

The RF LED receiver **LB-1009EWI-5CH** is a **5-channel, fully functional constant voltage LED controller** available with **12-36VDC** and a **maximum output of 5A per channel**. It can drive RGB and dual-color (warm white and cold white) LED lighting with a single receiver when paired with an **RGB and CCT remote**.

In addition to RGB and CCT LEDs, the 5-channel RF receiver also supports **monochrome, dual-color, RGB, and RGB lighting when paired with the corresponding remote or wall-mounted control**.

It offers not only smooth brightness dimming function but also accurate color temperature and RGB color tone adjustment with PWM output. **Multiple zones can be controlled separately or synchronously with endless receivers in each zone**. Built-in changing patterns are available and can be saved to each zone. The brightness of each zone's R, G, B, W channels can be adjusted separately to achieve millions of colors.

When working with WiFi-RF converters, the RF receiver can be WiFi-controlled by an app installed on iOS or Android mobile devices.

TECHNICAL DETAILS

Input Voltage	12-36 VDC
Output Current	5x5A
Output Power	5x(60-180)W
Dimensions	6.6"X2.3"X1.1"

Frequency	869.5/916.5/434MHz
Certifications	FCC / RoHS
Color	White
Warranty	5-years limited warranty



LB-2108B-M6-3 DMX512 & RDM Decoder

The **LB-2108B-M6-3** is an Ultra-Pro 6CH RDM DMX512 decoder equipped with master and decoder modes and RDM functionality. Encased in a metal housing and featuring a digital display, **it can directly display data and easily set and show DMX addresses.**

This device offers multiple types of DMX input/output ports, including RJ45, XLR, and standard screws. It provides a total of 6 PWM output channels, all with common anode configuration. **The DMX channel quantity can be configured as either 1CH or 6CH, and the PWM output resolution ratio can be set to 8-bit or 16-bit.** With adjustable decoding modes, the output PWM frequency ranges from 500Hz to 35KHz, and the output dimming curve gamma value can be adjusted from 0.1 to 9.9.

TECHNICAL DETAILS

Input Voltage	12-24 VDC
Output Current	6x6A
Output Power	6x(72-144)W
Dimensions	7.3"X3.3"X1.6"

Output PWM Frequency	500HZ - 35K HZ settable
Certifications	FCC / RoHS
Color	Black
Warranty	5-years limited warranty



LB-2108-24-96CVF-UL DMX512 & RDM Dimmable LED Driver

The LB-2108-24-96CVF is a UL, ENEC, and TUV approved RDM-enabled DMX 96W dimmable LED driver with 4 channels of 24VDC constant voltage output and a 100-277VAC universal input. The driver boasts a power factor of over 0.9 and efficiency exceeding 90%, ensuring smooth and deep dimming down to 0.1% without flickering or buzzing noise.

It supports DMX channel quantities of 1/2/3/4, configurable via buttons, allowing control of single-color, tunable white, and RGB/RGBW LED lighting. DMX addresses can be manually assigned using the buttons and displayed on the digital display. Compliant with DMX512(2008), DMX512-A, and RDM V1.0 (E1.20 - 2006 ESTA Standard) protocols, this DMX driver is compatible with universal DMX consoles, and its UL, ENEC, and TUV certification ensures high safety performance for worldwide use.

Various features can be configured via the visible numeric digital display and buttons, including DMX address, DMX channel quantity, PWM output resolution (8-bit or 16-bit), PWM output frequency (adjustable from 500Hz to ultra-high 30kHz, ideal for professional film lighting), GAMMA ray dimming curve value (adjustable from 0.1-9.9, with optional logarithmic and linear dimming), and DMX decoding modes (optional, with default mode set to dp1.1).

TECHNICAL DETAILS

Input Voltage Range	100-277 VAC
LED Channels	4
Frequency Range	50/60Hz
Output DC Voltage	24V DC
Dimensions	9.6"X2.5"X1.2"

Output Rated Power	Max. 96W (no minimum load required)
Certifications	FCC / RoHS
Color	White
Warranty	5-Years limited warranty



LIN100M1 DMX DRIVER

LINEARdrive gives you infinite color control for low-voltage LED applications, ranging from single color for accent and cove lighting to RGBW for full-color entertainment product solutions.

This constant voltage LED driver is DMX/DALI compatible and allows you to create your color or dynamic show without an external controller. Symbiosis ensures that the LED driver works seamlessly together with LED modules, controls, and intelligent luminaire elements.

TECHNICAL DETAILS

Output Voltage	12-24 VDC
LED output current	2.8A absolute maximum rating per output
Nominal input voltage range AC	120-250V (ENEC), 120-277V (UL)
Nominal input voltage DC	120-275V

Control Protocol	DMX/DALI
Driver Type	Constant Voltage
Max. LED Output Power	100W
SIZE	14.57"X1.61"X1.18"



DD-24V-90W-N Tunable White/Dim-to-Warm Control

Controlled by our DimTone Wall Switch through a wireless signal, this system entails zero compatibility issues and unbeatable dimming performance. This LED Driver provides smooth, flicker-free dimming down to 0.1% before total darkness to ensure a quality user experience. It is available in both 12VDC and 24VDC output.

The DriveTone is a UL listed Class 2 Driver that includes an integrated junction box with a separate input and output wiring compartment each with three 7/8" knockouts for easy and safe installation.

TECHNICAL DETAILS

Rated Voltage	24VDC
Input Voltage	120VAC +/-10%
Max. Power	90W
Input Frequency	60Hz
Voltage Ripple & Noise Max	300mV (Vp-p)

Dimensions	8.4"X4.1"X1.5"
Operating Temp	-30°C - +40°C / -86°F - +104°F
IP Rating	23
Color	White
UL Listed Class 2	cUL Listed