



**SAFETY INSTRUCTIONS**

1. Do not use outdoors. 2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel. 3. Do not mount near gas or electric heaters. 4. Cap unused wires with enclosed wire nuts or other approved method. 5. Do not use this equipment for anything other than its intended use. 6. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition. 7. Use caution when servicing batteries. 8. Any service on this equipment should be performed by qualified personnel only. 9. Make sure wire terminations are secure and leads are properly tucked in appropriate wire channels.




**Caution:**

Disconnect AC power before servicing and installation. All electrical connections must be in accordance with NEC/CEC or your local code.




**2.**

Remove the cover plate by unscrewing the screws on the side. Insert power flex through the KO on the jbox. Plug-in the wires into their respectively splicing connectors according to wiring diagram.

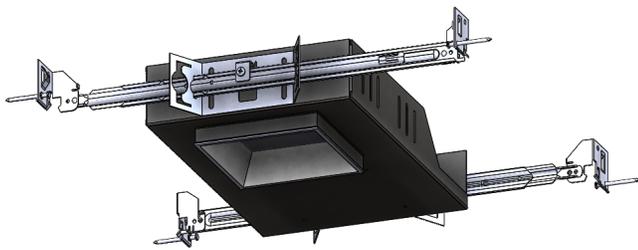


**1.**

Mount the Universal Bar Hanger into the t-bar or stud

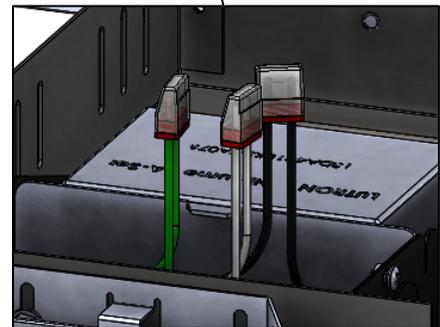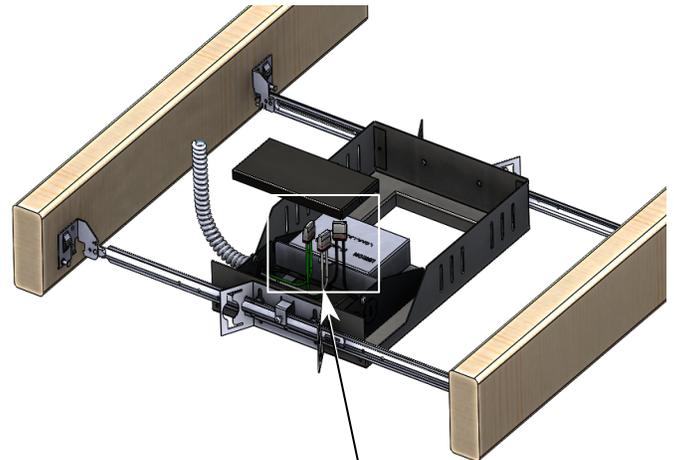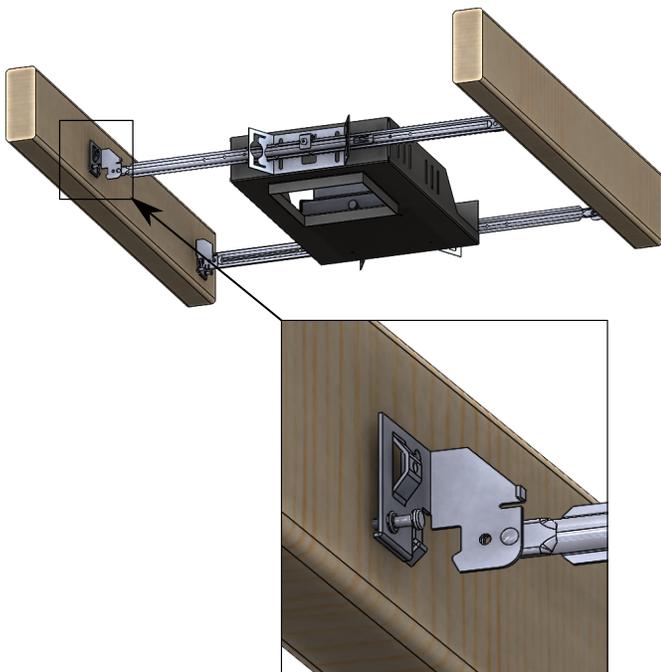


**3.**

Install the drywall/sheetrock.

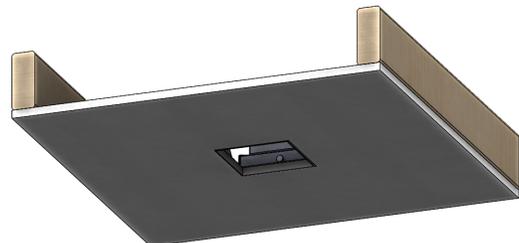


**4.**

Install the square mesh by screwing into the drywall

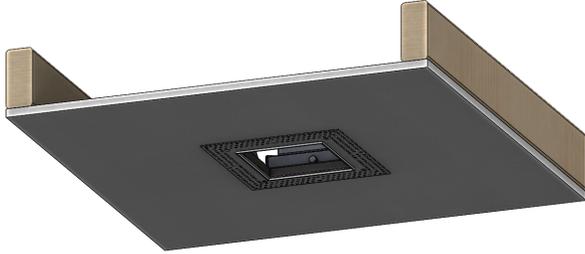

**5.**

Mud in with a wider spatula to make it seamless..

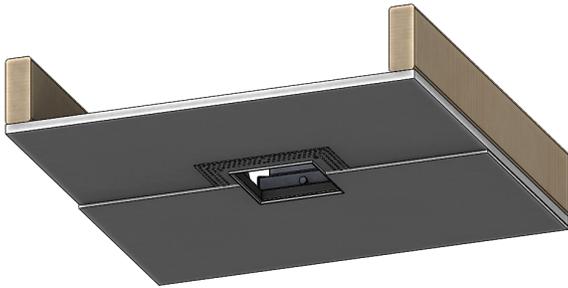

**6.**

Connect the connectors and insert the trim into the housing..

