

LB8000-16-SB-ST
Outdoor Strip Light
IP67



FEATURES

The LB8000-16-SB-ST Lumi-PRO LED Strip Light is a highly versatile, side-bending flexible neon linear lighting solution designed for both indoor and outdoor applications. It offers a wide range of color temperatures – 2700K, 3000K, 3500K, 4000K, 5000K, and 6500K – providing flexibility to create the desired ambiance and lighting effects in a variety of environments.

Engineered for easy installation, it can be seamlessly integrated into different spaces and surface-mounted on walls, ceilings, or furniture using optional mounting brackets (sold separately). This makes it suitable for architectural, decorative, and functional lighting in both residential and commercial settings. Typical applications include outdoor and wet locations, cove lighting, architectural accents, and handrails.

Max run up to 32 ft

Indoor-Outdoor/Wet Location (IP67)

Side Bend

Materials: PVC (Polyvinyl Chloride), high temperature resistant

Warranty: 5 years for indoor and 3 years for outdoor limited warranty

Average lifetime: L70 > 60,000 hours, reported

Color Temp.	4.7W/FT	Lm/W
2700K	290lm/ft	61lm/W
3000K	290lm/ft	62lm/W
3500K	305lm/ft	65lm/W
4000K	310lm/ft	66lm/W
5000K	300lm/ft	64lm/W
6500K	290lm/ft	62lm/W

MOUNTING TRACK

FNC-1617-5




Bendable Aluminum Track
19" Length

FNC-1617-1




Bendable Aluminum Track
39" Length

LB8000-16-CH-FL




Flanged channel
39" Length

LB8000-16-CH




Flangeless channel
39" Length

LB8000-16-CH-BR



Flangeless Bracket
1.3" Length

LB8000-16-CH-FL-BR



Flanged Bracket
1.3" Length

LB8000-16-PC-CLIP-BAG
50 Clips per Bag





Polycarbonate Mounting Clip
L0.63 x W0.79 x H0.51 in

TECHNICAL DETAILS




Power	4.7W/FT
Voltage	24V
IP	IP67
CRI	95+
LED Qty	42/FT
Max Run(ft)	32 FT
Cutting Length	Every 1.97" / (field-cuttable)
Dimensions	W0.63" X H0.69"
Working Temp.	-20°C to +60°C / -4°F to +140°F

MINIMUM BENDING DIAMETER: 4.7 in (120 mm)

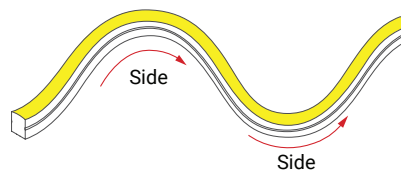

Do not bend the Flex-Neon tape light beyond Ø4.7" (120 mm), as this may cause damage and will not be covered under warranty.


DIMENSIONS

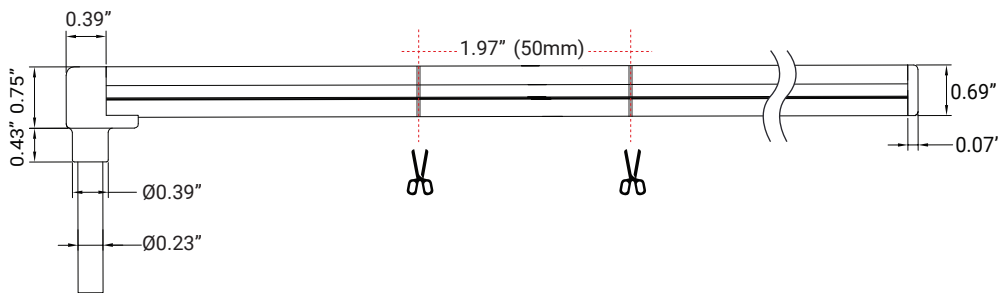

The tape light comes with a 12-inch standard-length female barrel connector with anti-wicking, attached to the bottom side of one end, along with an accessory kit.

Luminous Intensity Distribution Diagram

2700K

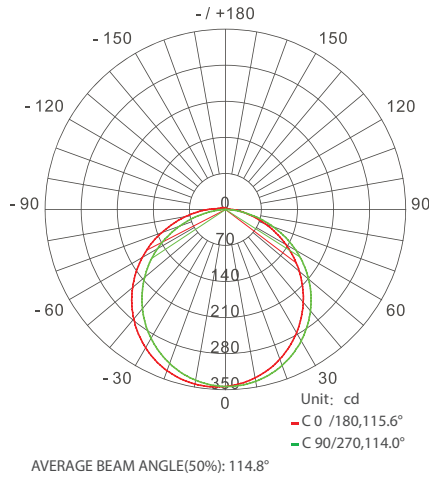

Flux Out: 743.2lm

Height	Eavg	Emax	Beam Angle: 113.98°	Diameter
0.5m	399.1,1417lx	153.94cm		
1.0m	99.77,354.1lx	307.88cm		
1.5m	44.34,157.4lx	461.82cm		
2.0m	24.94,88.53lx	615.76cm		
2.5m	15.96,56.66lx	769.70cm		
3.0m	11.09,39.35lx	923.64cm		
3.5m	8.144,28.91lx	1077.58cm		
4.0m	6.235,22.13lx	1231.52cm		
4.5m	4.927,17.49lx	1385.45cm		
5.0m	3.991,14.17lx	1539.39cm		

ACCESSORIES

LB8000-16-EC
(2 End caps Included)



Silicone end cap
0.7"x0.7"x0.75"

LB8000-16-EC-PF-EF
(2 End caps Included)



Silicone end cap power feed
1.1"x0.7"x0.7"

LB8000-16-EC-PF-BF
(2 End caps Included)



Silicone end cap Side/bottom power feed
1.1"x0.9"x0.75"

WL-BCF-2P-WHT
(1 Piece Included)



Female Barrel Connector with Anti-Wicking ferrule
12" Length

WL-BCM-2P-WHT
(2 Pieces Included)



Male Barrel Connector
72" Length

ORDERING SELECTION

Example: LB8000-16-SB-ST-4.7W-32F-30K-24V

SERIES	WATTAGE	LENGTH	CCT	VOLTAGE	ACCESSORIES	DRIVER
LB8000-16-SB-ST	4.7W - 4.7W/ft	32F - 32ft/Roll CUS_ - Custom 1 (Cutting length every 1.97")	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K 65K - 6500K	24V - 24V	FNC-1617-5 - Alum. Track 19" Length FNC-1617-1 - Alum. Track 39" Length LB8000-16-CH-FL - Flanged Alum. Channel LB8000-16-CH - Flangeless Alum. Channel LB8000-16-CH-FL-BR - Flanged Alum. Bracket LB8000-16-CH-BR - Flangeless Alum. Bracket LB8000-16-PC-CLIP-BAG - PC mounting clip (50 clips per bag) LB8000-16-EC - Silicone end cap/end LB8000-16-EC-PF-EF - Silicone end cap/power feed LB8000-16-EC-PF-BF - Silicone end cap/side bottom power feed WL-BCF-2P-WHT - Female Barrel Connector 12" Length WL-BCM-2P-WHT - Male Barrel Connector 72" Length KIT-ACC-LB8000-16-ST - Accessory Kit (INCLUDED) 2 end caps, 2 power feed end caps, 2 bottom power feed end caps, 1 female barrel connector, and 2 male barrel connectors.	Refer to the next pages for available options.

CONTROLLERS

LB-2830A - RF single color controller
LB-2833N-K5-MONO - RF single color dimmer
LED25W-24 - Power supply
LB-1009EAWI - RF+WiFi receiver

1. When cutting in the field, wiring accessories must be sealed with UV glue and cured using UV light to achieve an IP65 rating. For optimal results, we recommend customizing the lengths at the factory, as cutting the tape light in the field may damage the IP67-rated protection.

Static White / Wall Controller (RF Signal)

This solution enables the strip light to function with a wall controller (RF signal). It includes the following components:


Driver – Powers the strip light.

Receiver – Receives signals from the wall controller to control the strip light.

Wall Controller (RF Signal) – Used to control the strip light remotely.

LED25W-24 Power Supply – Connected to the wall controller to convert the 120V AC from the wall outlet to 24V DC, which is necessary for the controller to function.

This configuration ensures seamless control of the strip light while maintaining the necessary power conversion and signal reception.

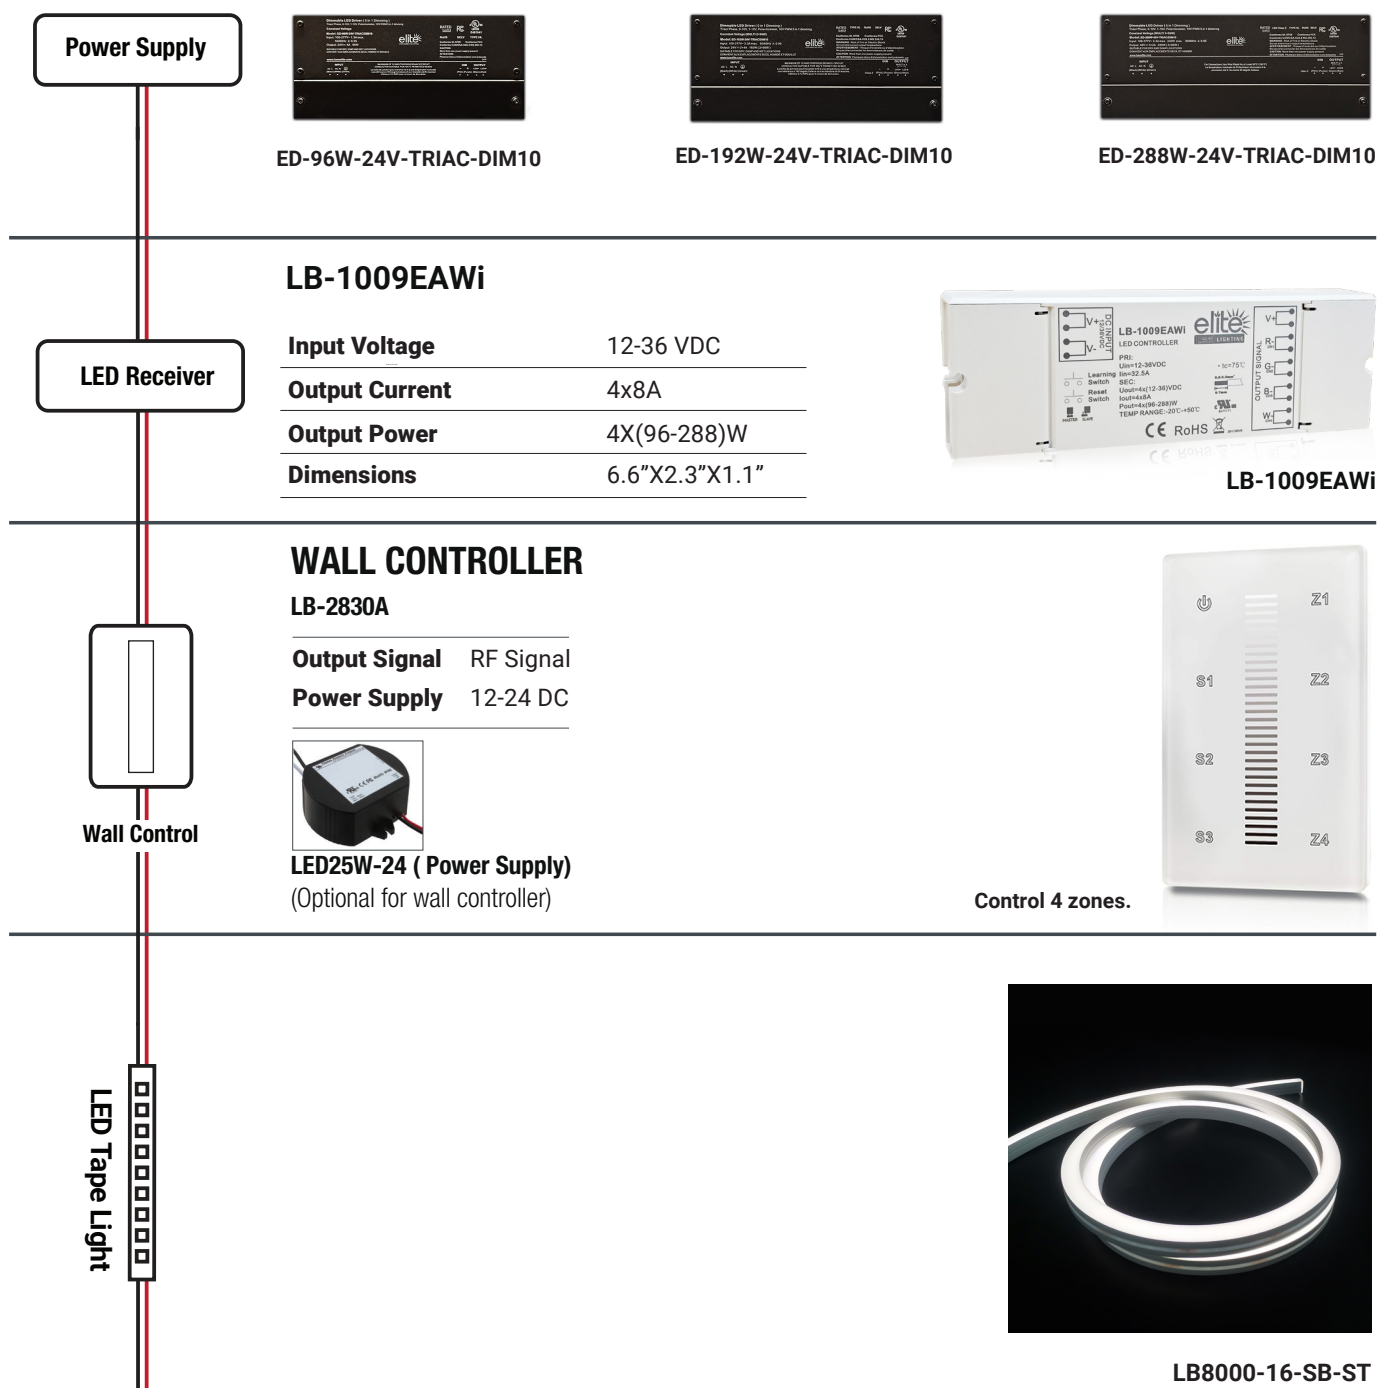

Static White / Wall Dimmer Controller (RF Signal)


This solution enables the strip light to function with a wall dimmer controller (RF signal). It includes the following components:

Driver – Powers the strip light.

Receiver – Receives signals from the wall dimmer controller to control the strip light.


Wall Dimmer Controller (RF Signal) – Used to control the strip light remotely, powered by a 3V CR2032 battery.

This configuration ensures seamless control of the strip light while maintaining the necessary signal reception.

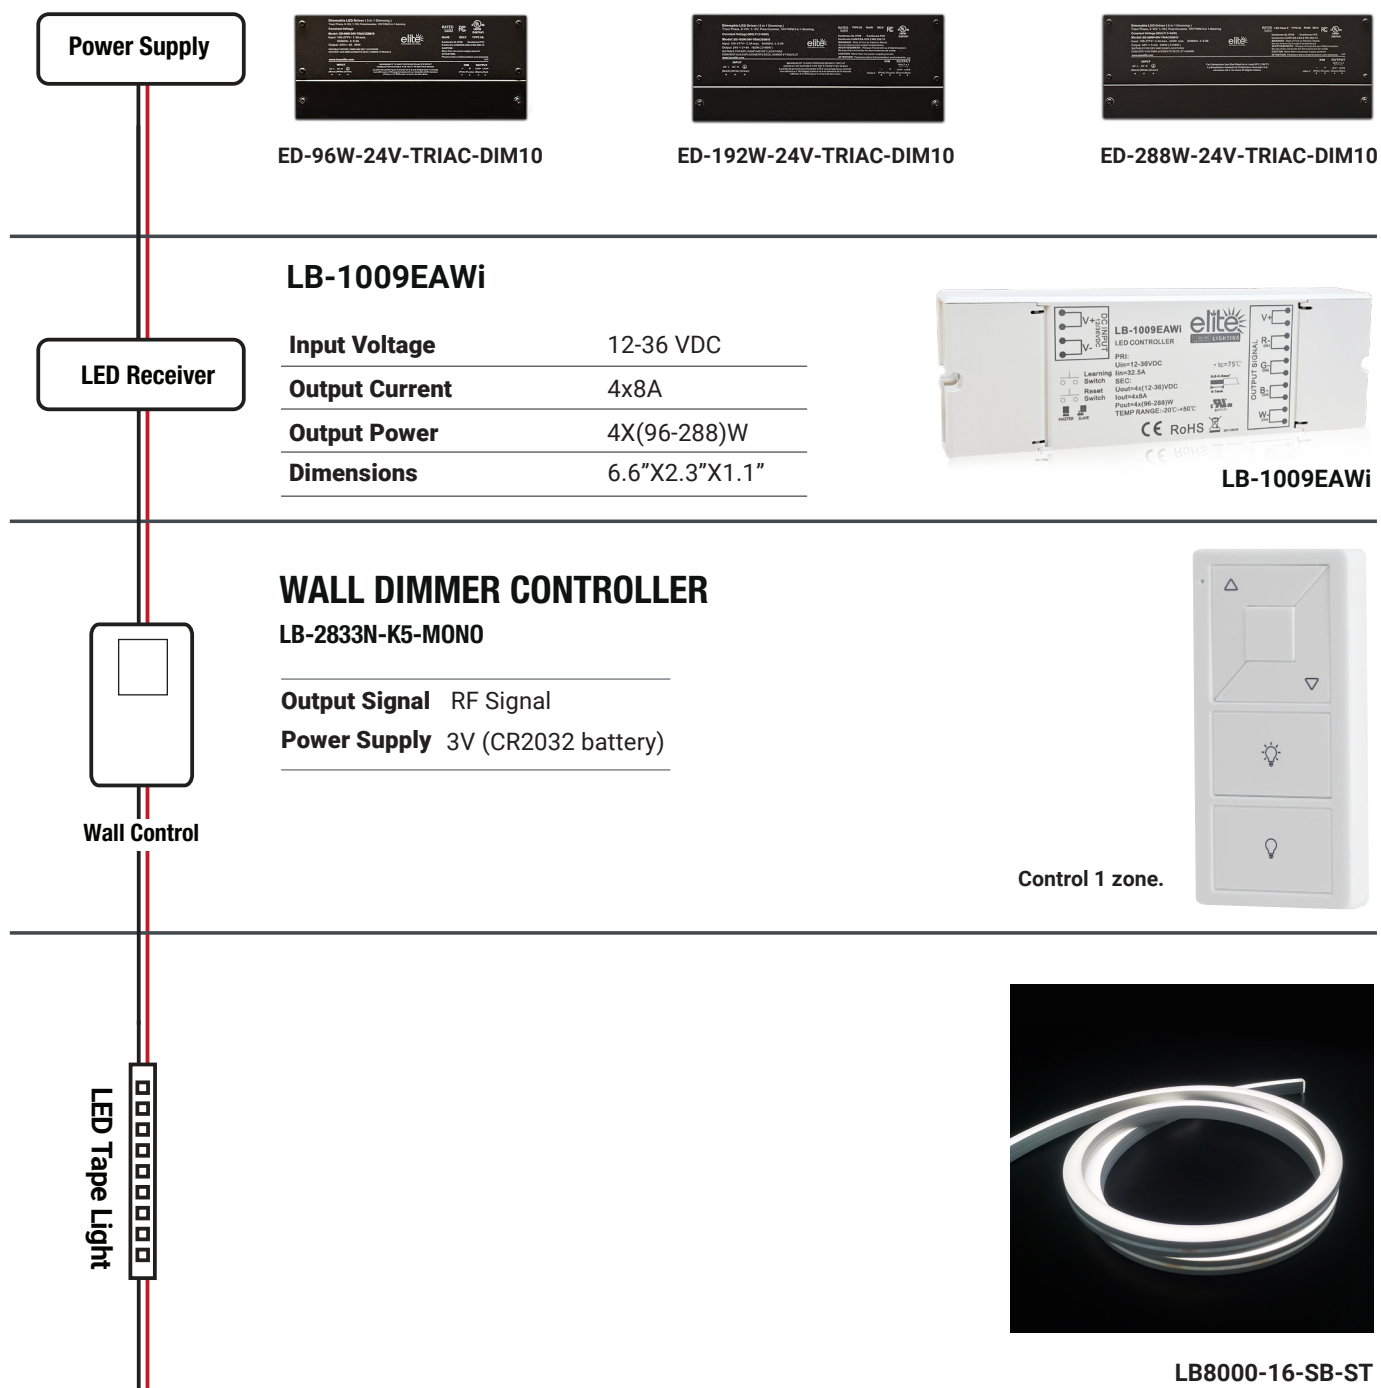


Triac-Phase Cut/Triac ELV/0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable
PN: ED-30W-24V-TRIAC/DIM10


Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-30W-24V-TRIAC/DIM10	100-277VAC	24V	30W	1.25A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS

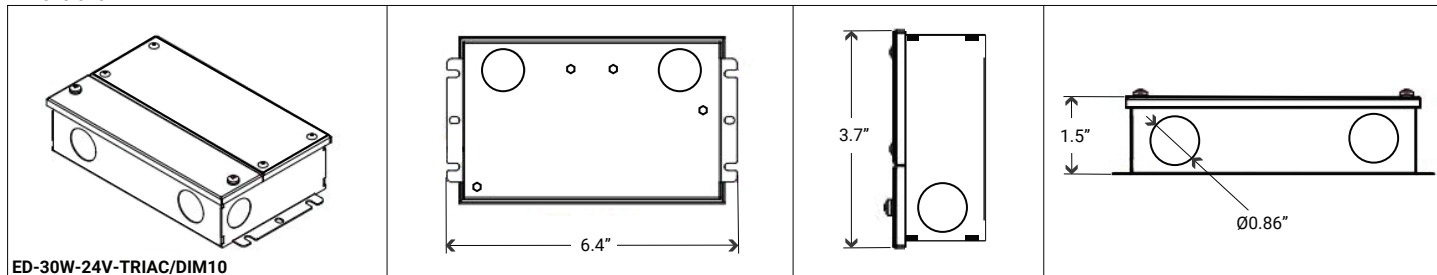Dimensions

PN: ED-60W-24V-TRIAC/DIM10

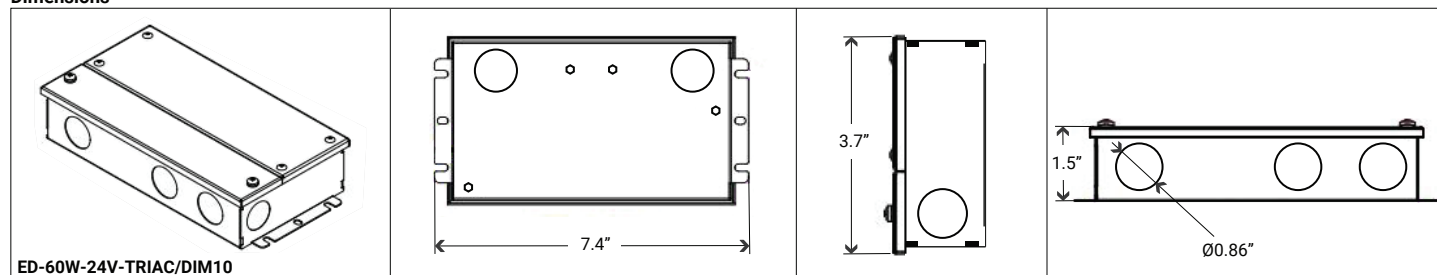Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-60W-24V-TRIAC/DIM10	100-277VAC	24V	60W	2.5A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions

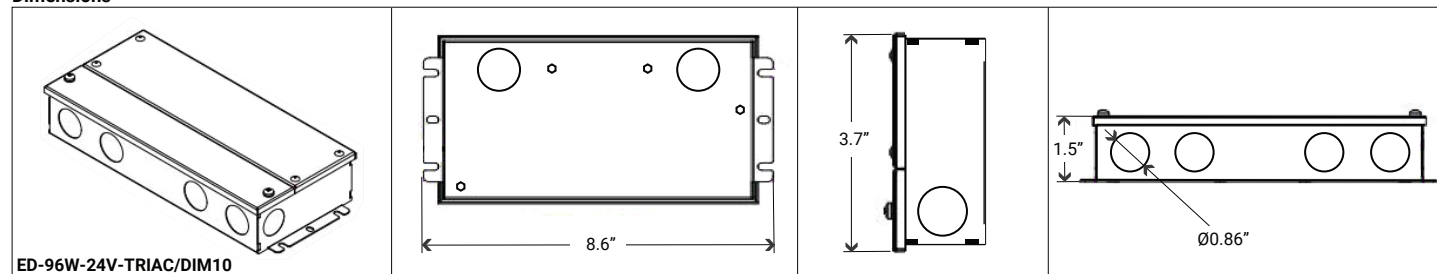PN: ED-96W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-96W-24V-TRIAC/DIM10	100-277VAC	24V	96W	4A	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions


Triac-Phase Cut/Triac ELV/0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable
PN: ED-192W-24V-TRIAC/DIM10

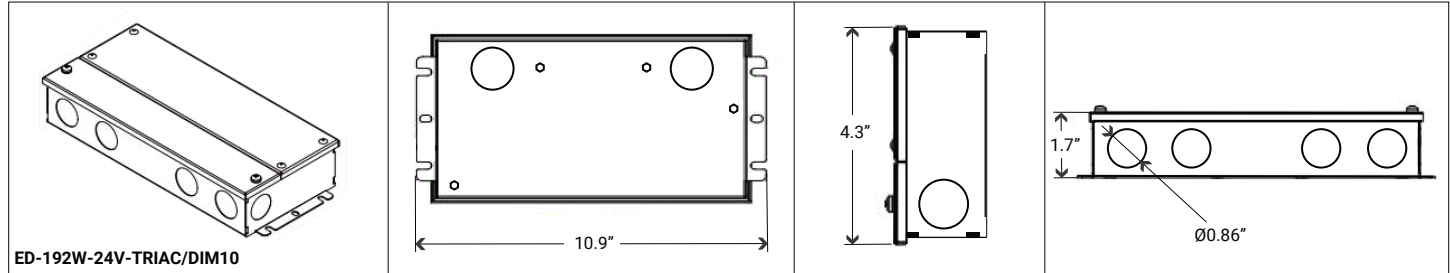
Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-192W-24V-TRIAC/DIM10	100-277VAC	24V	192W	Multi 2X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS

Dimensions

PN: ED-288W-24V-TRIAC/DIM10

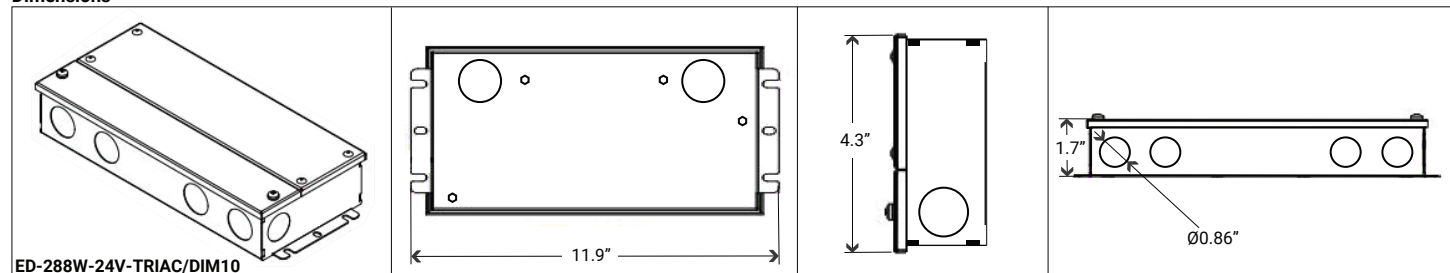Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-288W-24V-TRIAC/DIM10	100-277VAC	24V	288W	Multi 3X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, FCC, Class 2, RoHS


Dimensions

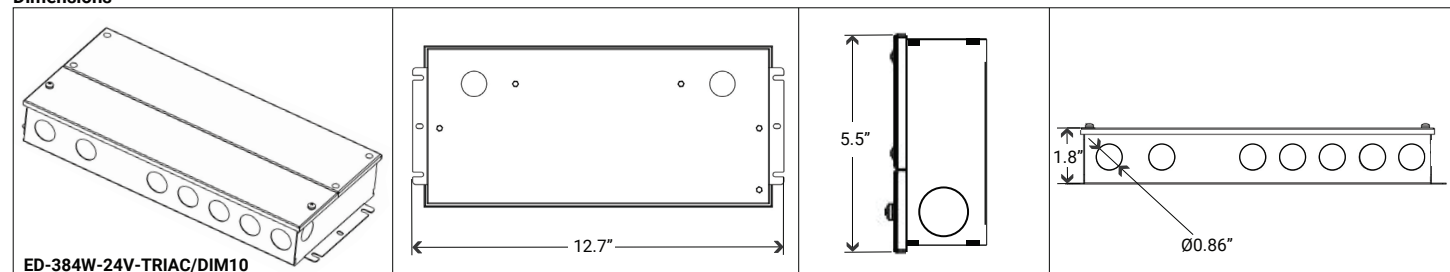PN: ED-384W-24V-TRIAC/DIM10

Model	Input Voltage	Output Voltage	Wattage	Max. Output current	Frequency	Location	Certificate
ED-384W-24V-TRIAC/DIM10	110-277VAC	24V	384W	Multi 4X96W	50/60Hz	Dry, Damp, and Wet locations	UL, cUL, Class 2, RoHS

Dimensions


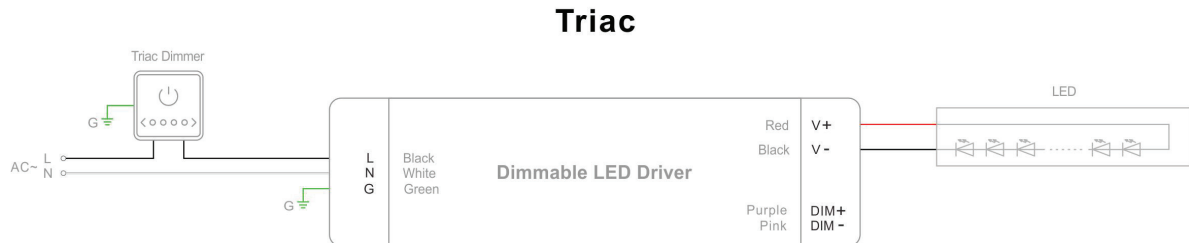
Dimming Operation and Connecting Diagram

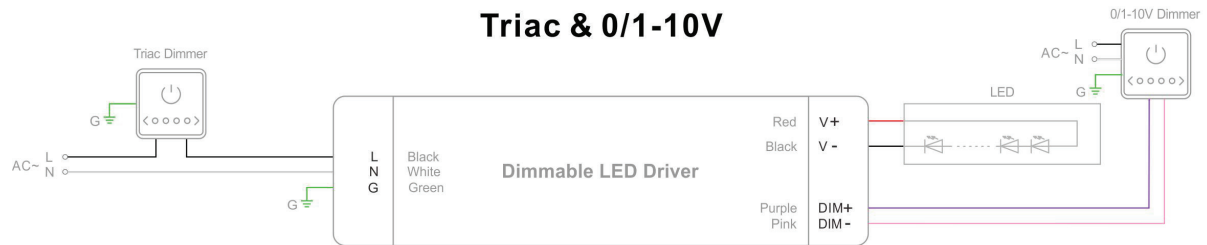- Using two ways of dimming at the same time, you must be assured that LED lighting is up to the max. Brightness then you could operate with the other dimming;






Using one dimming ---TRIAC/Phase cut dimming

- The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase /Triac dimmer or lighting system.
- Working with forward phase, MLV and Reverse phase , ELV, TRIAC dimmers or light system.
- Min. loading is about 10%
- Please try to use dimmers with power at least 1.5 times as the output power of the driver.



Using one dimming ---0-10/ 1-10V/ 10V PWM/ Potentiometer dimming

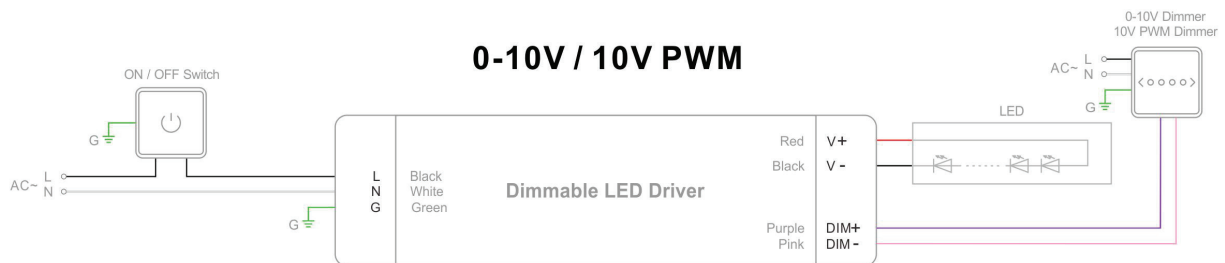

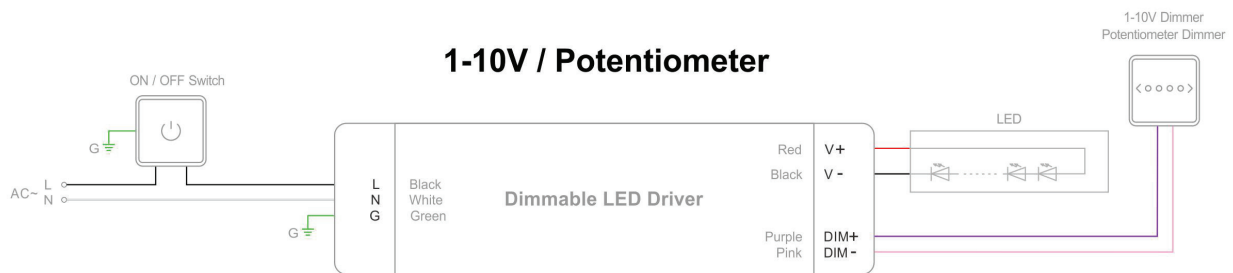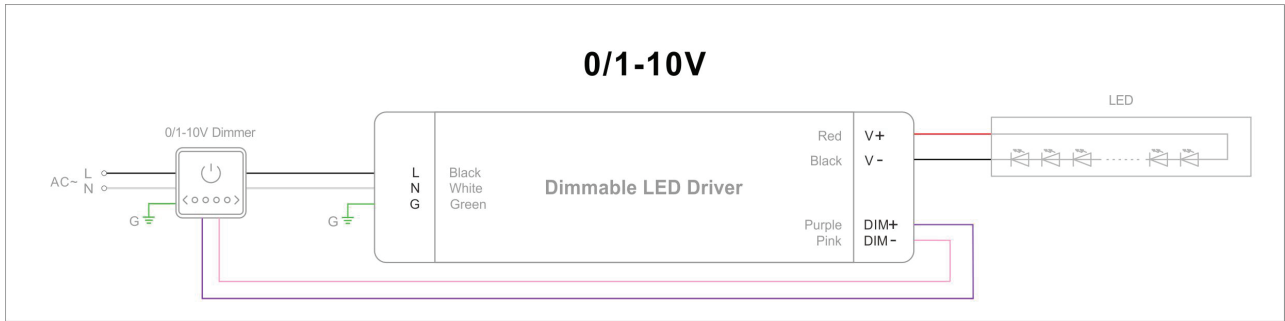

Triac/Phase cut & 0-10V/1-10V PWM/Potentiometer (5 in 1) Dimmable

Constant Voltage TRIAC Dimmable Driver

PN: HBL040-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL040-AW-24-DA	120-277VAC	24VDC	40W	1.66A	50/60Hz	Dry or Damp location	ETL, Class 2

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

PN: HBL060-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL060-AW-24-DA	120-277VAC	24VDC	60W	2.5A	50/60Hz	Dry or Damp location	ETL, Class 2



TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

PN: HBL096-AW-24-DA

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Frequency	Location	Certificate
HBL096-AW-24-DA	120-277VAC	24VDC	96W	4A	50/60Hz	Dry or Damp location	ETL, Class 2

TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

DIMENSIONS

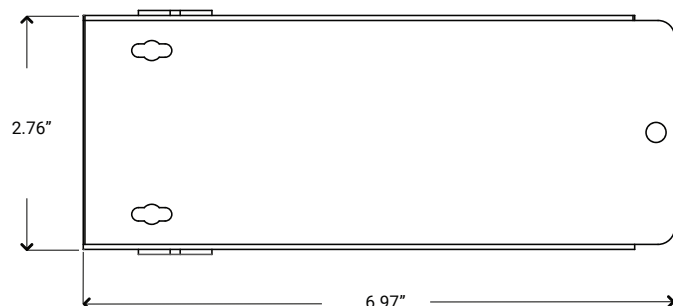
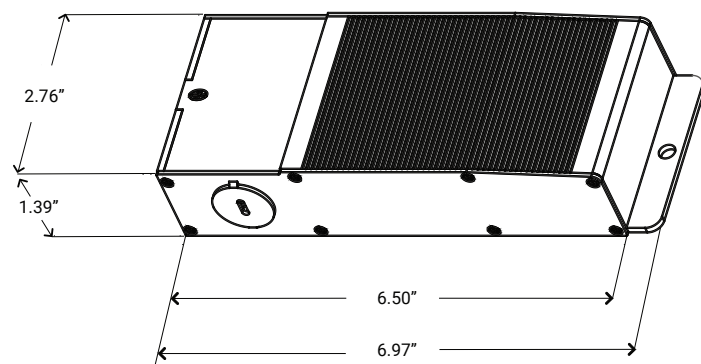


PN: HBL150-AW-24-DI

Model	Input Voltage	Output Voltage	Wattage	Rated Current	Location	Certificate
HBL150-AW-24-DI	120-277VAC	24VDC	150W	6.25A	Dry or Damp location	ETL, Class P


TRIAC Dimming for 120VAC / Non-Dimming for 277VAC

DIMENSIONS

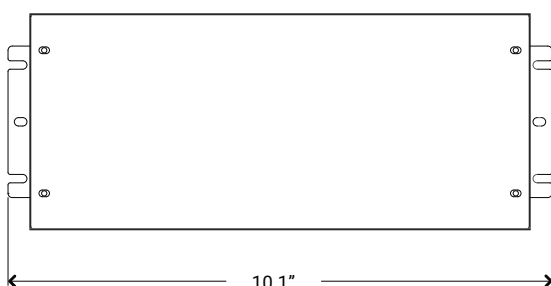

Constant Voltage TRIAC Dimmable Driver

Connecting Diagram

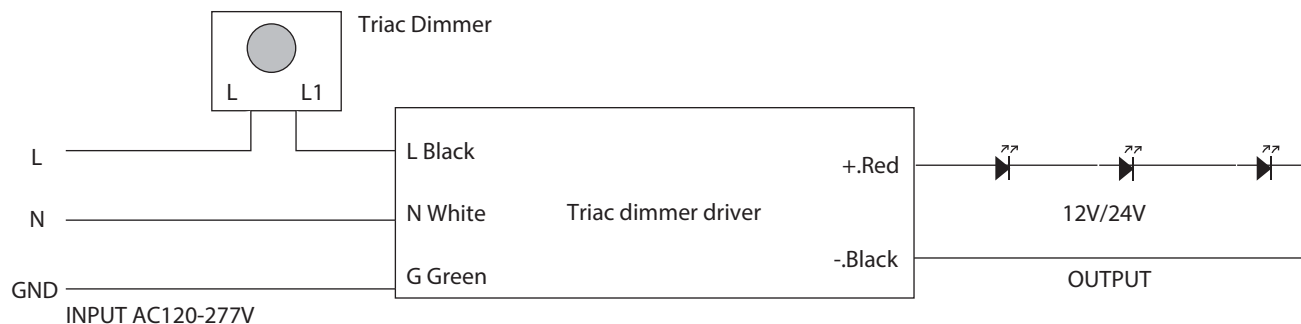

Dimmer Compatible Chart

Brand	Series	Model	Load	Dimmability
Lutron	Ariadni	AYCL-153P	150W	10%-100%
	Diva	DV-600PR	600W	1%-100%
	Diva	DVCL-153P	150W	10%-100%
	Maestro	MACL-153MH	600W	10%-100%
	Maestro Wireless	MRF2-6CL	150W	10%-100%
	Rotary	D-600P	600W	10%-100%
	Electronic(ELV)	NTELV-300P	600W	10%-100%
	Skylark	S-600P	600W	10%-100%
	Skylark Conytour	CT-600P	600W	1%-100%
	Skylark Conytour	CTCL-153P	150W	10%-100%
	Toggler	TG-600P	600W	10%-100%
	Toggler	TCCL-153P	150W	10%-100%
Leviton	Sureslide	6633	600W	10%-100%
	Sureslide Decora	6674	600W	20%-100%
	Trimatron	6602	600W	20%-100%
	ILLVMATECH	IPL06	600W	1%-100%
Legrand	Adorne	ADTP703TU	700W	20%-100%
	Harmony	H703PTW	700W	10%-100%
Cooper	Aspire	9540	1000W	10%-100%
	Devine	DAL06P	300W	10%-100%



LB-2830A RF Single Color Controller

- Ultra-sensitive, high-strength glass touch panel features a color line for accurate, fast, and precise brightness control.
- Control 4 different zones separately or synchronously with endless receivers in each zone.
- Save 3 brightness or scenes for each zone.
- 256-level brightness adjustment for each white.
- Receivers can work with WiFi-RF converter after installing "EasyLighting" app on IOS and android systems.

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	12-24 VDC
Power Consumption	<20 mA
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	4.7"X2.9"X1.1"
Mounting	Wall Mount
Color	White

Certifications	FCC / RoHS
Zones	4
Frequency	916.5MHz
Surface	Glass
Control	Single Color
Warranty	5 Years limited warranty




LB-2833N-K5-MONO Single Color Dimmer

RF wireless Single Color Remote can control 1 zone of receiver. This single color controller is compatible with all universal series RF receivers. **One receiver can be paired with a maximum of 8 remote controllers.** This device contains a button lithium battery that should be stored and disposed of properly. **DO NOT expose the device to moisture.**

TECHNICAL DETAILS

Output Signal	RF Signal
Power Supply	3V (CR2032 battery)
Operating Temperature	0-40°C / 32°F-104°F
Dimensions	2.5"X1.2"X0.35"
Color	White

Certifications	FCC / RoHS
Zones	Control 1 Zone of receiver
Frequency	916.5MHz
Rated	IP20
Warranty	5 Years limited warranty

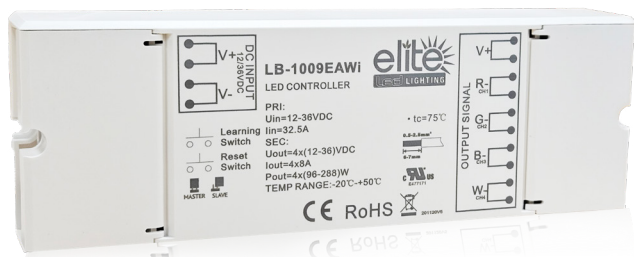

LB-1009EAWI RF+WiFi Receiver/LED Controller 4Channels

The RGBW controller LB-1009EAWI is a 12-36 VDC constant voltage RF and WiFi controller with 4 channel output, offering 8A per channel. It is compatible with a variety of RF remotes and apps installed on iOS and Android systems, enabling control of single-color, dual-color LEDs, and RGBW LEDs.

Multiple zones can be controlled separately or synchronously with endless receivers in each zone. Built-in changing patterns are available and can be saved to each zone. The brightness of each R, G, B, W channel can be adjusted separately to achieve millions of changing colors.

Thanks to the built-in WiFi to RF module, a significant advantage of this WiFi controller is its compatibility with RF remotes and apps on iOS and Android systems directly, without the need for a WiFi-RF converter.

A free app is available (Easylighting) from the App Store and Google Play. Simply download it on your iOS or Android device, then search and connect your mobile device WLAN to the WiFi controller network.

TECHNICAL DETAILS

Input Voltage	12-36 VDC
Output Current	4x8A
Output Power	4x(96-288)W
Dimensions	6.6"X2.3"X1.1"

Frequency	869.5/916.5/434mhz
Certifications	FCC / RoHS
Color	White
Warranty	5-Years limited warranty



LED25W-24 (Power Supply) Optional for Wall Controller

Total Power: 25 Watts
Input Voltage: 100-277 VAC
UL Dry & Damp Location Rated
IP66
High Efficiency
High Power Factor
Analog Dimming (0-10V)
Black Magic Thermal Advantage, Plastic Housing