

QUICK SHIP GUIDE



RESIDENTIAL
INDUSTRIAL
COMMERCIAL





2019
EDITION 2

LED SMALL APERTURE ARCHITECTURAL DOWNLIGHTING

Achieve all of your lighting application objectives with only one universal high-performance architectural housing

ER3-LED-IC

LED ER3 Flanged OR Trim-less Recessed with Tool-less Adjustability

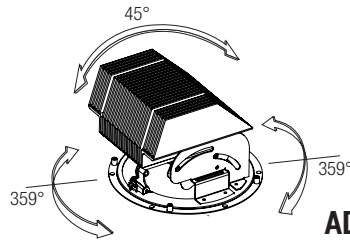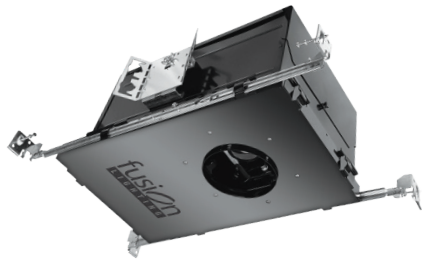

UPTO
1200
LUMENS



IC
RATED

ADJUSTABLE

HIGH PERFORMANCE	TYPE	DELIVERED LUMENS/DRIVER			VOLTAGE	OPTICS	CCT-CRI	EMERGENCY OPTIONS	FLANGE OPTIONS	MOUNTING OPTIONS
	SERIES	700L SERIES	900L SERIES	1200L SERIES						
	ER3-LED-IC	☐ 700L-DIM10	☐ 900L-DIM10	☐ 1200L-DIM10	☐ 120 ☐ 277 ☐ 347 ☐ MVOLT (DIM10 only)	☐ ND-10 (10°) ☐ ND-18 (18°) ☐ MD-25 (25°) ☐ MD-35 (35°) ☐ WD-50 (50°)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	☐ F - (Flanged For Round or Square Trim Options) ☐ ER3-TL - (Trim-less for Round Trim Options) ☐ ES3-TL - (Trim-less for Square Trim Options) Trim-less accessory shipped separately	☐ Blank-Standard bar hangers (included) ☐ BP31 - 27" C-channel bar hangers ☐ RIF - RIF filter
		☐ 700L-DIMTR	☐ 900L-DIMTR	☐ 1200L-DIMTR						
		☐ 700L-LUTH	☐ 900L-LUTH	☐ 1200L-LUTH						
		☐ 700L-LUT2W ²	☐ 900L-LUT2W ²	☐ 1200L-LUT2W ²						
		☐ 700L-ELD010-1	☐ 900L-ELD010-1	☐ 1200L-ELD010 -1						
		☐ 700L-ELDODALI -1	☐ 900L-ELDODALI -1	☐ 1200L-ELDODALI -1						
		☐ 700L-ELDODMX -1	☐ 900L-ELDODMX -1	☐ 1200L-ELDODMX -1						
		ADDERS: • LUTH • LUT2W • ELD010-1 • ELDODALI -1 • ELDODMX -1								
Delivered Beam Spreads depends on actual Trim specified. Please View IES files for details.										

ER3-LED

LED ER3 Non-IC Flanged OR Trim-less Recessed with Tool-less Adjustability

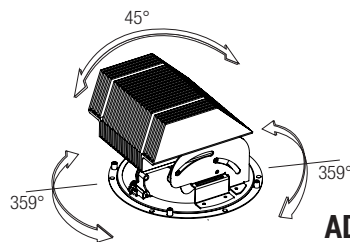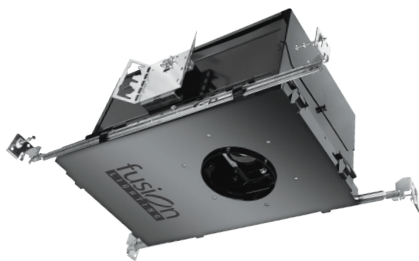

UPTO
2000
LUMENS

ADJUSTABLE

	TYPE	DELIVERED LUMENS/DRIVER				VOLTAGE	OPTICS	CCT-CRI	EMERGENCY OPTIONS	FLANGE OPTIONS	MOUNTING OPTIONS
	SERIES	700L SERIES	900L SERIES	1200L SERIES	2000L SERIES						
HIGH PERFORMANCE	ER3-LED	☐ 700L-DIM10	☐ 900L-DIM10	☐ 1200L-DIM10	☐ 2000L-DIM10	☐ 120	☐ ND-10 (10°)	☐ 27K-90	☐ EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	☐ F - (Flanged For Round or Square Trim Options)	☐ Blank-Standard bar hangers (included)
		☐ 700L-DIMTR	☐ 900L-DIMTR	☐ 1200L-DIMTR	☐ 2000L-DIMTR	☐ 277	☐ ND-18 (18°)	☐ 30K-90			
			☐ 700L-LUTH	☐ 900L-LUTH	☐ 1200L-LUTH	☐ 2000L-LUTH	☐ 347	☐ MD-25 (25°)	☐ 35K-90		☐ ER3-TL - (Trim-less for Round Trim Options)
		☐ 700L-LUT2W ²	☐ 900L-LUT2W ²	☐ 1200L-LUT2W ²	☐ 2000L-LUT2W ²	☐ MVOLT (DIM10 only)	☐ MD-35 (35°)	☐ 40K-90		☐ ES3-TL - (Trim-less for Square Trim Options)	☐ RIF - RIF filter
		☐ 700L-ELD010-1	☐ 900L-ELD010-1	☐ 1200L-ELD010 -1	☐ 2000L-ELD010 -1		☐ WD-50 (50°) Delivered Beam Spreads depends on actual Trim specified. Please View IES files for details.	☐ 50K-85		Trim-less accessory shipped separately	
		☐ 700L-ELD0DALI -1	☐ 900L-ELD0DALI -1	☐ 1200L-ELD0DALI -1	☐ 2000L-ELD0DALI -1						
		☐ 700L-ELD0DMX -1	☐ 900L-ELD0DMX -1	☐ 1200L-ELD0DMX -1	☐ 2000L-ELD0DMX -1						
		ADDERS: • LUTH • LUT2W • ELD010-1 • ELD0DALI -1 • ELD0DMX -1									

Round Trim Round Trim-less

	Round Trim	Round Trim-less	FLANGED OPTIONS
Open			☐ ER3-F-1302 Open Downlight ☐ ER3-F-1328 Lensed Adjustable ☐ ER3-F-1363 Open Wall Wash ☐ ER3-F-1307 Lensed Wall Wash ☐ ER3-F-1314 Pinhole Downlight ☐ ER3-F-1333 Pinhole Adjustable
Lensed			☐ ER3-TL-1302 Open Downlight ☐ ER3-TL-1328 Lensed Adjustable ☐ ER3-TL-1363 Open Wall Wash ☐ ER3-TL-1307 Lensed Wall Wash ☐ ER3-TL-1314 Pinhole Downlight ☐ ER3-TL-1333 Pinhole Adjustable ☐ ER3-TL Mud Ring
Open Adjustable Accent			
Lensed Adjustable Accent			
Pinhole			
Slot			
			TRIM COLOR ☐ W-WH- White ☐ CL-WH- Chrome ☐ SHZ-WH- Satin Haze ☐ BK-WH- Black

Square Trim Square Trim-less

	Square Trim	Square Trim-less	FLANGED OPTIONS
Open			☐ ES3-F-1302 Open Downlight ☐ ES3-F-1328 Lensed Adjustable ☐ ES3-F-1363 Open Wall Wash ☐ ES3-F-1307 Lensed Wall Wash ☐ ES3-F-1314 Pinhole Downlight ☐ ES3-F-1333 Pinhole Adjustable
Lensed			☐ ES3-TL-1302 Open Downlight ☐ ES3-TL-1328 Lensed Adjustable ☐ ES3-TL-1363 Open Wall Wash ☐ ES3-TL-1307 Lensed Wall Wash ☐ ES3-TL-1314 Pinhole Downlight ☐ ES3-TL-1333 Pinhole Adjustable ☐ ES3-TL Mud Ring
Open Adjustable Accent			
Lensed Adjustable Accent			
Pinhole			
			TRIM COLOR ☐ W-WH- White ☐ CL-WH- Chrome ☐ SHZ-WH- Satin Haze ☐ BK-WH- Black

LED SMALL APERTURE ARCHITECTURAL DOWNLIGHTING

Achieve all of your lighting application objectives with only one universal high-performance architectural housing

ER3-SHAL-LED-IC

LED ER3 IC Flanged OR Trim-less Recessed Shallow Adjustable with Tool-less Adjustability



UPTO
1200
LUMENS

IC
RATED

	TYPE	DELIVERED LUMENS/DRIVER			VOLTAGE	OPTICS	CCT-CRI	EMERGENCY OPTIONS	FLANGE OPTIONS	MOUNTING OPTIONS
	SERIES	700L SERIES	900L SERIES	1200L SERIES						
HIGH PERFORMANCE	ER3-SHAL-LED-IC	☐ 700L-DIM10 ☐ 700L-DIMTR ☐ 700L-LUTH ☐ 700L-LUT2W ² ☐ 700L-ELD010-1 ☐ 700L-ELD0DALI -1 ☐ 700L-ELD0DMX -1	☐ 900L-DIM10 ☐ 900L-DIMTR ☐ 900L-LUTH ☐ 900L-LUT2W ² ☐ 900L-ELD010-1 ☐ 900L-ELD0DALI -1 ☐ 900L-ELD0DMX -1	☐ 1200L-DIM10 ☐ 1200L-DIMTR ☐ 1200L-LUTH ☐ 1200L-LUT2W ² ☐ 1200L-ELD010 -1 ☐ 1200L-ELD0DALI -1 ☐ 1200L-ELD0DMX -1	☐ 120 ☐ 277 ☐ 347 ☐ MVOLT (DIM10 only)	☐ ND-10 (10°) ☐ ND-18 (18°) ☐ MD-25 (25°) ☐ MD-35 (35°) ☐ WD-50 (50°)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	☐ F - (Flanged For Round or Square Trim Options) ☐ ER3-TL - (Trim-less for Round Trim Options) ☐ ES3-TL - (Trim-less for Square Trim Options) Trim-less accessory shipped separately	☐ Blank-Standard bar hangers (included) ☐ BP31 - 27" C-channel bar hangers ☐ RIF - RIF filter
		ADDERS: • LUTH• LUT2W • ELD010-1 • ELD0DALI -1 • ELD0DMX -1			Delivered Beam Spreads depends on actual Trim specified. Please View IES files for details.					

ER3-SHAL-LED

LED ER3 Non-IC Flanged OR Trim-less Recessed Shallow Adjustable with Tool-less Adjustability



UPTO
1200
LUMENS

	TYPE	DELIVERED LUMENS/DRIVER				VOLTAGE	OPTICS	CCT-CRI	EMERGENCY OPTIONS	FLANGE OPTIONS	MOUNTING OPTIONS
	SERIES	700L SERIES	900L SERIES	1200L SERIES	2000L SERIES						
HIGH PERFORMANCE	ER3-SHAL-LED	☐ 700L-DIM10 ☐ 700L-DIMTR ☐ 700L-LUTH ☐ 700L-LUT2W ² ☐ 700L-ELD010-1 ☐ 700L-ELD0DALI -1 ☐ 700L-ELD0DMX -1	☐ 900L-DIM10 ☐ 900L-DIMTR ☐ 900L-LUTH ☐ 900L-LUT2W ² ☐ 900L-ELD010-1 ☐ 900L-ELD0DALI -1 ☐ 900L-ELD0DMX -1	☐ 1200L-DIM10 ☐ 1200L-DIMTR ☐ 1200L-LUTH ☐ 1200L-LUT2W ² ☐ 1200L-ELD010 -1 ☐ 1200L-ELD0DALI -1 ☐ 1200L-ELD0DMX -1	☐ 2000L-DIM10 ☐ 2000L-DIMTR ☐ 2000L-LUTH ☐ 2000L-LUT2W ² ☐ 2000L-ELD010 -1 ☐ 2000L-ELD0DALI -1 ☐ 2000L-ELD0DMX -1	☐ 120 ☐ 277 ☐ 347 ☐ MVOLT (DIM10 only)	☐ ND-10 (10°) ☐ ND-18 (18°) ☐ MD-25 (25°) ☐ MD-35 (35°) ☐ WD-50 (50°)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	☐ F - (Flanged For Round or Square Trim Options) ☐ ER3-TL - (Trim-less for Round Trim Options) ☐ ES3-TL - (Trim-less for Square Trim Options) Trim-less accessory shipped separately	☐ Blank-Standard bar hangers (included) ☐ BP31 - 27" C-channel bar hangers ☐ RIF - RIF filter
		ADDERS: • LUTH• LUT2W • ELD010-1 • ELD0DALI -1 • ELD0DMX -1				Delivered Beam Spreads depends on actual Trim specified. Please View IES files for details.					

	Round Trim	Round Trim-less		Square Trim	Square Trim-less	
Open			FLANGED OPTIONS ☐ ER3-F-1302 Open Downlight ☐ ER3-F-1328 Lensed Adjustable ☐ ER3-F-1363 Open Wall Wash ☐ ER3-F-1307 Lensed Wall Wash ☐ ER3-F-1314 Pinhole Downlight ☐ ER3-F-1333 Pinhole Adjustable			FLANGED OPTIONS ☐ ES3-F-1302 Open Downlight ☐ ES3-F-1328 Lensed Adjustable ☐ ES3-F-1363 Open Wall Wash ☐ ES3-F-1307 Lensed Wall Wash ☐ ES3-F-1314 Pinhole Downlight ☐ ES3-F-1333 Pinhole Adjustable
Lensed						
Open Adjustable Accent		(Not available for Non-IC)	FLANGED OPTIONS ☐ ER3-TL-1302 Open Downlight ☐ ER3-TL-1328 Lensed Adjustable ☐ ER3-TL-1363 Open Wall Wash ☐ ER3-TL-1307 Lensed Wall Wash ☐ ER3-TL-1314 Pinhole Downlight ☐ ER3-TL-1333 Pinhole Adjustable ☐ ER3-TL Mud Ring		(Not available for Non-IC)	FLANGED OPTIONS ☐ ES3-TL-1302 Open Downlight ☐ ES3-TL-1328 Lensed Adjustable ☐ ES3-TL-1363 Open Wall Wash ☐ ES3-TL-1307 Lensed Wall Wash ☐ ES3-TL-1314 Pinhole Downlight ☐ ES3-TL-1333 Pinhole Adjustable ☐ ES3-TL Mud Ring
Lensed Adjustable Accent		(Not available for Non-IC)			(Not available for Non-IC)	
Pinhole						
Slot		(Not available for Non-IC)				
			TRIM COLOR ☐ W-WH- White ☐ CL-WH- Chrome ☐ SHZ-WH- Satin Haze ☐ BK-WH- Black			TRIM COLOR ☐ W-WH- White ☐ CL-WH- Chrome ☐ SHZ-WH- Satin Haze ☐ BK-WH- Black

ARCHITECTURAL HIGH LUMEN DOWNLIGHTING


UP TO 8000 LUMENS

1% DIMMING STANDARD

4"

HH4-LED

4" Architectural High Lumen LED Downlight

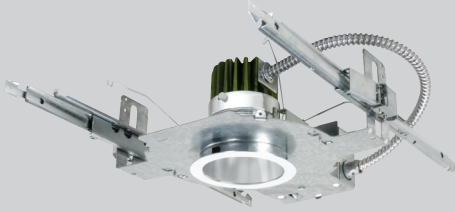

NEW CONSTRUCTION

Example: **HH4-LED-1200L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HH4-LED	☐ 900L ☐ 1200L ☐ 1500L ☐ 2000L ☐ 3000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ MD	☐ 90	☐ EMG

4" High Lumen LED Optics:

ADDITIONAL TRIM COLOR OPTIONS: (CL-SCH)(WT-WH)(SHZ-WH)(W-WH)(SHZ-SHZ)(MB-WH)

TRIM

TRIM-LESS



☐ HH4-4501-CL-WH
Open Reflector w/
Diffuse Lens



☐ HH4-4507-CL-WH
Wall Wash Reflector
w/ Diffuse Lens



☐ HH4-TL-4501-CL
Specular Clear
Reflector



☐ HH4-TL-4507-SHZ
Satin Haze Reflector

4"

HHJ4-LED

4" Architectural High Lumen LED Retrofit Downlight



RETROFIT

Example: **HHJ4-LED-1200L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HHJ4-LED	☐ 900L ☐ 1200L ☐ 1500L ☐ 2000L ☐ 3000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ MD	☐ 90	☐ EMG

4" High Lumen LED Optics:

ADDITIONAL TRIM COLOR OPTIONS: (CL-SCH)(WT-WH)(SHZ-WH)(W-WH)(SHZ-SHZ)(MB-WH)

TRIM

TRIM-LESS



☐ HH4-4501-CL-WH
Open Reflector w/
Diffuse Lens



☐ HH4-4507-CL-WH
Wall Wash Reflector
w/ Diffuse Lens



☐ HH4-TL-4501-CL
Specular Clear
Reflector




☐ HH4-TL-4507-SHZ
Satin Haze Reflector

6"

HH6-LED

6" Architectural High Lumen LED Downlight

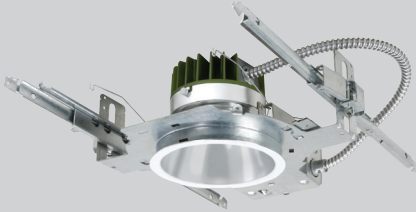

NEW CONSTRUCTION

Example: **HH6-LED-1200L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HHJ6-LED	☐ 900L ☐ 1200L ☐ 2000L	☐ 3000L ☐ 4000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ MD	☐ 90 ☐ EMG

6" High Lumen LED Optics:

ADDITIONAL TRIM COLOR OPTIONS: (CL-SCH)(WT-WH)(SHZ-WH)(W-WH)(SHZ-SHZ)(MB-WH)

TRIM

TRIM-LESS



☐ HH6-6501-CL-WH
Open Reflector w/
Diffuse Lens



☐ HH6-6507-CL-WH
Wall Wash Reflector
w/ Diffuse Lens



☐ HH6-TL-6501-CL
Specular Clear
Reflector



☐ HH6-TL-6507-SHZ
Satin Haze Reflector

6"

HHJ6-LED

6" Architectural High Lumen LED Retrofit Downlight



RETROFIT

Example: **HHJ6-LED-1200L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HHJ6-LED	☐ 900L ☐ 1200L ☐ 2000L ☐ 3000L	☐ 4000L ☐ 6000L ☐ 8000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ MD	☐ 90 ☐ EMG

6" High Lumen LED Optics:

ADDITIONAL TRIM COLOR OPTIONS: (CL-SCH)(WT-WH)(SHZ-WH)(W-WH)(SHZ-SHZ)(MB-WH)

TRIM

TRIM-LESS



☐ HH6-6501-CL-WH
Open Reflector w/
Diffuse Lens



☐ HH6-6507-CL-WH
Wall Wash Reflector
w/ Diffuse Lens



☐ HH6-TL-6501-CL
Specular Clear
Reflector



☐ HH6-TL-6507-SHZ
Satin Haze Reflector

ARCHITECTURAL HIGH LUMEN DOWNLIGHTING

UP TO 8000 LUMENS

1% DIMMING STANDARD

8"

HH8-LED

8" Architectural High Lumen LED Downlight



NEW CONSTRUCTION

Example: **HH8-LED-2000L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HH8-LED	☐ 900L ☐ 1200L ☐ 2000L ☐ 3000L	☐ 4000L ☐ 6000L ☐ 8000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ MD	☐ 90 ☐ EMG

8" High Lumen LED Optics:



☐ **HH8-8501-CL-WH**
Open Reflector w/ Diffuse Lens
O. D.: 9-1/4"



☐ **HH8-8507-CL-WH**
Wall Wash Reflector w/ Diffuse Lens
O. D.: 9-1/4"

ADDITIONAL TRIM COLOR OPTIONS:
(CL-SCH)(WT-WH)(SHZ-WH)
(W-WH)(SHZ-SHZ)(MB-WH)

8"

HHJ8-LED

8" Architectural High Lumen LED Retrofit Downlight



RETROFIT

Example: **HHJ8-LED-2000L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HHJ8-LED	☐ 900L ☐ 1200L ☐ 2000L ☐ 3000L	☐ 4000L ☐ 6000L ☐ 8000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ MD	☐ 90 ☐ EMG

8" High Lumen LED Optics:



☐ **HH8-8501-CL-WH**
Open Reflector w/ Diffuse Lens
O. D.: 9-1/4"



☐ **HH8-8507-CL-WH**
Wall Wash Reflector w/ Diffuse Lens
O. D.: 9-1/4"

ADDITIONAL TRIM COLOR OPTIONS:
(CL-SCH)(WT-WH)(SHZ-WH)
(W-WH)(SHZ-SHZ)(MB-WH)

4"

HH4SQ-LED

4" Square Architectural High Lumen LED Downlight



NEW CONSTRUCTION

Example: **HH4SQ-LED-1200L-DIM10-MVOLT-40K-FL-90-EMG**

CATALOG NO.	PERFORMANCE	DIMMING	CCT	OPTICS	CRI	EMERGENCY
HH4SQ-LED	☐ 900L ☐ 1200L ☐ 1500L ☐ 2000L	☐ DIM10 ☐ LUTRON Hi-LUME	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ MD	☐ 90	☐ EMG

4" SQUARE HIGH LUMEN LED OPTICS

TRIM

TRIM-LESS

☐ LED-4607-CL



Wall Wash Reflector
with Diffuse Lens

☐ LED-4614-CL



Reflector with Tempered
Glass Lens

☐ LED-4615-CL



Reflector with Frosted
Glass Diffuse Lens

☐ LED-TL-4607-CL



Trim-less Wall Wash
Reflector with Diffuse Lens

☐ LED-TL-4614-CL



Trim-less Reflector with
Tempered Glass Lens

☐ LED-TL-4615-CL




Trim-less Reflector
with Frosted Glass Diffuse Lens

LED SHALLOW ARCHITECTURAL DOWNLIGHTING

Achieve all of your lighting application objectives with only one universal high-performance architectural housing

SS4-LED - Shallow Square Housing

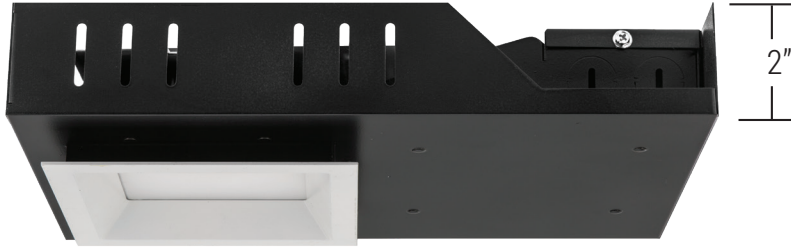

UPTO
2000
LUMENS

TYPE	900L SERIES	1200L SERIES	2000L SERIES	VOLTAGE	EMERGENCY OPTIONS	MOUNTING OPTIONS
SS4-LED	☐ 900L-DIM10 ☐ 900L-DIMTR ☐ 900L-LUTH ☐ 900L-LUT2W ² ☐ 900L-ELD010-.1 ☐ 900L-ELDODALI -.1 ☐ 900L-ELDODMX -.1	☐ 1200L-DIM10 ☐ 1200L-DIMTR ☐ 1200L-LUTH ☐ 1200L-LUT2W ² ☐ 1200L-ELD010 -.1 ☐ 1200L-ELDODALI -.1 ☐ 1200L-ELDODMX -.1	☐ 2000L-DIM10 ☐ 2000L-DIMTR ☐ 2000L-LUTH ☐ 2000L-LUT2W ² ☐ 2000L-ELD010 ☐ 2000L-ELDODALI ☐ 2000L-ELDODMX	☐ 120 ☐ 277 ☐ 347 ☐ MVOLT (DIM10 only)	☐ EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	☐ Blank-Standard bar hangers (included) ☐ BP31 - 27" C-channel bar hangers. ☐ RIF - RIF filter.
SS4-LED-IC	☐ 900L-DIM10 ☐ 900L-DIMTR ☐ 900L-LUTH ☐ 900L-LUT2W ² ☐ 900L-ELD010-.1 ☐ 900L-ELDODALI -.1 ☐ 900L-ELDODMX -.1					
ADDERS: • LUTH • LUT2W • ELD010-.1 • ELDODALI -.1 • ELDODMX -.1						

TRIM TYPE	LUMENS	OPTICS	CCT	FINISH
☐ SS4-F-1428 (Flanged trim) 	☐ 900L ☐ 1200L ☐ 2000L	☐ WD (Wide)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ W-WH
☐ SS4-TL-1428 (Trim-less) 	☐ 900L ☐ 1200L ☐ 2000L	☐ WD (Wide)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ WH

SR4-LED - Shallow Round Housing




UPTO
2000
LUMENS


TYPE	900L SERIES	1200L SERIES	2000L SERIES	VOLTAGE	EMERGENCY OPTIONS	MOUNTING OPTIONS
SR4-LED	☐ 900L-DIM10 ☐ 900L-DIMTR ☐ 900L-LUTH ☐ 900L-LUT2W ² ☐ 900L-ELD010-.1 ☐ 900L-ELDODALI -.1 ☐ 900L-ELDODMX -.1	☐ 1200L-DIM10 ☐ 1200L-DIMTR ☐ 1200L-LUTH ☐ 1200L-LUT2W ² ☐ 1200L-ELD010 -.1 ☐ 1200L-ELDODALI -.1 ☐ 1200L-ELDODMX -.1	☐ 2000L-DIM10 ☐ 2000L-DIMTR ☐ 2000L-LUTH ☐ 2000L-LUT2W ² ☐ 2000L-ELD010 ☐ 2000L-ELDODALI ☐ 2000L-ELDODMX	☐ 120 ☐ 277 ☐ 347 ☐ MVOLT (DIM10 only)	☐ EMG-LED Typical lumen output of the fixture is up to 1000L in emergency mode. Contact the factory for details.	☐ Blank-Standard bar hangers (included) ☐ BP31 - 27" C-channel bar hangers. ☐ RIF - RIF filter.
SR4-LED-IC	☐ 900L-DIM10 ☐ 900L-DIMTR ☐ 900L-LUTH ☐ 900L-LUT2W ² ☐ 900L-ELD010-.1 ☐ 900L-ELDODALI -.1 ☐ 900L-ELDODMX -.1					
ADDERS: • LUTH • LUT2W • ELD010-.1 • ELDODALI -.1 • ELDODMX -.1						

TRIM TYPE	LUMENS	OPTICS	CCT	FINISH
☐ SR4-F-1428 (Flanged trim) 	☐ 900L ☐ 1200L ☐ 2000L	☐ WD (Wide)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ W-WH
☐ SR4-TL-1428 (Trim-less) 	☐ 900L ☐ 1200L ☐ 2000L	☐ WD (Wide)	☐ 27K-90 ☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-85	☐ WH


LED ARCHITECTURAL FLEX LIGHTING



**NO EXTRA COST
FOR ANY CORNER**

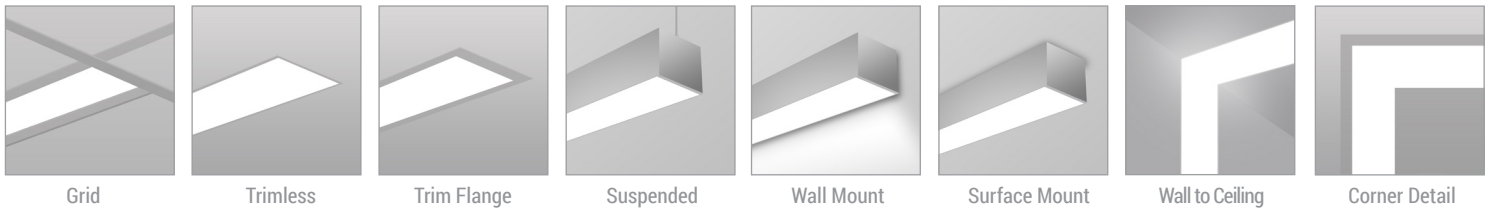

CRI	90+	CCT	30K, 35K, 40K, 50K	LENGTH	2', 4' & 8'
COLOR QUALITY	3-Step MacAdam Ellipse	OPTIC	Medium distributions	APERTURES	2" & 4"
LUMEN OUTPUT	Up to 1000 Lumens / foot	WARRANTY	5 Years	FINISH	White, Silver & Custom Colors

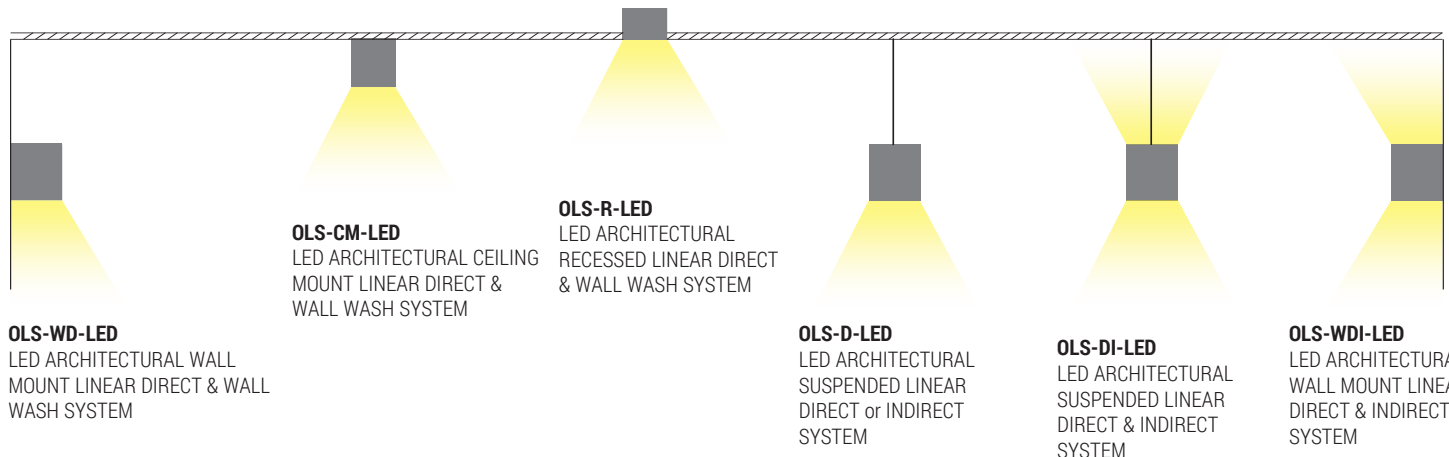

Ordering Information: **OLS-DI-LED-2-REC-W8-L6-D500L-U500L-DIM10-MVOLT-35K-85**

OLS-DI-LED

SERIES

OLS-D-LED
OLS-DI-LED
OLS-R-LED
OLS-CM-LED
OLS-WD-LED
OLS-WDI-LED

WIDTH

2 - 2"
4 - 4"

SHAPE

S - Single Unit
CR - Continuous Run
REC - Rectangle
CUS - Custom
(Consult Factory)

Single Run

2, 4 OR 8'

TOTAL RUN

WIDTH X LENGTH

DIRECT LUMENS

D500L - per ft.
D750L - per ft.
D1000L - per ft.

INDIRECT LUMENS

U500L - per ft.
U750L - per ft.
U1000L - per ft.

NUMBER OF CIRCUITS

1C
(Up and Down Lights Controlled Together)
2C
(Up and Down Lights Controlled Individual)

DIMMING

DIM10 - 0-10V Dimming
(Compatible with
Lutron GRAFIK Eye,Vive)
DIMST - Step Dimming
LUTH - Lutron HiLum
LUT2W - Lutron 2- Wire
LUTFTB - Lutron Fade to Black
ELD010.1 - EldoLED 0-10V
ELD0DALI - EldoLED DALI Type 8
ELD0DMX - EldoLED DMX

VOLTAGE

MVOLT
347*
* Consult factory
for details

CCT

30K
35K
40K
50K

CRI

85

FINISH

WH - White
SI - Silver
BK - Black
RAL - Consult
factory

EMERGENCY

0-EMG-LED

OTHER OPTIONS

FBF - Internal Fast Blow Fuse
SBF - Internal Slow Blow Fuse
RIS - Radio Interf. Sensor
USA - Made in America
Compliance
OCGSS - Aircraft Cable

500L/ft

750L/ft

1000L/ft

4.5 W/ft

7 W/ft

9.5 W/ft

LED SLIM RETROFIT SERIES

SLIM LED LIGHTING



The Elite Slim LED lighting fixture with driver box, combines high quality light output and efficiency, while eliminating the need for a recessed housing. The innovative, slim type IC design allows for easy below the ceiling installation, making it the ideal source for new construction and retrofit applications. The aluminum body provides heat dissipation, and has an ultra thin, slim design. Multiple finishes are available, including white, black and satin nickel.



1" RL173 - LED Gimbal Slim Module

1" LED GIMBAL SLIM FIXTURE



360
LUMENS

NEW ADJUSTABLE
DESIGN

Example: **RL173-360L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL173	☐ 360L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ WH

2" RL271 - LED Round Slim Module

2" LED ROUND FIXTURE W/ CHANGEABLE REFLECTOR



600
LUMENS

1000
LUMENS

Example: **RL271-600L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	TRIM OPTION
☐ RL271	☐ 600L-DIMTR-120 ☐ 1000L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ SHZ-WH	☐ RL271-RT-W-WH ☐ RL271-RT-MB-BK

2" RL275 - LED Round Slim Module

2" LED ROUND FIXTURE WITH BAFFLE



600
LUMENS

Example: **RL275-600L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL275	☐ 600L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ W-WH

2" RL276 - LED Square Slim Module

2" LED SQUARE FIXTURE WITH REFLECTOR



600
LUMENS

Example: **RL276-600L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL276	☐ 600L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ W-WH



LED SLIM RETROFIT SERIES

3"

RL375 - LED Retrofit Module

3" LED FIXTURE WITH HIGHER BRIGHTNESS

550
LUMENS

Example: RL375-550L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL375	☐ 550L-DIMTR-120	☐ 27K ☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ WH ☐ BK ☐ SN

5"

RL575 - LED Retrofit Module

5" LED FIXTURE WITH HIGHER BRIGHTNESS

700
LUMENS900
LUMENS

Example: RL575-900L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL575	☐ 700L-DIMTR-120 ☐ 900L-DIMTR-120	☐ 27K ☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ WH ☐ BK ☐ SN

4"

RL475 - LED Round Retrofit Module

4" LED FIXTURE WITH HIGHER BRIGHTNESS

550
LUMENS700
LUMENS

Available 5 Color Inserts



Example: RL475-700L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
☐ RL475	☐ 550L-DIMTR-120 ☐ 700L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ WH	☐ RL475-RT-BZ ☐ RL475-RT-BK ☐ RL475-RT-CH ☐ RL475-RT-CP ☐ RL475-RT-SN

4"

RL476 - LED Square Retrofit Module

4" LED FIXTURE WITH HIGHER BRIGHTNESS

550
LUMENS700
LUMENS

Example: RL476-700L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL476	☐ 550L-DIMTR-120 ☐ 700L-DIMTR-120	☐ 27K ☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ WH ☐ BK ☐ SN

6"

RL675 - LED Round Retrofit Module

6" LED FIXTURE WITH HIGHER BRIGHTNESS

700
LUMENS900
LUMENS

Available 5 Color Inserts



Example: RL675-700L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
☐ RL675	☐ 700L-DIMTR-120 ☐ 900L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ WH	☐ RL675-RT-BZ ☐ RL675-RT-BK ☐ RL675-RT-CH ☐ RL675-RT-CP ☐ RL675-RT-SN

6"

RL676 - LED Square Retrofit Module

6" LED FIXTURE WITH HIGHER BRIGHTNESS

700
LUMENS900
LUMENS

Example: RL676-700L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL676	☐ 700L-DIMTR-120 ☐ 900L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ WH ☐ BK ☐ SN

8"

RL875 - LED Round Retrofit Module

8" LED FIXTURE WITH HIGHER BRIGHTNESS

2200
LUMENS

Example: RL875-2200L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL875	☐ 2200L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ WH ☐ BK ☐ SN

11"

RL1175 - LED Slim Retrofit Module

11" LED FIXTURE WITH HIGHER BRIGHTNESS

1500
LUMENS

Example: RL1175-1500L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL1175	☐ 1500L-DIMTR-120	☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ WH ☐ BK ☐ SN

LED SLIM RETROFIT SERIES



3" RL373 - LED Retrofit Module

3" LED ADJUSTABLE SLIM RETROFIT



600
LUMENS

NEW
ADJUSTABLE
DESIGN

Example: **RL373-600L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL373	600L-DIMTR-120	30K 35K 40K 50K	90	WH BK SN

4" RL474 - LED Retrofit Module

4" LED ADJUSTABLE SLIM RETROFIT



550
LUMENS

NEW
ADJUSTABLE
DESIGN

Example: **RL474-550L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL474	550L-DIMTR-120	30K 35K 40K 50K	90	WH BK SN

4" RL455 - LED Round Retrofit Module

4" LED INDIRECT SLIM RETROFIT



550
LUMENS

Available 5 Color Inserts



Example: **RL455-550L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
RL455	550L-DIMTR-120	30K 35K 40K 50K	90	WH	RL455-RT-BZ RL455-RT-BK RL455-RT-CH RL455-RT-CP RL455-RT-SN

6" RL655 - LED Round Retrofit Module

6" LED INDIRECT SLIM RETROFIT



700
LUMENS

Available 5 Color Inserts



Example: **RL655-700L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
RL655	700L-DIMTR-120	30K 35K 40K 50K	90	WH	RL655-RT-BZ RL655-RT-BK RL655-RT-CH RL655-RT-CP RL655-RT-SN

4" RL456 - LED Square Retrofit Module

4" LED INDIRECT SLIM RETROFIT



550
LUMENS

Example: **RL456-550L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL456	550L-DIMTR-120	30K 35K 40K 50K	90	WH

6" RL656 - LED Square Retrofit Module

6" LED INDIRECT SLIM RETROFIT



700
LUMENS

Example: **RL656-700L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL656	700L-DIMTR-120	30K 35K 40K 50K	90	WH

4" RL479 - LED Baffle Retrofit Module

4" LED FIXTURE WITH HIGHER BRIGHTNESS



550
LUMENS

Available 5 Color Inserts



Example: **RL479-550L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
RL479	550L-DIMTR-120	30K 35K 40K 50K	90	WH	RL479-RT-BZ RL479-RT-BK RL479-RT-CH RL479-RT-CP RL479-RT-SN


6" RL679 - LED Baffle Retrofit Module

6" LED FIXTURE WITH HIGHER BRIGHTNESS



700
LUMENS

Available 5 Color Inserts




Example: **RL679-700L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
RL679	700L-DIMTR-120	30K 35K 40K 50K	90	WH	RL679-RT-BZ RL679-RT-BK RL679-RT-CH RL679-RT-CP RL679-RT-SN


LED SLIM SERIES OPTIONS

Slim LED Series Mounting Options

**RL-UNV**



Multi-sizes: 3", 4", 6" new construction pre-mounting plate with collar for use with screw-down "C" style remodel housings

**Only fits RL373, not RL375*

**RL373-ROUGHPLATE**

Rough Plate for: RL375, RL373


3" new construction pre-mounting plate with collar for use with screw-down "C" style remodel housings.

**RL-ACC-SLIM-4-ROUGHPLATE**

Rough Plate for:



RL475, RL476, RL479, RL474, RL455, RL456

4" new construction pre-mounting plate with collar for use with screw down "C" style remodel housings.

**RL-ACC-SLIM-5-ROUGHPLATE**

Rough Plate for: RL575



5" new construction pre-mounting plate with collar for use with screw-down "C" style remodel housings.

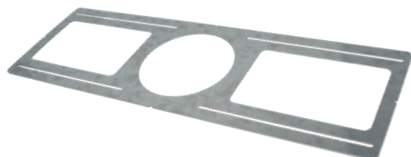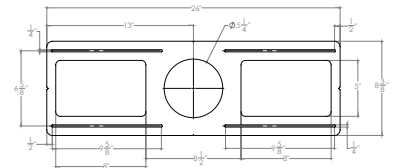**RL-ACC-SLIM-6-ROUGHPLATE**

Rough Plate for:


RL675, RL676, RL575, RL679, RL655, RL565

6" new construction pre-mounting plate with collar for use with screw-down "C" style remodel housings.

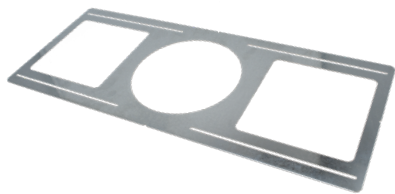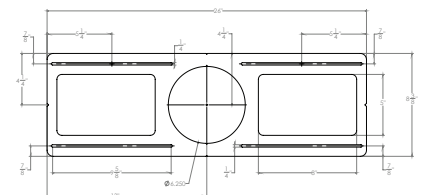**RL-ACC-SLIM-8-ROUGHPLATE**

Rough Plate for: RL875, RL876

8" new construction pre-mounting plate with collar for use with screw-down "C" style remodel housings.

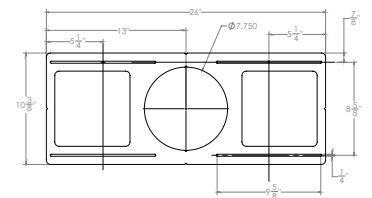

Surface Mount LED Compatible J-Box



3 1/4" Shallow
Pancake Box



3 1/4" Round
(Plastic)



3 1/4" Square
(Plastic)
with Mud Ring



3 1/4" Octagonal
(Metal)



3 1/4" Square
(Metal)
with Mud Ring



Fire Rated J-Box

Note: A 2-1/8" deep octagon junction box is recommended for through circuit wiring applications.

Slim LED Series Connectors

**ACC-1-10F**

10' flexible connector, for use with slim LED fixture

**ACC-1-20F**

20' flexible connector, for use with slim LED fixture

LED SURFACE MOUNT RETROFIT SERIES



6" RL670 - LED Recessed and Surface Mount

Universal Recessed and Surface Mount LED Module



1000
LUMENS



FITS 4", 5" AND 6" HOUSINGS
AND A 4" J-BOX

Example: **RL670-1000L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
RL670	☐ 1000L-DIMTR-120 ☐ 1000L-MVOLT	☐ 27K ☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ WH	☐ RL670-RT-BZ ☐ RL670-RT-SN ☐ RL670-RT-BK

RL670 - Trim Insert Colors



RL670-RT-BZ



RL670-RT-SN



RL670-RT-BK

4" RL470 - LED Recessed and Surface Mount

Universal Recessed and Surface Mount LED Module



650
LUMENS



FITS 4" HOUSINGS
AND A 4" J-BOX

Example: **RL470-650L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH	AVAILABLE INSERTS
RL470	☐ 650L-DIMTR-120	☐ 27K ☐ 30K ☐ 40K	☐ 90	☐ WH	☐ RL470-RT-BZ ☐ RL470-RT-SN ☐ RL470-RT-BK

RL470 - Trim Insert Colors



RL470-RT-BZ



RL470-RT-SN



RL470-RT-BK

6" RL677 - LED Recessed and Surface Mount

Universal Recessed and Surface Mount LED Module



850
LUMENS

1000
LUMENS



FITS 4", 5" AND 6" HOUSINGS
AND A 4" J-BOX

Example: **RL677-850L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL677	☐ 850L-DIMTR-120 ☐ 1000L-DIMTR-120	☐ 27K ☐ 30K ☐ 40K	☐ 90	☐ WH

4" RL477 - LED Recessed and Surface Mount

Universal Recessed and Surface Mount LED Module



600
LUMENS



FITS 4" HOUSINGS
AND A 4" J-BOX

Example: **RL477-600L-DIMTR-120-30K-90-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL477	☐ 600L-DIMTR-120	☐ 30K ☐ 40K	☐ 90	☐ WH

Compatible Slim LED Retrofit

6" Trim Insert Colors



RL675



RL655



RL679



RL6-RT-BZ
(Bronze)



RL6-RT-BK
(Black)



RL6-RT-CH
(Chrome)



RL6-RT-CP
(Copper)



RL6-RT-SN
(Satin Nickel)

Compatible Slim LED Retrofit

4" Trim Insert Colors



RL675



RL455



RL479



RL4-RT-BZ
(Bronze)



RL4-RT-BK
(Black)



RL4-RT-CH
(Chrome)



RL4-RT-CP
(Copper)



RL4-RT-SN
(Satin Nickel)



LED RETROFIT SERIES

6"

RL631 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed White Baffle




Example: RL631-950L-DIMTR-120-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL631	950L-DIMTR-120	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ W-WH

AVAILABLE COLOR INSERTS FOR RL631 - 6" RETROFIT

REFLECTORS

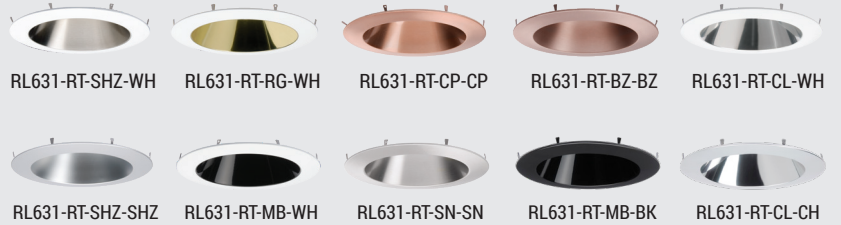

BAFFLES



5"

RL531 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed White Baffle



Example: RL531-950L-DIMTR-120-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL531	950L-DIMTR-120	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ W-WH

AVAILABLE COLOR INSERTS FOR RL531 - 5" RETROFIT

REFLECTORS



BAFFLES



4"

RL431 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed White Baffle



Example: RL431-650L-DIMTR-120-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL431	650L-DIMTR-120	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90	☐ W-WH

AVAILABLE COLOR INSERTS FOR RL431 - 4" RETROFIT

REFLECTORS



BAFFLES



6" LED RETROFIT SERIES

FITS IN MOST 6" REGULAR INCANDESCENT HOUSINGS



WARM DIMMING

6" RL635 - LED Smart Dimming Retrofit

Universal LED SMART Dimming Retrofit Die-cast Aluminum Lensed White Baffle



1000
LUMENS



WARM DIMMING

3000K → 1600K

Example: **RL635-1000L-DIMTR-120-30K-16K-SD-90-W-WH**

Available 15 Color Inserts.
Please check page 9.

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL635	1000L-DIMTR-120	30K-16K-SD	90	W-WH

6" RL629 - LED Smart Dimming Retrofit

Universal LED SMART Dimming Retrofit Die-cast Aluminum Lensed White Reflector



1000
LUMENS



WARM DIMMING

3000K → 1600K

Example: **RL629-1000L-DIMTR-120-30K-16K-SD-90-W-WH**

Available 15 Color Inserts.
Please check page 9.

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL629	1000L-DIMTR-120	30K-16K-SD	90	W-WH

6" RL628 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed White Reflector



950
LUMENS

Example: **RL628-950L-DIMTR-120-30K-90-W-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL628	950L-DIMTR-120	27K 30K 35K	40K 50K	90 W-WH

6" RL627 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed Clear Reflector



950
LUMENS

Example: **RL627-950L-DIMTR-120-30K-90-CL-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL627	950L-DIMTR-120	30K	90	CL-WH

6" RL685 - LED Square Retrofit Module

Universal LED Retrofit Square Downlighting



950
LUMENS

Example: **RL685-950L-DIMTR-120-30K-90-W-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL685	950L-DIMTR-120	27K 30K 40K	90	W-WH

6" RL665 - LED Adjustable Retrofit Module

6" LED Adjustable Retrofit with 24°, 38°, 60° Beam Angle



1100
LUMENS

NEW ADJUSTABLE DESIGN

Example: **RL665-1100L-DIMTR-120-30K-90-NS-W-WH**

CATALOG NO.	LUMENS	CCT	CRI	OPTICS	FINISH
RL665	1100L-DIMTR-120	27K 30K 40K	90	NS - 24° / Narrow MD - 38° / Medium FL - 60° / Flood	WH SN

6" RL664 - LED Adjustable Retrofit Module

6" LED Adjustable Retrofit Module



950
LUMENS

NEW ADJUSTABLE DESIGN

Example: **RL664-950L-DIMTR-120-30K-90-W-WH**

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL664	950L-DIMTR-120	27K 30K 35K 40K	90	WH

FITS IN MOST 5" REGULAR
INCANDESCENT HOUSINGS

5" LED RETROFIT SERIES

5"

RL528 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed White Reflector

950
LUMENS

Example: RL528-950L-DIMTR-120-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL528	950L-DIMTR-120	27K 30K 35K 40K	90	W-WH

5"

RL527 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed Clear Reflector

950
LUMENS

Example: RL527-950L-DIMTR-120-30K-90-CL-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL527	950L-DIMTR-120	30K	90	CL-WH



COMMERCIAL

LED RETROFIT MODULES WITH JUNCTION BOX

6"

RL641 - LED Retrofit Module w/ Junction Box

6" LED Retrofit Baffle Module with Junction Box

1150
LUMENSLED
DIMMABLE
100% to 10%

Example: RL641-1150L-DIM10-MVOLT-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL641	1150L-DIM10-MVOLT	35K 40K	90	W-WH

8"

RL841 - LED Retrofit Module w/ Junction Box

8" LED Retrofit Baffle Module with Junction Box

2500
LUMENSLED
DIMMABLE
100% to 10%

Example: RL841-2500L-DIM10-MVOLT-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL841	2500L-DIM10-MVOLT	35K 40K	90	W-WH



LED RETROFIT LUMEN ADJUSTABLE MODULES

6"

RL642 - LED Adjustable Lumen Output

6" LED Retrofit On-Site Adjustable Lumen
Output Lighting Module w/ Baffle1500
LUMENSOn-site Adjustable
31
LUMEN PACKAGE
750
1100
1500

Example: RL642-1500L-DIMST-MVOLT-30K-90-W-WH

NO HOUSING NEEDED

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL642	1500L-DIMST-MVOLT	30K 40K 50K	90	W-WH

OPTIONS
AND
ADDERS:

- DIMTR-120: Fully dimmable down to 10% of initial light output with standard Triac and Low Voltage dimming option.
- DIM10-MVOLT(120/277): 0-10V dimming, must be ordered with 0-10V dimming housing.
- MANY OTHER OPTIONS ON LUMEN PACKAGE AVAILABLE, PLEASE CONSULT ELITE LIGHTING FOR MORE DETAILS.

8"

RL842 - LED Adjustable Lumen Output

8" LED Retrofit On-Site Adjustable Lumen
Output Lighting Module w/ Baffle2000
LUMENSOn-site Adjustable
31
LUMEN PACKAGE
1000
1500
2000

Example: RL842-2000L-DIMST-MVOLT-30K-90-W-WH

NO HOUSING NEEDED

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL842	2000L-DIMST-MVOLT	30K 40K 50K	90	W-WH

4" LED RETROFIT SERIES

FITS IN MOST 4" REGULAR INCANDESCENT HOUSINGS



4" RL429 - LED Smart Dimming Retrofit

Universal LED SMART Dimming Retrofit Die-cast Aluminum Lensed White Reflector



750
LUMENS



Example: RL429-750L-DIMTR-120-30K-16K-SD-90-W-WH

Available 15 Color Inserts.
Please check page 7.

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL429	750L-DIMTR-120	30K-16K-SD	90	W-WH

4" RL435 - LED Smart Dimming Retrofit

Universal LED SMART Dimming Retrofit Die-cast Aluminum Lensed White Baffle



750
LUMENS



Example: RL435-750L-DIMTR-120-30K-16K-SD-90-W-WH

Available 15 Color Inserts.
Please check page 7.

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL435	750L-DIMTR-120	30K-16K-SD	90	W-WH

4" RL428 - LED Retrofit Module

Universal LED Retrofit Die-cast Aluminum Lensed White Reflector



650
LUMENS

Example: RL428-650L-DIMTR-120-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL428	650L-DIMTR-120	27K 30K 35K 40K 50K	90	W-WH

4" RL485 - LED Retrofit Module

Universal LED Retrofit Square Module



650
LUMENS

Example: RL485-650L-DIMTR-120-30K-90-W-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL485	650L-DIMTR-120	27K 30K 40K	90	W-WH

4" RL461 - LED Adjustable Retrofit Module

LED Round Adjustable Retrofit Module



650
LUMENS



Example: RL461-650L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL461	650L-DIMTR-120	27K 30K 40K	90	WH SN BZ BK

4" RL481 - LED Adjustable Retrofit Module

LED Square Adjustable Retrofit Module



650
LUMENS



Example: RL481-650L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL481	650L-DIMTR-120	27K 30K 40K	90	WH SN

4" RL465 - LED Adjustable Retrofit Module

4" LED Adjustable Retrofit with 24°, 38°, 60° Beam Angle



650
LUMENS



Example: RL465-650L-DIMTR-120-30K-90-NS-W-WH

CATALOG NO.	LUMENS	CCT	CRI	OPTICS	FINISH
RL465	650L-DIMTR-120	27K 30K 40K	90	NS - 24° / Narrow MD - 38° / Medium FL - 60° / Flood	W-WH SN

4" RL403 - LED Adjustable Retrofit Module

4" Eyeball LED Retrofit with 12°, 24°, 38° Beam Angle



600
LUMENS



Example: RL403-600L-DIMTR-120-30K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
RL403	600L-DIMTR-120	30K	90	WH

EASY COLOR SELECTOR

FLIP SWITCH TO GET THE DESIRED
COLOR TEMPERATURE

8" RL875 - LED Round Retrofit Module

8" Round SLIM LED CCT Changeable Fixture

1400
LUMENS

Example: RL875-1400L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL875	☐ 1400L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN

8" RL876 - LED Square Retrofit Module

8" Square SLIM LED CCT Changeable Fixture

1400
LUMENS

Example: RL876-1400L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL876	☐ 1400L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN

6" RL675 - LED Round Retrofit Module

6" Round SLIM LED CCT Changeable Fixture

1000
LUMENS1100
LUMENS

Example: RL675-1100L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL675	☐ 1000L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN
	☐ 1100L-DIMTR-120	☐ 27K/30K/35K/40K/50K		

6" RL676 - LED Square Retrofit Module

6" Square SLIM LED CCT Changeable Fixture

1000
LUMENS1100
LUMENS

Example: RL676-1100L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL676	☐ 1000L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN
	☐ 1100L-DIMTR-120	☐ 27K/30K/35K/40K/50K		

4" RL475 - LED Round Retrofit Module

4" Round SLIM LED CCT Changeable Fixture

700
LUMENS850
LUMENS

Example: RL475-850L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL475	☐ 700L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN
	☐ 850L-DIMTR-120	☐ 27K/30K/35K/40K/50K		

4" RL476 - LED Square Retrofit Module

4" Square SLIM LED CCT Changeable Fixture

700
LUMENS850
LUMENS

Example: RL476-850L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL476	☐ 700L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN
	☐ 850L-DIMTR-120	☐ 27K/30K/35K/40K/50K		

3" RL375 - LED Round Retrofit Module

3" Round SLIM LED CCT Changeable Fixture

500
LUMENS

Example: RL375-500L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL375	☐ 500L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN

3" RL376 - LED Square Retrofit Module

3" Square SLIM LED CCT Changeable Fixture

500
LUMENS

Example: RL376-500L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL376	☐ 500L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ WH ☐ BK ☐ SN

EASY COLOR
SELECTOR
27K/30K/35K/40K/50K

LED SLIM SURFACE MOUNT RETROFIT SERIES

COMPATIBLE WITH MOST J-BOXES,
PLEASE CONSULT FACTORY

11" RL1191 - LED Surface Mount Retrofit Module

11" Round LED CCT Changeable Surface Mount Fixture



1500
LUMENS

Example: RL1191-1500L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL1191	☐ 1500L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

11" RL1195 - LED Surface Mount Retrofit Module

11" Square LED CCT Changeable Surface Mount Fixture



1500
LUMENS

Example: RL1195-1500L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL1195	☐ 1500L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

9" RL991 - LED Surface Mount Retrofit Module

9" Round LED CCT Changeable Surface Mount Fixture



1200
LUMENS

Example: RL991-1200L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL991	☐ 1200L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

9" RL995 - LED Surface Mount Retrofit Module

9" Square LED CCT Changeable Surface Mount Fixture



1200
LUMENS

Example: RL995-1200L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL995	☐ 1200L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

7" RL791 - LED Surface Mount Retrofit Module

7" Round LED CCT Changeable Surface Mount Fixture



900
LUMENS

Example: RL791-900L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL791	☐ 900L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

6" RL695 - LED Surface Mount Retrofit Module

6" Square LED CCT Changeable Surface Mount Fixture



900
LUMENS

Example: RL695-900L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL695	☐ 900L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

5" RL591 - LED Surface Mount Retrofit Module

5" Round LED CCT Changeable Surface Mount Fixture



600
LUMENS

Example: RL591-600L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL591	☐ 600L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

4" RL495 - LED Surface Mount Retrofit Module

4" Square LED CCT Changeable Surface Mount Fixture



600
LUMENS

Example: RL495-600L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL495	☐ 600L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

COMPATIBLE WITH MOST J-BOXES,
PLEASE CONSULT FACTORY

LED SLIM SURFACE MOUNT RETROFIT SERIES

11" RL1192 - LED Surface Mount Retrofit Module

11" Round Slim LED CCT Changeable Surface Mount Fixture

2000
LUMENS

Example: RL1192-2000L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL1192	☐ 2000L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

EASY COLOR
SELECTOR

27K/30K/35K/40K/50K

FLIP SWITCH TO GET THE DESIRED
COLOR TEMPERATURE

9" RL992 - LED Surface Mount Retrofit Module

9" Round Slim LED CCT Changeable Surface Mount Fixture

1500
LUMENS

Example: RL992-1500L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL992	☐ 1500L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

6" REL637 - LED Retrofit Module

Economy Universal LED Retrofit Die-cast Aluminum Lensed White Baffle

950
LUMENSFITS IN MOST 6" REGULAR
INCANDESCENT HOUSINGS

Example: REL637-950L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ REL637	☐ 950L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ W-WH

7" RL792 - LED Surface Mount Retrofit Module

7" Round Slim LED CCT Changeable Surface Mount Fixture

1000
LUMENS

Example: RL792-1000L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL792	☐ 1000L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

5" REL537 - LED Retrofit Module

Economy Universal LED Retrofit Die-cast Aluminum Lensed White Baffle

950
LUMENSFITS IN MOST 5" REGULAR
INCANDESCENT HOUSINGS

Example: REL537-950L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ REL537	☐ 950L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ W-WH

5" RL592 - LED Surface Mount Retrofit Module

5" Round Slim LED CCT Changeable Surface Mount Fixture

950
LUMENS

Example: RL592-950L-DIMTR-120-30K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ RL592	☐ 950L-DIMTR-120	☐ 30K/40K/50K	☐ 90	☐ WH ☐ BK ☐ BN

4" REL437 - LED Retrofit Module

Economy Universal LED Retrofit Die-cast Aluminum Lensed White Baffle


700
LUMENSFITS IN MOST 4" REGULAR
INCANDESCENT HOUSINGS

Example: REL437-700L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

CATALOG NO.	LUMENS	CCT	CRI	FINISH
☐ REL437	☐ 700L-DIMTR-120	☐ 27K/30K/35K/40K/50K	☐ 90	☐ W-WH

LED HOUSING FOR RL SERIES

6"

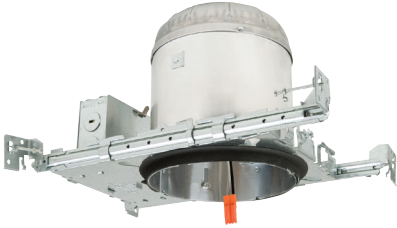NEW CONSTRUCTION DEDICATED
LED SOCKET HOUSINGIC
RATED**LD6IC-AT-DIMTR-120**


6" New Construction IC Housing for Use with Triac and Low Voltage Electronic Dimming RL600 Series LED Module Lighting Components

6"

REMODEL DEDICATED LED SOCKET
HOUSINGIC
RATED**LD6RIC-AT-DIMTR-120**

6" Remodel IC Housing for Use with Triac and Low Voltage Electronic Dimming RL600 Series LED Module Lighting Components

5"

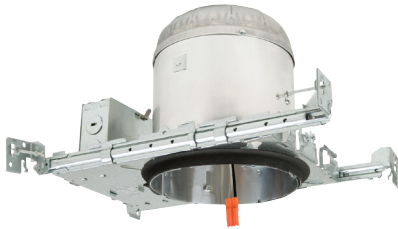NEW CONSTRUCTION DEDICATED
LED SOCKET HOUSINGIC
RATED**LD5IC-AT-DIMTR-120**

5" New Construction IC Housing for Use with Triac and Low Voltage Electronic Dimming RL500 Series LED Module Lighting Components

5"

REMODEL DEDICATED LED SOCKET
HOUSINGIC
RATED**LD5RIC-AT-DIMTR-120**

5" Remodel IC Housing for Use with Triac and Low Voltage Electronic Dimming RL500 Series LED Module Lighting Components

4"

NEW CONSTRUCTION DEDICATED
LED SOCKET HOUSINGIC
RATED**LD4IC-AT-DIMTR-120**

4" New Construction IC Housing for Use with Triac and Low Voltage Electronic Dimming RL400 Series LED Module Lighting Components

4"

REMODEL DEDICATED LED SOCKET
HOUSINGIC
RATED**LD4RIC-AT-DIMTR-120**

4" Remodel IC Housing for Use with Triac and Low Voltage Electronic Dimming RL400 Series LED Module Lighting Components

**OPTIONS
AND
ADDERS:**

- DIMTR-120: Fully dimmable down to 10% of initial light output with standard Triac and Low Voltage dimming option.
- DIM10-MVOLT(120/277): 0-10V dimming, must be ordered with 0-10V dimming housing.
- MANY OTHER OPTIONS ON LUMEN PACKAGE AVAILABLE, PLEASE CONSULT ELITE LIGHTING FOR MORE DETAILS.



LED NEW CONSTRUCTION HOUSING



6"

B6IC-LED

6" NEW CONSTRUCTION IC LED HOUSING

Example: **B6IC-LED-900L-DIMTR-120-30K-SP-90-EMG**

CATALOG NO.	LUMENS	DIMMING	VOLTAGE	CCT	OPTICS	CRI	EMERGENCY
☐ B6IC-LED	☐ 650L ☐ 900L	☐ DIM10 ☐ DIMTR ☐ LUTRON HI-LUME	☐ 120 ☐ 277	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ 3MD	☐ 90	☐ EMG

6"

6" OPTICS



☐ L631

Phenolic Stepped Baffle

AVAILABLE COLOR COMBINATIONS:

W-BK, W-WH, W-CH, W-PB,
W-SN, W-CP, W-BZ

O. D.: 7-3/4"



☐ L601

Metal Albalite Lens

AVAILABLE COLOR COMBINATIONS:

BK, WH, CH, PB, SN, CP, BZ

O. D.: 7-3/4"



☐ L607

Reflector

AVAILABLE COLOR COMBINATIONS:
W-BK, W-WH, W-CH, W-PB, W-SN, W-CP, W-BZ,
CL-BK, CL-WH, CL-CH, CL-PB, CL-SN, CL-CP, CL-BZ

O. D.: 7-3/4"



5"

B5IC-LED

5" NEW CONSTRUCTION IC LED HOUSING

Example: **B5IC-LED-900L-DIMTR-120-30K-SP-90-EMG**

CATALOG NO.	LUMENS	DIMMING	VOLTAGE	CCT	OPTICS	CRI	EMERGENCY
☐ B5IC-LED	☐ 650L ☐ 900L	☐ DIM10 ☐ DIMTR ☐ LUTRON HI-LUME	☐ 120 ☐ 277	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ FL ☐ SP ☐ 3MD	☐ 90	☐ EMG

5"

5" OPTICS



☐ L531

Phenolic Stepped Baffle

AVAILABLE COLOR COMBINATIONS:

W-BK, W-WH, W-CH, W-PB,
W-SN, W-CP, W-BZ

O. D.: 7-3/4"



☐ L501

Metal Albalite Lens

AVAILABLE COLOR COMBINATIONS:

BK, WH, CH, PB, SN, CP, BZ

O. D.: 7-3/4"



☐ L507


Reflector

AVAILABLE COLOR COMBINATIONS:
W-BK, W-WH, W-CH, W-PB, W-SN, W-CP, W-BZ,
CL-BK, CL-WH, CL-CH, CL-PB, CL-SN, CL-CP, CL-BZ

O. D.: 7-3/4"

6" EZ SERIES INCANDESCENT HOUSING WITH LOOSE SOCKET & TRIMS

1

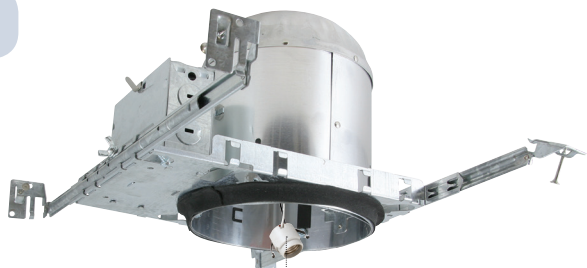

LOOSE SOCKET

**EZ6IC-AT**

6" Universal IC Housing w/ Loose Socket and Quick Connectors, Bar Hangers are supplied with 90° Pivoting Mounting Plate and Double Headed Nail

Designed for all AF series trims, eyeballs, gimbals, and adjustables

6" ALL-FIT TRIMS

**AF637W-WH**

Socket Supporting R30/PAR30
Self Flange Air-Shut Baffle

HOUSING COMPATIBILITY:

1 2 3 4 5

**AF637P-WH**

Socket Supporting R30/PAR30
Self Flange Air-Shut Baffle

HOUSING COMPATIBILITY:

1 2 3 4 5

**AF633W-WH**

Socket Supporting R/PAR30 Open
Trim

HOUSING COMPATIBILITY:

1 2 3 4

**AF640W-WH**

Socket Supporting R40/PAR38 Self
Flange Premium Air-Shut Baffle

HOUSING COMPATIBILITY:

1 2 3 4

**AF640P-WH**

Socket Supporting R40/PAR38 Self
Flange Premium Air-Shut Baffle

HOUSING COMPATIBILITY:

1 2 3 4

**AF605WH**

Socket Supporting Metal Fresnel
Shower Trims

HOUSING COMPATIBILITY:

1 2 3 4

FOR
WET
LOCATION

MAXIMUM

40W A19

**AF632CL-WH**

Socket Supporting R30/PAR30
Self Flange Air-Shut Reflector

HOUSING COMPATIBILITY:

1 2 3 4

**AF632W-WH**

Socket Supporting R30/PAR30 Self
Flange Air-Shut White Reflector

HOUSING COMPATIBILITY:

1 2 3 4

**AF601WH**

Socket Supporting Metal Albalite
Shower Trims

HOUSING COMPATIBILITY:

1 2 3 4

FOR
WET
LOCATION

MAXIMUM

40W A19

HOUSING
COMPATIBILITY
GUIDE

1

EZ6IC-AT
(75W PAR30 /
40W A19)

2

B6IC-AT-W
(75W PAR30, R30,
60W A19, 65W BR30)

3

B6RIC-AT
(75W PAR30, R30,
60W A19, 65W BR30)


4

B26IC-AT-W
(75W PAR30, R30,
60W A19, 65W BR30)

5

B26RIC-AT-W
(75W PAR30, R30,
60W A19, 65W BR30)

6" INCANDESCENT HOUSING WITH SOCKET BRACKET & TRIMS

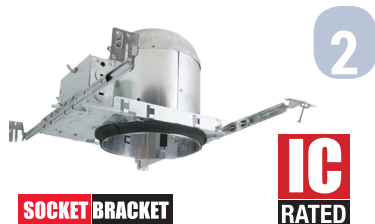


B6IC-AT-W

6" Universal IC Housing with Adjustable Mounting Bracket and Bar Hangers are supplied with 90° Pivoting Mounting Plate and Double Headed Nail



B6RIC-AT

6" Universal IC Remodel Housing

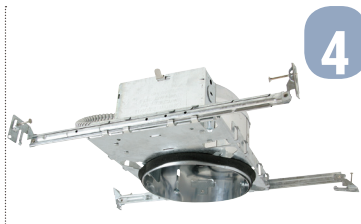

B26IC-AT-W

6" Universal Shallow IC Housing



B26RIC-AT-W

6" Universal Shallow IC Remodel Housing

6" ALL-FIT TRIMS



B631W-WH
R30/PAR30 Premium Phenolic Baffle with Metal Ring

HOUSING COMPATIBILITY:


1 2 3 4 5



B630W-WH
Metal Stepped Baffle R30/PAR30

HOUSING COMPATIBILITY:


1 2 3 4 5



B630P-WH
Metal Stepped Baffle R30/PAR30

HOUSING COMPATIBILITY:

1 2 3 4 5



B603WH
R/PAR 30 Open Trim

HOUSING COMPATIBILITY:

1 2 3 4 5



B607CL-WH
Reflector R/PAR30

HOUSING COMPATIBILITY:

1 2 3 4 5



B608CL-WH
Cone Reflector A-19

HOUSING COMPATIBILITY:

2 3



B611W-WH
PAR30 Baffle Wall Wash

HOUSING COMPATIBILITY:

1 2 3 4 5



B602WH
Eyeball

HOUSING COMPATIBILITY:

1 2 3 4 5



B609W-WH
Regressed Eyeball w/ Baffle

HOUSING COMPATIBILITY:

1 2 3 4 5



B605WH
Metal Fresnel Shower Trims

HOUSING COMPATIBILITY:

1 2 3 4 5



B601WH
Metal Albalite Shower Trims

HOUSING COMPATIBILITY:

1 2 3 4 5

HOUSING
COMPATIBILITY
GUIDE

1 EZ6IC-AT
(75W PAR30 /
40W A19)

2 B6IC-AT-W
(75W PAR30, R30,
60W A19, 65W BR30)

3 B6RIC-AT
(75W PAR30, R30,
60W A19, 65W BR30)

4 B26IC-AT-W
(75W PAR30, R30,
60W A19, 65W BR30)

5 B26RIC-AT-W
(75W PAR30, R30,
60W A19, 65W BR30)

6", 5" & 4" RESIDENTIAL HOUSINGS & TRIMS

6" SLOPE INCANDESCENT HOUSINGS & TRIMS




B36IC-AT
6" Slope IC Housing -
2/12 to 6/12 Pitch (9° to 27°)



B36RIC-AT
6" Slope IC Remodel Housing -
2/12 to 6/12 Pitch (9° to 27°)



B391W-WH
PAR30/R30
Stepped Baffle



B391P-WH
PAR30/R30
Stepped Baffle

5" INCANDESCENT HOUSINGS & TRIMS



B51C-AT-W
5" Universal IC Housing



B51C-AT-W
5" Universal IC Remodel Housing



B530W-WH
Stepped Baffle



B530P-WH
Stepped Baffle



B502WH
Eyeball




B501WH
Metal Albalite Lens



B505WH
Metal Fresnel Lens



4" INCANDESCENT HOUSINGS & TRIMS

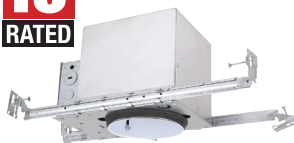

B4IC-AT
4" Miniature IC
Housing



B4-AT
4" Miniature Non-
IC Housing



B4R-AT
4" Miniature Non-IC
Remodel Housing



B401W-WH
Stepped Baffle



B402CL-WH
Reflector



B403WH
Eyeball (30° Tilt)



B406W-WH
Wall Wash with Baffle



B462CL-WH
Semi-Frosted Shower Trim



4" LOW VOLTAGE HOUSINGS & TRIMS




BL4IC-50-M-120-AT
4" Miniature Low Voltage IC Housing
with Magnetic Transformer



BL4-75-120
4" Miniature Low Voltage Non-IC
Housing with Magnetic Transformer




BL4-50-M-120-AT
4" Miniature Low Voltage Non-IC
Housing with Magnetic Transformer



BL4R-50-M-120-AT
4" Miniature Low Voltage Non-IC Remodel
Housing with Magnetic Transformer



B1401W-WH
Stepped Baffle (35° Tilt)



B1401P-WH
Stepped Baffle (35° Tilt)



B1402CL-WH
Reflector (35° Tilt)



B1406WH
Surface Adjus. (90° Tilt, 359° Rot.)



B1411WH
Slot Aperture (35° Tilt, 179° Rot.)



B1404W-WH
Eyeball (47° Tilt)



B1414W-WH
Pinhole with Baffle



B1412W-WH
Fully Adjus. (35° Tilt, 359° Rot.)



B1461WH
Adjustable Gimbal (40° Tilt)



B1462CL-WH
Semi-Frosted Shower Trim



8" & 6" FLUORESCENT HOUSINGS & TRIMS

8" HV8PL 8" Architectural Vertical CFL Downlight



Example: **HV8PL-1X13-E-MVOLT-EMG**

CATALOG NO.	WATTAGE	DIMMING	VOLTAGE	EMERGENCY
HV8PL	☐ 1x13 ☐ 1x18 ☐ 1x26 ☐ 1x32 ☐ 1x42 ☐ 1x57	☐ MARK 7 ☐ MARK 10 ☐ LUTRON HI-LUME	☐ MVOLT ☐ 120V ☐ 277V	☐ EMG-750 ☐ EMG-1300

Additional Trim Color Options:



☐ 8102



☐ 8103



☐ 8104



☐ 8114



☐ 8107



☐ 8105



☐ 8106



☐ 8112



8" Vertical Trim:



☐ 8101-CL-WH
Reflector
O. D.: 9-1/8"

6" HV6PL 6" Architectural Vertical CFL Downlight



Example: **HV6PL-1X13-E-MVOLT-EMG**

CATALOG NO.	WATTAGE	DIMMING	VOLTAGE	EMERGENCY
HV6PL	☐ 1x13 ☐ 1x18 ☐ 1x26 ☐ 1x32 ☐ 1x42	☐ MARK 7 ☐ MARK 10 ☐ LUTRON HI-LUME	☐ MVOLT ☐ 120V ☐ 277V	☐ EMG-750 ☐ EMG-1300

Additional Trim Color Options:



☐ 6102



☐ 6103



☐ 6104



☐ 6114



☐ 6107



☐ 6105



☐ 6106



☐ 6112



6" Vertical Trim:



☐ 6101-CL-WH
Reflector
O. D.: 7-1/2"

8" HH8PL 8" Architectural Horizontal CFL Downlight



Example: **HH8PL-1X13-E-MVOLT-EMG**

CATALOG NO.	WATTAGE		DIMMING	VOLTAGE	EMERGENCY
HH8PL	☐ 1x13	☐ 2x13	☐ MARK 7	☐ MVOLT	☐ EMG-750
	☐ 1x18	☐ 2x18	☐ MARK 10	☐ 120V	☐ EMG-1300
	☐ 1x26	☐ 2x26	☐ LUTRON	☐ 277V	
	☐ 1x32	☐ 2x32	HI-LUME		
	☐ 1x42	☐ 2x42			

Additional Trim Color Options:



☐ 8502



☐ 8503



☐ 8504



☐ 8514



☐ 8507



☐ 8505



☐ 8506



☐ 8512



8" Horizontal Trim:



☐ 8501-CL-WH
Reflector
O. D.: 9-1/8"

6" HH6PL 6" Architectural Horizontal CFL Downlight



Example: **HH6PL-1X13-E-MVOLT-EMG**

CATALOG NO.	WATTAGE		DIMMING	VOLTAGE	EMERGENCY
HH6PL	☐ 1x13	☐ 2x13	☐ MARK 7	☐ MVOLT	☐ EMG-750
	☐ 1x18	☐ 2x18	☐ MARK 10	☐ 120V	☐ EMG-1300
	☐ 1x26	☐ 2x26	☐ LUTRON	☐ 277V	
	☐ 1x32	☐ 2x32	HI-LUME		
	☐ 1x42				

Additional Trim Color Options:



☐ 6502



☐ 6503



☐ 6504



☐ 6514



☐ 6507



☐ 6505



☐ 6506



☐ 6512





6" Horizontal Trim:



☐ 6501-CL-WH
Reflector
O. D.: 7-1/2"

LED SURFACE MOUNT SERIES

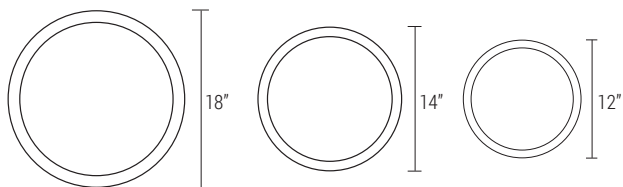



OMSD1-LED

LED Flush Mount Fixture



Example: **OMSD1-LED-12-1400L-120-30K-90-BN**

Catalog/Lumens/Voltage	CCT:	CRI:	Finish:
☐ OMSD1-LED-12-1400L-120	☐ 30K	☐ 90	☐ BN
☐ OMSD1-LED-14-1600L-120	☐ 35K		
☐ OMSD1-LED-18-1800L-120	☐ 40K		
	☐ 50K		

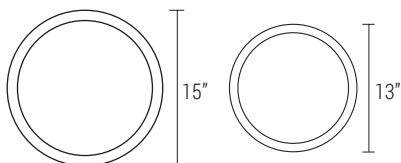


OMSD2-LED

LED Flush Mount Fixture



Example: **OMSD2-LED-13-1000L-120-30K-90-BN**

Catalog/Lumens/Voltage	CCT:	CRI:	Finish:
☐ OMSD2-LED-13-1000L-120	☐ 30K	☐ 90	☐ BN
☐ OMSD2-LED-15-1200L-120	☐ 35K		
	☐ 40K		



OMS-LED-11
A. Diameter = 11-1/2"
B. Height = 3-1/2"
OMS-LED-14
A. Diameter = 14"
B. Height = 3-1/2"
OMS-LED-19
A. Diameter = 19"
B. Height = 4"

OMS-LED

LED Surface Mount Mushroom Fixture

Example: **OMS-LED-11-1200L-120-40K**

Catalog/Lumens/Voltage	CCT:	CRI:
☐ OMS-LED-11-1200L-120	☐ 40K	☐ 90
☐ OMS-LED-14-2600L-120		
☐ OMS-LED-19-3500L-120		

CALCULATED
L70
LIFETIME
60,000 HRS

90+
CRI

LED UNDERCABINET SERIES

EU-LED

- LED Undercabinet
- Polycarbonate w/ UV Radiation Protection



Catalog/Lumens/Voltage	Dimming:	CCT:	Finish:
☐ EU-LED-9-300L	DIMTR-120	☐ 30K	☐ WH
☐ EU-LED-12-450L		☐ 35K	☐ BZ
☐ EU-LED-18-600L		☐ 40K	
☐ EU-LED-24-900L			
☐ EU-LED-34-1300L			
☐ EU-LED-42-1600L			
☐ EU-LED-46-1800L			

☐ RC - Grounded Outlet
(Available accessory)



9"	12"	18"	24"	34"	42"	46"
300L	450L	600L	900L	1300L	1600L	1800L

EUL-LED

- 1-1/2" LED Undercabinet Lighting



☐ EUL-LED-32-750L-DIMTR-120-30K-WH
32" LED Undercabinet

☐ WH ☐ BZ ☐ SN

750 LUMENS 8 WATT 30K CCT



☐ EUL-LED-24-550L-DIMTR-120-30K-WH
24" LED Undercabinet

☐ WH ☐ BZ ☐ SN

550 LUMENS 6 WATT 30K CCT



☐ EUL-LED-16-450L-DIMTR-120-30K-WH
16" LED Undercabinet

☐ WH ☐ BZ ☐ SN

450 LUMENS 4 WATT 30K CCT



☐ EUL-LED-8-300L-DIMTR-120-30K-WH
8" LED Undercabinet



☐ WH ☐ BZ ☐ SN

300 LUMENS 2 WATT 30K CCT

ESL-LED

- LED Slim Link Profile / 120V High Performance •

6"	12"	24"	36"	48"
152L	312L	560L	758L	1125L



- Available in 27K, 30K, and 40K CCT.
- Delivered up to 1125 lumens per unit
- Input Voltage 120
- Up to 58 LPW
- CRI: 81+
- Life rated at 50,000 hours
- Dimming compatible
- Engineered to eliminate 'dark zones'
- Built-in circuitry protects against short circuits
- No UV • No IR • No mercury • No lead



Type	Length/Watt/Lumen	Voltage:	CCT:	Included Accessories:
ESL-LED	☐ 6" (3.1 W, 152 LUMENS)	120	☐ 27K ☐ 30K ☐ 40K	 ESL-LED-ACC-1 Mounting Clips ESL-LED-ACC-2 Connector ESL-LED-ACC-6 Power Connector ESL-LED-ACC-5 Connection Box
	☐ 12" (6.1 W, 312 LUMENS)			
	☐ 24" (12 W, 560 LUMENS)			
	☐ 36" (16 W, 758 LUMENS)			
	☐ 48" (24 W, 1125 LUMENS)			

LED PUCK LIGHT SERIES

LED-HU-41-LED-240L-30K-90-WH

3W LED Round Puck Series



LED-HU-41 is a puck light that can be use for recessed or surface mounted applications.

INPUT VOLT.	THD	INPUT POWER	LUMENS
12	<20%	3W(+/-5%)	240

EXAMPLE: LED-HU-41-LED-240L-30K-90-WH

SERIES	LUMENS	CCT	CRI	FINISH	
LED-HU-41	240L	30K	90+	WH-White	BZ-Bronze
		40K		BK-Black	CH-Chrome
				SI-Silver	SN-Satin Nickel

ACCESSORIES:



LED-HU-ACC-1-WH (White)
LED-HU-ACC-1-BK (Black)
6-port adapter for LED-HU-41 and 45



LED-HU-ACC-2-WW (White)
LED-HU-ACC-2-WB (Black)
24" extension wire to adapter in white,
24" extension wire to driver.



LED-HU-45-LED-240L-30K-90-WH

3W LED Square Puck Series



LED-HU-45 is a puck light that can be use for surface mounted applications.

INPUT VOLT.	THD	INPUT POWER	LUMENS
12	<20%	3W(+/-5%)	240

EXAMPLE: LED-HU-45-LED-240L-30K-90-WH

SERIES	LUMENS	CCT	CRI	FINISH	
LED-HU-45	240L	30K	90+	WH-White	BZ-Bronze
		40K		BK-Black	CH-Chrome
				SI-Silver	SN-Satin Nickel

DIMMABLE COMPACT LED DC
12V ELECTRONIC LOW VOLTAGE DRIVERS

NOTE: Hard wire only. Power cable sold separately



PART#	Input(120V)	Output(12V)	Depth	Height	Width
LED-HU-ELV-DIMTR-DC-12-25-120	1@25 Watts	12V	2.1"	0.7"	6"
LED-HU-ELV-DIMTR-DC-12-50-120	1@50 Watts	12V	2.5"	1"	7"
LED-HU-ELV-DIMTR-DC-12-60-120	1@60 Watts	12V	2.3"	1.4"	7"

SURFACE/RECESSED LED PUCK



LED-HU-30-3W-WH-27K

- Aluminum body
- 3W LED warm white
- 180 lumens
- Surface or Recessed mounted

LED-HU-33-3W-WH-27K

- Aluminum body
- 3W LED warm white
- 180 lumens/lamp
- Surface or Recessed mounted
- Includes: 3 fixtures with quick connectors and mounting hardware. One 9W LED driver with 6' cord.

LED DRIVERS The following driver sold separately.

CAT#	Description	Input	Input Current	# of Puck Lights			Wattage Per Puck Light	Expected Lumen Output/Fix	Connector's Qty.
				Minimum	Maximum	Wattage			
LED-HU-30-DR-8W-350	8W/350mA LED Driver	120V	.350mA	1	6	8	1	80LM	6
LED-HU-30-DR-9W-700	9W/700mA LED Driver	120V	.700mA	1	3	9	3	140LM	3
LED-HU-30-DR-12W-700	12W/350mA LED Driver	120V	.350mA	3	3	12	1	80LM	3
LED-HU-30-DR-16W-350	16.8W/350mA LED Driver	120V	.350mA	7	8	16	1	80LM	8
LED-HU-30-DR-24W-700	24W/700mA LED Driver	120V	.700mA	7	7	24	3	140LM	7



LED UNDERCABINET SERIES


LED-HU-22

LED Portable Cabinet Light



SERIES	LUMENS	CCT	CRI	FINISH
LED-HU-22	130L	30K	80+	☐ WH-White ☐ BZ-Bronze ☐ SI-Silver ☐ CH-Chrome

COLORS



130
LUMENS

2
WATT

30K
CCT


LED-HU-22-3

3 LED Portable Cabinet Light



SERIES	LUMENS	CCT	CRI	FINISH
LED-HU-22-3	390L	30K	80+	☐ WH-White ☐ BZ-Bronze ☐ SI-Silver ☐ CH-Chrome

COLORS



390
LUMENS

6
WATT

30K
CCT



HU-03-3-WH
White 3 Light Puck Light Kit



HU-03-3-BK
Black 3 Light Puck Light Kit




HU-03-3-CH
Chrome 3 Light Puck Light Kit




HU-03-3-PB
Gold 3 Light Puck Light Kit

LED ROPE LIGHT



- ☐ **ER-LED-120-150-WW-CL-150**
120V LED Warm White Instant Rope Flexilight Clear
- ☐ **ER-LED-120-150-CW-CL-150**
120V LED Cool White Instant Rope Flexilight Clear

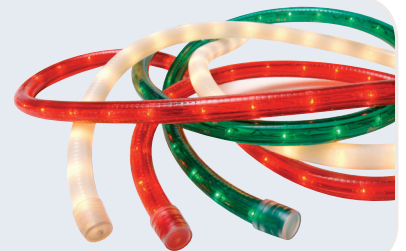

LOW VOLTAGE TRANSFORMERS



ELV-75
75W L. V. Transformer



ELV-105
105W L. V. Transformer



ELV-150
150W L. V. Transformer

LED RECESSED LINEAR LIGHTING SERIES



2' X 4' NV-LED SERIES

2' X 4' LED RECESSED VOLUMETRIC LUMINAIRE




Example: **24-NV-LED-4000L-DIM10-MVOLT-30K**

2 basket

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-NV-LED	☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10 ☐ 8000L-DIM10	☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH ☐ 8000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' NV-LED SERIES

2' X 2' LED RECESSED VOLUMETRIC LUMINAIRE

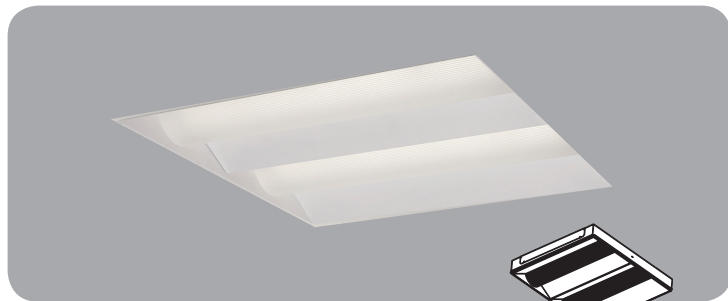


Example: **22-NV-LED-2400L-DIM10-MVOLT-30K**

2 basket

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-NV-LED	☐ 2400L-DIM10 ☐ 3400L-DIM10 ☐ 4000L-DIM10	☐ 2400L-LUTH ☐ 3400L-LUTH ☐ 4000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 4' OVHP-LED SERIES

2X4 LED SHALLOW VOLUMETRIC LUMINAIRE

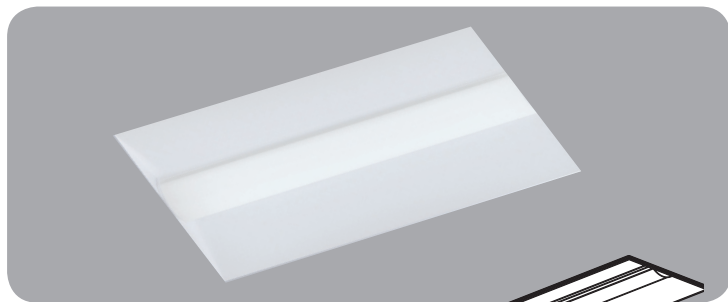


Example: **24-OVHP-LED-4000L-DIM10-MVOLT-30K**

1 basket

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-OVHP-LED	☐ 4000L-DIM10 ☐ 5000L-DIM10	☐ 4000L-LUTH ☐ 5000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' OVHP-LED SERIES

2X2 LED SHALLOW VOLUMETRIC LUMINAIRE

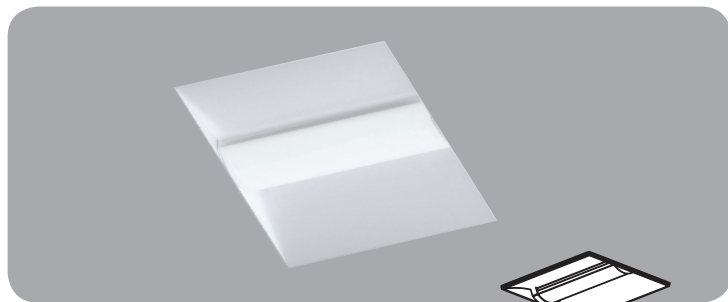

Example: **22-OVHP-LED-4000L-DIM10-MVOLT-30K**

1 basket

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 22-OVHP-LED	☐ 4000L-DIM10	☐ 4000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 4' OT-LED SERIES

2X4 LED RECESSED TROFFER LUMINAIRE




Example: **24-OT-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-OT-LED	☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10 ☐ 8000L-DIM10	☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH ☐ 8000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' OT-LED SERIES

2X2 LED RECESSED TROFFER LUMINAIRE

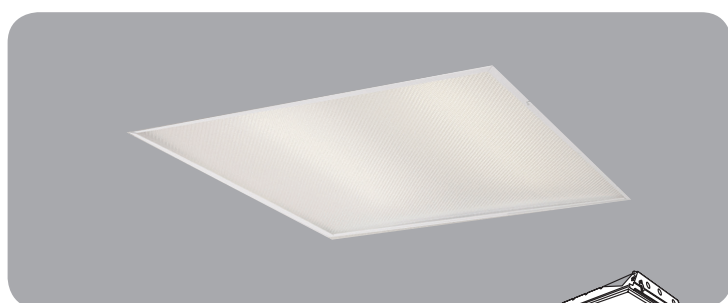

Example: **22-OT-LED-4000L-DIM10-MVOLT-30K**


CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-OT-LED	☐ 4000L-DIM10	☐ 4000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED



LED RECESSED LINEAR LIGHTING SERIES

2' X 4' OD1V-LED SERIES

2' X 4' LED RECESSED VOLUMETRIC TROFFER

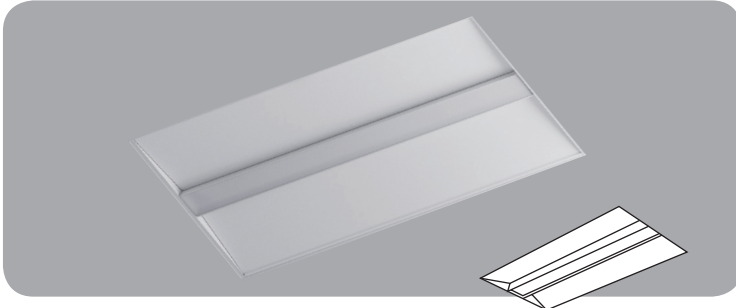


Example: **24-OD1V-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-OD1V-LED	☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10 ☐ 8000L-DIM10 ☐ 10000L-DIM10	☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH ☐ 8000L-LUTH ☐ 10000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' OD1V-LED SERIES

2' X 2' LED RECESSED VOLUMETRIC TROFFER

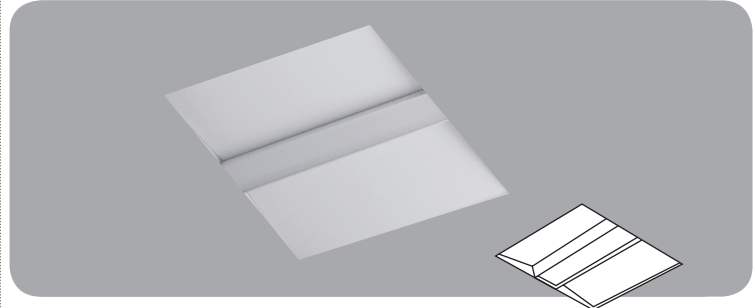


Example: **22-OD1V-LED-2400L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 22-OD1V-LED	☐ 2400L-DIM10 ☐ 3400L-DIM10 ☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10	☐ 2400L-LUTH ☐ 3400L-LUTH ☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 4' ODVH-LED SERIES

2' X 4' LED RECESSED VOLUMETRIC TROFFER

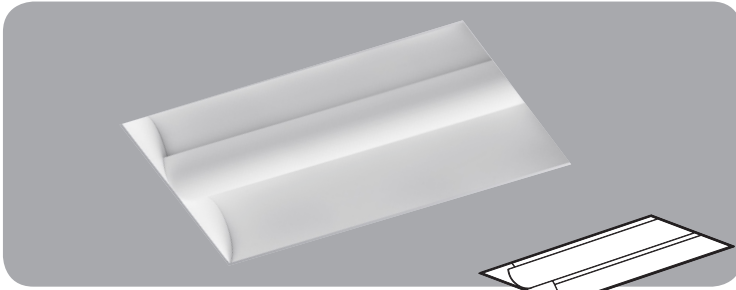


Example: **24-ODVH-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-ODVH-LED	☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10 ☐ 8000L-DIM10 ☐ 9000L-DIM10 ☐ 10000L-DIM10	☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH ☐ 8000L-LUTH ☐ 9000L-LUTH ☐ 10000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' ODVH-LED SERIES

2' X 2' LED RECESSED VOLUMETRIC TROFFER

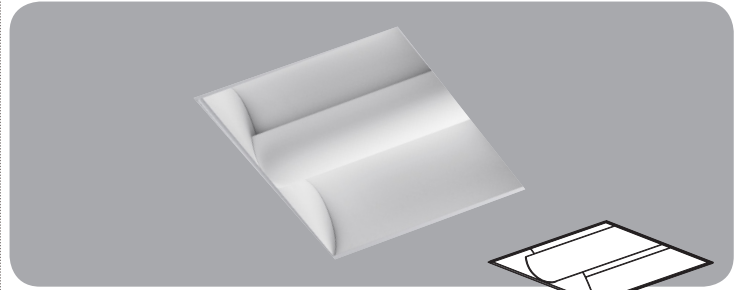


Example: **22-ODVH-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 22-ODVH-LED	☐ 2400L-DIM10 ☐ 3400L-DIM10 ☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10	☐ 2400L-LUTH ☐ 3400L-LUTH ☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 4' LITE-LED-1 SERIES

2X4 ARCHITECTURAL FULLY ILLUMINATED RECESSED LED TROFFER

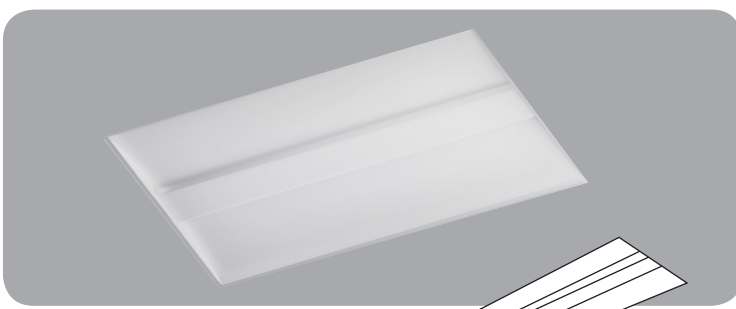


Example: **24-LITE-LED-1-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-LITE-LED-1	☐ 4000L-DIM10 ☐ 6000L-DIM10 ☐ 8000L-DIM10	☐ 4000L-LUTH ☐ 6000L-LUTH ☐ 8000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' LITE-LED-1 SERIES

2X2 ARCHITECTURAL FULLY ILLUMINATED RECESSED LED TROFFER

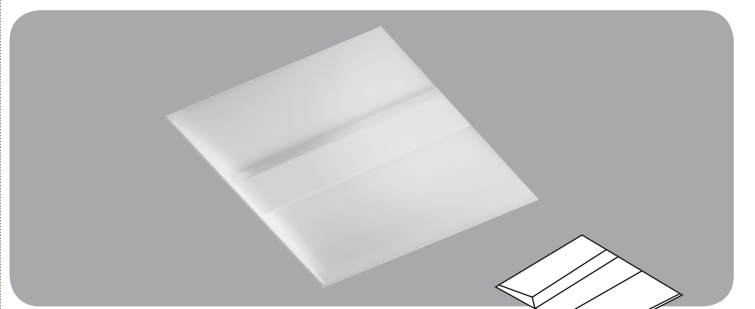

Example: **22-LITE-LED-1-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 22-LITE-LED-1	☐ 2000L-DIM10 ☐ 3000L-DIM10 ☐ 4000L-DIM10	☐ 2000L-LUTH ☐ 3000L-LUTH ☐ 4000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

LED FLAT PANEL SERIES



2' X 4' LED FLAT PANEL SERIES

2' X 4' FPL1-LED LUMINAIRE



Example: **24-FPL1-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-FPL1-LED	☐ 3000L-DIM10 ☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

1' X 4' LED FLAT PANEL SERIES

1' X 4' FPL1-LED LUMINAIRE



Example: **14-FPL1-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 14-FPL1-LED	☐ 2000L-DIM10 ☐ 3000L-DIM10 ☐ 4000L-DIM10 ☐ 5000L-DIM10	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' LED FLAT PANEL SERIES

2' X 2' FPL1-LED LUMINAIRE



Example: **22-FPL1-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 22-FPL1-LED	☐ 2000L-DIM10 ☐ 3000L-DIM10 ☐ 4000L-DIM10 ☐ 5000L-DIM10	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

FLAT PANEL SURFACE MOUNT KIT

1'X4'



14-FPL1-LED-SMK

2'X4'



24-FPL1-LED-SMK

2'X2'



22-FPL1-LED-SMK

UNIVERSAL RECESSED DRYWALL FLANGE KIT

1'X4'



14FK

2'X4'



24FK

2'X2'




22FK



LED RETROFIT KIT SERIES

2' X 4' OVHP-RTK-LED SERIES

2' X 4' LED TROFFER RETROFIT KIT

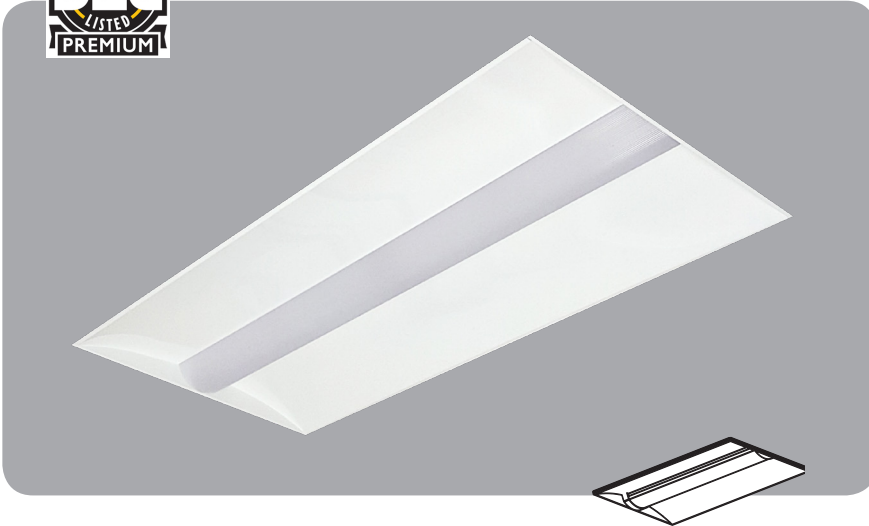


Example: **24-OVHP-RTK-LED-4000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 24-OVHP-RTK-LED	☐ 4000L-DIM10 ☐ 5000L-DIM10 ☐ 6000L-DIM10 ☐ 8000L-DIM10	☐ 4000L-LUTH ☐ 5000L-LUTH ☐ 6000L-LUTH ☐ 8000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

2' X 2' OVHP-RTK-LED SERIES



2' X 2' LED TROFFER RETROFIT KIT

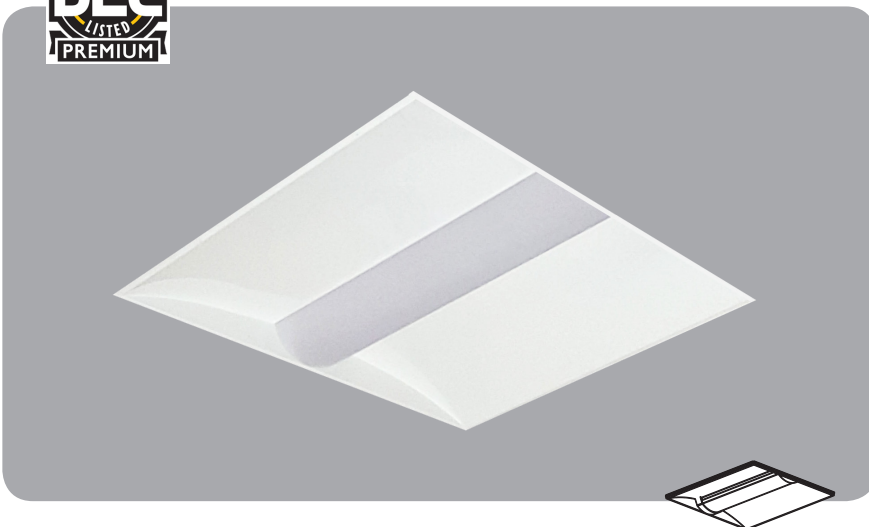


Example: **22-OVHP-RTK-LED-3000L-DIM10-MVOLT-30K**

CATALOG NO.	DIM 10 STANDARD	LUTRON STANDARD	VOLTAGE	CCT	EMERGENCY
☐ 22-OVHP-RTK-LED	☐ 3000L-DIM10	☐ 3000L-LUTH	☐ MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED

EASY INSTALLATION

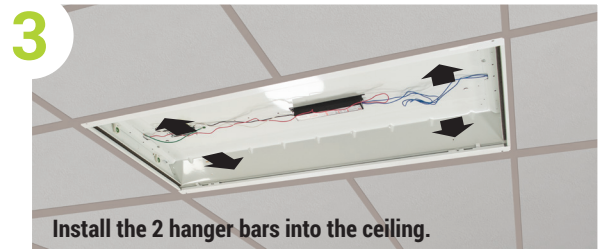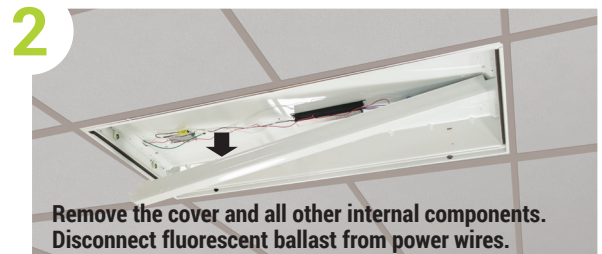

COOL BEAM (CB-LED) SERIES

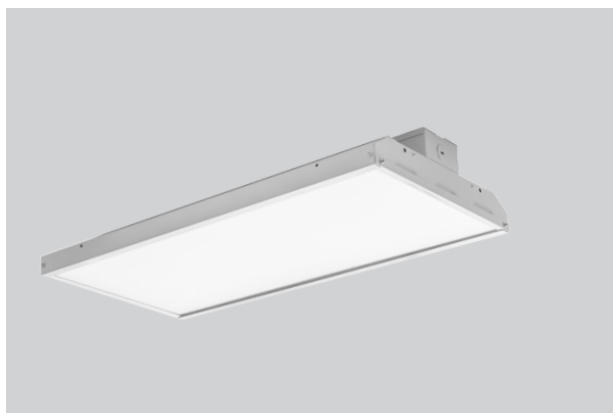

CB2-LED SERIES

LED Cool Beam High Bay (Economy)

Example: **CB2-LED-18000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	OPTICS	EMERGENCY	OPTIONS
CB2-LED	☐ 13000L ☐ 18000L ☐ 26000L ☐ 38000L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ W-Wide	☐ O-EMG-LED	☐ CB2-LED-13000L-WG-WH ☐ CB2-LED-26000L-WG-WH ☐ MS ☐ MSPH

OTHER OPTIONS:



CB2-LED-13000L-WG-WH
WireGuard for 13000L

CB2-LED-26000L-WG-WH
WireGuard for 26000L



MS
Motion Sensor



MSPH
Motion Sensor with photocell



CB3-LED SERIES

LED Cool Beam High Bay (Full Body Specification Grade)

Example: **CB3-LED-18000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	OPTICS	EMERGENCY	OPTIONS
CB3-LED	☐ 18000L ☐ 22500L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ MD-Medium° ☐ AD-Aisle° ☐ GD-General°	☐ O-EMG-LED	☐ CB3-LED-WG ☐ MS ☐ MSPH

OTHER OPTIONS:



CB3-LED-WG
WireGuard



MS
Motion Sensor



MSPH
Motion Sensor with photocell



CB4-LED SERIES

LED Cool Beam High Bay (Full Body Specification Grade)

Example: **CB4-LED-14000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	OPTICS	EMERGENCY	OPTIONS
CB4-LED	☐ 10000L ☐ 12000L ☐ 14000L ☐ 16000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ W-Wide ☐ N-Narrow	☐ O-EMG-LED	☐ CB4-LED-CLDF ☐ CB4-LED-WGDF ☐ MS ☐ MSPH

OTHER OPTIONS:



CB4-LED-WGDF
WireGuard Door Frame



MS
Motion Sensor



MSPH
Motion Sensor with photocell



CB6-LED SERIES

LED Cool Beam High Bay (Full Body Specification Grade)


Example: **CB6-LED-24000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	OPTICS	EMERGENCY	OPTIONS
CB6-LED	☐ 24000L ☐ 28000L ☐ 36000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ W-Wide ☐ N-Narrow	☐ O-EMG-LED	☐ CB6-LED-CLDF ☐ CB6-LED-WGDF ☐ MS ☐ MSPH

OTHER OPTIONS:



CB6-LED-WGDF
WireGuard Door Frame



MS
Motion Sensor



MSPH
Motion Sensor with photocell

LED VAPOR TIGHT, STRIP AND GENERAL LIGHTING SERIES



OW1IP-LED SERIES

LED Vapor Tight Luminaire

Example: 4-OW1IP-LED-18000L-DIM10-MVOLT-40K

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY	OPTIONS
☐ 2-OW1IP-LED	☐ 3000L ☐ 4000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED	☐ WLMS-Wet Location Motion Sensor ☐ MSPH-Motion Sensor w/ photocell
☐ 4-OW1IP-LED	☐ 3000L ☐ 4000L ☐ 5000L ☐ 6000L ☐ 8000L				
☐ 8-OW1IP-LED	☐ 4000L ☐ 6000L ☐ 8000L ☐ 10000L ☐ 14000L ☐ 18000L				




OWS-LED SERIES

IP65 and Wet Location LED Linear Luminaire

Example: 4-OWS-LED-4000L-DIM10-MVOLT-40K

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY	OPTIONS
4-OWS-LED	☐ 4000L ☐ 5000L	☐ DIM10-MVOLT ☐ LUTH-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED	☐ INMS-Internal Motion Sensor ☐ WLMS-Wet Location Motion Sensor ☐ MSPH-Motion Sensor w/ photocell

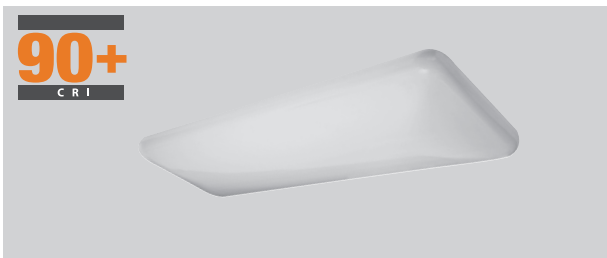

OSC-LED SERIES

4' LED Cloud Luminaire

Example: 4-OSC-LED-4000L-DIM10-MVOLT-40K

CATALOG NO.	LUMENS	DIMMING	CCT	CRI	EMERGENCY
4-OSC-LED	☐ 4000L ☐ 5000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K	☐ 90	☐ 0-EMG-LED



OC1-LED SERIES

LED General Lighting Linear Luminaire


Example: 4-OC1-LED-4000L-DIM10-MVOLT-40K

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY	OPTION
☐ 2-OC1-LED	☐ 2000L ☐ 3000L ☐ 4000L ☐ 5000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED	☐ INMS-Internal Motion Sensor ☐ OCVH-V Hook ☐ OCGSS-Cable Gripper Suspension Kit
☐ 4-OC1-LED	☐ 3000L ☐ 4000L ☐ 5000L ☐ 6000L ☐ 7000L ☐ 8000L ☐ 10000L				
☐ 8-OC1-LED	☐ 6000L ☐ 8000L ☐ 14000L ☐ 20000L				

2-OC1-LED  2'
 4-OC1-LED  4'
 8-OC1-LED  8'



LED STRIP AND GENERAL LIGHTING SERIES

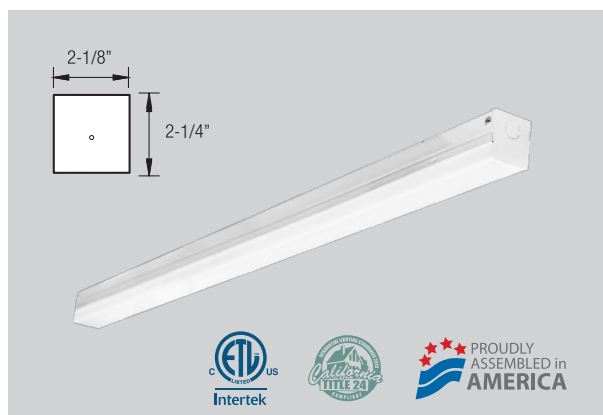

OC4-LED SERIES


LED General Lighting Linear Luminaire

Example: **4-OC4-LED-4000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY	OPTION
☐ 4-OC4-LED	☐ 3000L ☐ 4000L ☐ 5000L ☐ 6000L ☐ 8000L ☐ 9000L ☐ 10000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED	☐ INMS-Internal Motion Sensor ☐ OCVH-V Hook ☐ OCGSS-Cable Gripper Suspension Kit
☐ 8-OC4-LED	☐ 6000L ☐ 8000L ☐ 10000L ☐ 20000L				

4-OC4-LED 4'

8-OC4-LED 8'

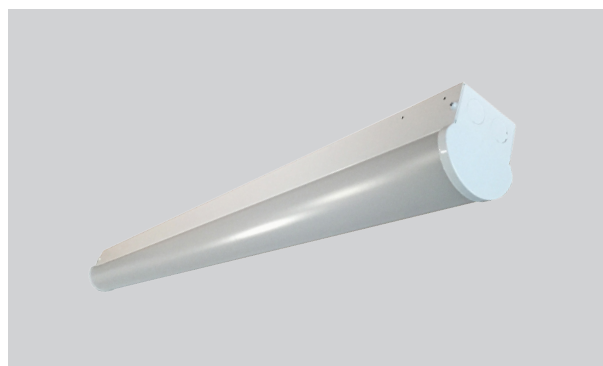

OEC-LED SERIES

LED General Lighting Linear Curve Luminaire

Example: **4-OEC-LED-4000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY	OPTIONS
☐ 4-OEC-LED	☐ 3000L ☐ 4000L	☐ DIM10-MVOLT	☐ 35K ☐ 40K	☐ 0-EMG-LED	☐ OCVH-V Hook ☐ MS-Motion Sensor ☐ OCGSS-Grippler Suspension System ☐ MS-FM105-High Freq. Motion Sensor
☐ 8-OEC-LED	☐ 8000L				

4-OEC-LED 4'

8-OEC-LED 8'



NOW IN STOCK!



READY TO SHIP!

BALLAST

BALLAST-LAMP COMPATIBILITY CHART

Ballast Part #	Max. Lumen Output	LINEAR FLUORESCENT LAMPS						COMPACT FLUORESCENT LAMPS			
		T5 (W)		T5HO (W)		T8 (W) / T8 (U-Bend) / T9 (Circulene)		4-Pin CFL (W)		4-Pin Long CFL (W)	
# of Lamps		1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp	1 Lamp	2 Lamp
BAL-EMG-T8-500	500	-	-	-	-	17-40	-	13-26	-	18-36	-
BAL-EMG-T8-1400	1400	-	-	-	-	17-110	17-40	13-42	13-39	18-55	18-36
BAL-EMG-T8-3000	3000	-	-	-	-	17-215	17-40	-	13-42	18-55	18-36
BAL-EMG-T5-700	700	8, 14	-	-	-	17-40	-	13-39	-	18-36	-
BAL-EMG-T5-1400	1400	-	8-28	39, 54	-	17-125	17-40	13-42	13-39	18-50	18-36
BAL-EMG-T5-3000	3000	-	8-28	-	39, 54	17-125	17-40	-	13-42	18-55	18-50
BAL-EMG-T5HO-1400	1400	-	8-28	39, 54	-	-	17-40	13-42	13-39	-	18-40
BAL-EMG-T5HO-3000	3000	-	8-28	-	39, 54	17-125	17-40	-	13-42	18-55	18-50

LED WRAP AROUND LIGHTING SERIES



4-ORW-LED 4'


DIMENSION: Length: 46" X Width: 9.7" X Depth: 3.4"

ORW-LED SERIES

LED Round Wrap Around (Suspended or Surface Mount)

Example: **4-ORW-LED-5000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY	OPTIONS
☐ 4-ORW-LED	☐ 5000L	☐ DIM10-MVOLT	☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED	☐ MS-Motion Sensor ☐ INMS-Internal Motion Sensor ☐ MSPH-Motion Sensor w/ Photocell ☐ OCGSS-Gripple Suspension System

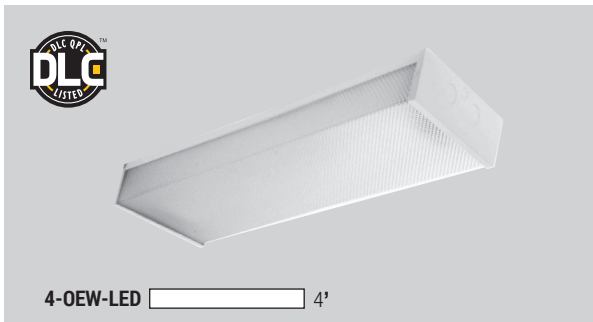

4-OEW-LED 4'

DIMENSION: Length: 48" X Width: 6.125" X Depth: 2.5"

OEW-LED SERIES

LED Economy Wrap Around (Surface Mount)

Example: **4-OEW-LED-5000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY
☐ 4-OEW-LED	☐ 5000L	☐ DIM10-MVOLT	☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED



2-OIW-LED 2'

4-OIW-LED 4'

8-OIW-LED 8'

DIMENSION: Length: 24" X Width: 9.1875" X Depth: 3.0625"
Length: 48" X Width: 9.1875" X Depth: 3.0625"
Length: 96" X Width: 9.1875" X Depth: 3.0625"

OIW-LED SERIES

LED Industrial Wrap Around (Surface Mount)

Example: **4-OIW-LED-4000L-DIM10-MVOLT-40K**

CATALOG NO.	LUMENS	DIMMING	CCT	EMERGENCY
☐ 2-OIW-LED	☐ 2400L ☐ 3400L	☐ DIM10-MVOLT ☐ LUTH-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 0-EMG-LED
☐ 4-OIW-LED	☐ 2400L ☐ 3400L ☐ 4000L ☐ 5000L ☐ 6000L ☐ 7000L			
☐ 8-OIW-LED	☐ 5000L ☐ 7000L ☐ 8000L ☐ 10000L ☐ 12000L ☐ 14000L			



INDUSTRIAL HIGH BAYS SERIES

4-LAMP HIGH BAY SERIES (T5/T8)



CB4 SERIES

CB-4-54-T5HO

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast

CB-4-32-T8

Full Body 4-Lamp 32W T8 High Bay 120/277

CB-4-54-T5HO-GL41K

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast & 841 Lamps

CB-4-32-T8-GL41K

Full Body 4-Lamp 32W T8 High Bay 120/277 & 741 Lamps

6-LAMP HIGH BAY SERIES (T5/T8)



CB6 SERIES

CB-6-54-T5HO

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast

CB-6-32-T8

Full Body 4-Lamp 32W T8 High Bay 120/277

CB-6-54-T5HO-GL41K

Full Body 4-Lamp 54W T5HO High Bay 120/277 & Advance Cool Running Ballast & 841 Lamps

CB-6-32-T8-GL41K

Full Body 4-Lamp 32W T8 High Bay 120/277 & 741 Lamps

ACCESSORIES FOR HIGH BAY

ACCESSORIES FOR HIGH BAY



CB-4-WG-C2

4-Lamp Cool Beam Wire Guard - Screw Down



CB-6-WG-C2

6-Lamp Cool Beam Wire Guard - Screw Down



CB4-HG

4-Lamp Cool Beam Wire Guard - Hinged w/ Door Frame



CB6-HG

6-Lamp Cool Beam Wire Guard - Hinged w/ Door Frame



CB-4-CL-C2

4-Lamp Cool Beam Clear Lens & Door



CB-6-CL-C2

6-Lamp Cool Beam Clear Lens & Door



CB-4-PL-C2


4-Lamp Cool Beam Prismatic Lens & Door



CB-6-PL-C2

6-Lamp Cool Beam Prismatic Lens & Door

ACCESSORIES FOR HIGH BAY



CB-CHAIN

4 Hooks, 10' Chain



GSS

Set of 10' Gripple Aircraft Cable



PCSB

Straight Blade 120V Plug



PCTL-120

120V 3 - Wire NEMA 5-15 Amp Plug



PCTL-277

277V 3 - Wire NEMA 5-15 Amp Plug



MH

Mounting Hub



MS

Motion Sensor



EPS

Electronic Program Start Ballast for T8/ per Ballast

VAPOR TIGHT, STRIP, SURFACE MOUNT SERIES

VAPOR TIGHT SERIES

COMMERCIAL



VAPOR TIGHT SERIES

4-OWVS-2-32-T8-E-MVOLT
2 Lamp 32W T8 4' Vapor Tight

4-OWVS-2-54-T5HO-E-MVOLT
2 Lamp 54W T5HO 4' Vapor Tight

STRIP LIGHTING



1 LAMP STRIP SERIES

4-OC-1-32-T8-E-MVOLT
1 Lamp 4' 32W Open Strip



2 LAMP STRIP SERIES

4-OC-2-32-T8-E-MVOLT
2 Lamp 4' 32W Open Strip

8-OC-4-32-T8-E-MVOLT
4 Lamp 8' 32W Tandem Open Strip

4-OC-WG
4' Wire Guard

SURFACE MOUNT WRAP AROUND



ECONOMY WRAP AROUND

2-OEW-2-17-T8-120
2' 2 Lamp 7" 17W -120V

4-OEW-2-32-T8-120
4' 2 Lamp 7" 32W -120V



INDUSTRIAL WRAP AROUND

4-OIW-2-32-T8-MVOLT
4' 2 Lamp 9" 32W-MVOLT

4-OIW-3-32-T8-MVOLT
4' 3 Lamp 9" 32W-MVOLT

4-OIW-4-32-T8-MVOLT
4' 4 Lamp 9" 32W-MVOLT

SURFACE MOUNT CLOUD



4' CLOUD SERIES

4-OSC-2-32-T8-E-MVOLT
2 Lamp 32W 4' Cloud

4-OSC-4-32-T8-E-MVOLT
4 Lamp 32W 4' Cloud

MUSHROOM SERIES



MUSHROOM SERIES

OMS-11-2X13W-120
11" 2 Lamp 2x13W

OMS-11-22W-120
11" 1 Lamp 22W

MUSHROOM SERIES

OMS-14-32W-120
14" 1 Lamp 32W

OMS-14-54W-120
14" 1 Lamp 54W

MUSHROOM SERIES

OMS-19-72W-120
19" 1 Lamp 72W

ROUND DRUM SERIES



11" ROUND DRUM SERIES

ORS-11-2X13W-120
11" 2 Lamp 2x13W

ORS-11-22W-120
11" 1 Lamp 22W

14" ROUND DRUM SERIES

ORS-14-32W-120
14" 1 Lamp 32W

ORS-14-54W-120
14" 1 Lamp 54W

19" ROUND DRUM SERIES

ORS-19-72W-120
19" 1 Lamp 72W

LED OUTDOOR SERIES



DIMENSION: Length: 18" X Width: 9.25" X Depth: 7.125"

OWS-FC-202-LED

LED Half Moon Wall Sconce with Downlight Series

Example: **OWS-FC-202-LED-5000L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWS-FC-202-LED	☐ 5000L	☐ DIM10-MVOLT	☐ 40K	☐ BZ ☐ WH ☐ SI	☐ PHC-Photocell

* Custom RAL, consult factory

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



DIMENSION: Length: 18" X Width: 9.25" X Depth: 7.125"

OWS-FC-202-LED-UD

LED Half Moon Wall Sconce with Up and Downlight Series

Example: **OWS-FC-202-LED-UD-5000L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWS-FC-202-LED-UD	☐ 5000L	☐ DIM10-MVOLT	☐ 40K	☐ BZ ☐ WH ☐ SI	☐ PHC-Photocell

* Custom RAL, consult factory

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



DIMENSION: Length: 18" X Width: 9" X Depth: 9"

OWS-FC-303-LED

LED Round Full Cut-Off Wall Sconce Series

Example: **OWS-FC-303-LED-6000L-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWS-FC-303-LED	☐ 6000L	☐ DIM10-MVOLT	☐ 40K	☐ BZ ☐ WH ☐ SI	☐ PHC-Photocell ☐ MS-Motion Sensor

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



LED OUTDOOR SERIES

OWP-FC-201-LED

LED Medium Full Cut-Off Wall Pack Series


Example: **OWP-FC-201-LED-6000L-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-201-LED	☐ 4500L ☐ 6000L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ O-EMG-LED	☐ PHC-Photocell ☐ FSP-305RC-Watt-stopper Motion Sensor

* For more lumen package option, consult factory

* Available with 347V

* For more CCT option, consult factory



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

Generic motion sensor is standard, other options available

OWP-FC-211-LED

LED Medium Full Cut-Off Wall Pack Series


Example: **OWP-FC-211-LED-7500L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-211-LED	☐ 3400L ☐ 5000L ☐ 7500L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ O-EMG-LED	☐ PHC-Photocell

* For more lumen package option, consult factory

* Available with 347V

* For more CCT option, consult factory



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

Generic motion sensor is standard, other options available

OWP-FC-311-LED

LED Large Full Cut-Off Wall Pack Series


Example: **OWP-FC-311-LED-14500L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-311-LED	☐ 10000L ☐ 14500L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ O-EMG-LED	☐ PHC-Photocell

* For more lumen package option, consult factory

* Available with 347V

* For more CCT option, consult factory




** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

LED OUTDOOR SERIES



OWP-NC-201-LED

LED Medium No Cut-Off Wall Pack Series



Example: **OWP-NC-201-LED-6000L-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-NC-201-LED	☐ 4500L ☐ 6000L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ 0-EMG-LED	☐ PHC-Photocell

* Consult factory for more option


** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

Generic motion sensor is standard, other options available



OWP-NC-211-LED

LED Medium No Cut-Off Wall Pack Series



Example: **OWP-NC-211-LED-8000L-DIM10-MVOLT-40K-BZ**


CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-NC-211-LED	☐ 5000L ☐ 8000L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ 0-EMG-LED	☐ PHC-Photocell

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



OWP-NC-301-LED

LED Large No Cut-Off Wall Pack Series



Example: **OWP-NC-301-LED-9000L-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-NC-301-LED	☐ 9000L ☐ 12000L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ 0-EMG-LED	☐ PHC-Photocell

* Consult factory for more option


** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

Generic motion sensor is standard, other options available



OWP-NC-311-LED

LED Large No Cut-Off Wall Pack Series



Example: **OWP-NC-311-LED-10000L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-NC-311-LED	☐ 10000L ☐ 15500L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ 0-EMG-LED	☐ PHC-Photocell

* Consult factory for more option

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



LED OUTDOOR SERIES

OWP-FC-103-LED

LED Die-Cast Aluminum Slim Full Cut-Off Wall Pack Series

Example: **OWP-FC-103-LED-2500L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWP-FC-103-LED	☐ 2500L	☐ DIM10-MVOLT ☐ DIMTR-120	☐ 40K ☐ 50K	☐ BZ	☐ PHC-Photocell

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

OWP-SL-102-LED

LED Die-Cast Slimline Wall Pack Series

Example: **OWP-SL-102-LED-700L-MVOLT-40K-BK**

CATALOG NO.	LUMENS	VOLTAGE	CCT	FINISH
OWP-SL-102-LED	☐ 700L	☐ MVOLT	☐ 30K ☐ 40K	☐ BZ

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

OWP-SL-101-LED

LED Die-Cast Slimline Wall Pack Series

Example: **OWP-SL-101-LED-2700L-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	VOLTAGE	CCT	FINISH
OWP-SL-101-LED	☐ 2700L	☐ MVOLT	☐ 30K ☐ 40K ☐ 50K	☐ BZ ☐ WH

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

OFL-R-101-LED

LED Small Round Floodlight Series

Example: **OFL-R-101-LED-3300L-MVOLT-NFL-40K-BZ**

CATALOG NO.	LUMENS	VOLTAGE	BEAM ANGLE	CCT	FINISH
OFL-R-101-LED	☐ 3300L	☐ MVOLT	☐ NFL - Narrow Flood ☐ SFL - Spot Flood	☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

LED OUTDOOR SERIES




OFL-101-LED

LED Architectural Small Floodlight Series

Example: **OFL-101-LED-5000L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-101-LED	☐ 2000L ☐ 3000L ☐ 4000L ☐ 5000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.




OFL-201-LED

LED Architectural Medium Floodlight Series

Example: **OFL-201-LED-10000L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-201-LED	☐ 6000L ☐ 8000L ☐ 10000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.




OFL-301-LED

LED Architectural Large Floodlight Series

Example: **OFL-301-LED-18000L-DIM10-MVOLT-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-301-LED	☐ 12000L ☐ 15000L ☐ 18000L	☐ DIM10-MVOLT	☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.




OFL-SL SERIES

LED Mini Slimline Floodlight Series

Example: **OFL-SL-302-LED-4500L-MVOLT-40K-BZ**

SERIES	VOLTAGE	CCT	FINISH
☐ OFL-SL-102-LED-1500L ☐ OFL-SL-202-LED-3000L ☐ OFL-SL-302-LED-4500L	☐ MVOLT	☐ 30K ☐ 40K ☐ 50K	☐ BZ

SERIES	A	B	C	D
OFL-SL-102-LED	4.72"	2.95"	1.27"	1.64"
OFL-SL-202-LED	7.08"	4.42"	1.61"	1.64"
OFL-SL-302-LED	8.26"	5.15"	2"	1.64"





LED OUTDOOR SERIES

OFL-SL-106-LED


LED Square Slimline Floodlight Series

Example: **OFL-SL-106-LED-1000L-120-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-SL-106-LED	☐ 1000L	☐ 120	☐ 30K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



SERIES	A	B	C	D
OFL-SL-106-LED	6.45"	5.3"	3.5"	.8"

OFL-SL-206-LED


LED Square Slimline Floodlight Series

Example: **OFL-SL-206-LED-2000L-120-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-SL-206-LED	☐ 2000L	☐ 120	☐ 30K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



SERIES	A	B	C	D
OFL-SL-206-LED	8"	7.4"	5"	.9"

OFL-SL-306-LED


LED Square Slimline Floodlight Series

Example: **OFL-SL-306-LED-3000L-120-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-SL-306-LED	☐ 3000L	☐ MVOLT	☐ 30K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



SERIES	A	B	C	D
OFL-SL-306-LED	9.3"	9.4"	6.5"	1.1"

OFL-SL-406-LED


LED Square Slimline Floodlight Series

Example: **OFL-SL-406-LED-5000L-120-40K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH
OFL-SL-406-LED	☐ 5000L	☐ MVOLT	☐ 30K ☐ 40K ☐ 50K	☐ BZ



** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



SERIES	A	B	C	D
OFL-SL-406-LED	11.1"	11.8"	8.25"	1.4"

LED OUTDOOR SERIES



OVR-101-LED

LED Small Square Canopy Series

Example: **OVR-101-LED-6000L-DIM10-MVOLT-40K-O-EMG-LED-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	EMERGENCY	ACCESSORIES
OVR-101-LED	☐ 4000L ☐ 6000L	☐ DIM10-MVOLT	☐ 40K ☐ 50K	☐ BZ ☐ WH	☐ O-EMG-LED	☐ MS-Motion Sensor

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



OVR-102-LED

LED Small Round Canopy Series

Example: **OVR-102-LED-6000L-DIM10-MVOLT-40K-O-EMG-LED-BZ**

CATALOG NO.	LUMENS	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OVR-102-LED	☐ 3500L ☐ 4900L ☐ 6000L	☐ DIM10	☐ MVOLT ☐ 347V	☐ 40K ☐ 50K	☐ BZ ☐ WH	☐ O-EMG-LED	☐ MS-Motion Sensor

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



OVR-202-LED

LED Medium Round Canopy Series

Example: **OVR-202-LED-5000L-DIM10-MVOLT-40K-O-EMG-LED-BZ**

CATALOG NO.	LUMENS	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OVR-202-LED	☐ 5000L ☐ 7000L	☐ DIM10	☐ MVOLT ☐ 347V	☐ 40K ☐ 50K	☐ BZ ☐ WH	☐ O-EMG-LED	☐ MS-Motion Sensor

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



OVR-201-LED

LED Medium Vandal Resistant Canopy Series


Example: **OVR-201-LED-4000L-MVOLT-40K-BZ-PHC**

CATALOG NO.	LUMENS	VOLTAGE	CCT	FINISH	ACCESSORIES
OVR-201-LED	☐ 2000L ☐ 4000L	☐ MVOLT	☐ 40K ☐ 50K	☐ BZ	☐ PHC-Photocell

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



LED OUTDOOR SERIES

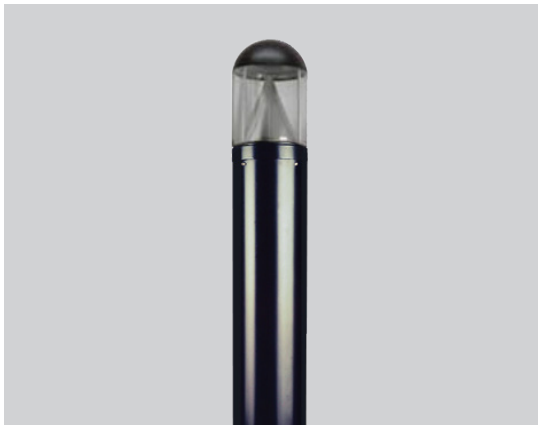


OBO-105-LED

LED Bollard Lighting Series

Example: **OBO-105-LED-2000L-DIM10-MVOLT-40K-BK**

CATALOG NO.	LUMENS	DIMMING	VOLTAGE	CCT	FINISH
OBO-105-LED	☐ 2000L	☐ DIM10 ☐ LUTH	☐ MVOLT	☐ 30K ☐ 40K ☐ 50K	☐ BK

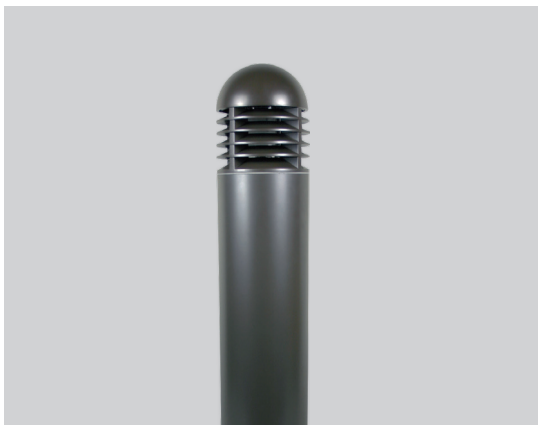

OBO-103-LED

LED Louvered Vandal Resistant Bollard Lighting Series

Example: **OBO-103-LED-2000L-DIM10-MVOLT-40K-BK**

CATALOG NO.	LUMENS	DIMMING	VOLTAGE	CCT	FINISH
OBO-103-LED	☐ 2000L	☐ DIM10 ☐ LUTH	☐ MVOLT	☐ 30K ☐ 40K ☐ 50K	☐ BK



LED OUTDOOR SERIES



OVT-LED-WM

LED Vapor Tight For Wet Location Wall Mount Series

Example: **OVT-LED-1500L-MVOLT-40K-GR-WM**

CATALOG NO.	LUMENS	VOLTAGE	CCT	FINISH	MOUNTING
OVT-LED	☐ 1500L	☐ MVOLT	☐ 40K	☐ GR-Gray *For more color options, consult factory	☐ WM-Wall Mount



OVT-LED-CM

LED Vapor Tight For Wet Location Ceiling Mount Series

Example: **OVT-LED-1500L-MVOLT-40K-GR-CM**

CATALOG NO.	LUMENS	VOLTAGE	CCT	FINISH	MOUNTING
OVT-LED	☐ 1500L	☐ MVOLT	☐ 40K	☐ GR-Gray *For more color options, consult factory	☐ CM-Ceiling Mount



OMSSL-LED-101

Motion Activated LED Security Light

Example: **OMSSL-LED-101-1800L-120-30K-150-WH**

CATALOG NO.	LUMENS	VOLTAGE	CCT	DETECTION RANGE	FINISH
OMSSL-LED-101	☐ 1800L	☐ 120	☐ 30K ☐ 40K ☐ 50K	☐ 150-150° angle ☐ 180-180° angle	☐ WH ☐ BZ

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



OMSSL-LED-102

Motion Activated LED Security Light

Example: **OMSSL-LED-102-2700L-120-30K-150-WH**

CATALOG NO.	LUMENS	VOLTAGE	CCT	DETECTION RANGE	FINISH
OMSSL-LED-102	☐ 2700L	☐ 120	☐ 30K ☐ 40K ☐ 50K	☐ 150-150° angle ☐ 180-180° angle	☐ WH ☐ BZ

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.





LED OUTDOOR SERIES



OWM-R-201-LED



LED Wall Mount Round Medallion

Example: **OWM-R-201-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-R-201-LED Grid Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell

OWM-R-202-LED


LED Wall Mount Round Medallion

Example: **OWM-R-202-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-R-202-LED Half Cut-Off Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell

OWM-R-203-LED

LED Wall Mount Round Medallion

Example: **OWM-R-203-LED-2000L-MVOLT-50K-BZ**


CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-R-203-LED Open Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell

LED OUTDOOR SERIES



OWM-R-301-LED

LED Wall Mount Round Medallion




Example: **OWM-R-301-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-R-301-LED Grid Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell



OWM-R-302-LED

LED Wall Mount Round Medallion




Example: **OWM-R-302-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-R-302-LED Half Cut-Off Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell



OWM-R-303-LED

LED Wall Mount Round Medallion



Example: **OWM-R-303-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-R-303-LED Open Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell




LED OUTDOOR SERIES



OWM-S-201-LED

LED Wall Mount Square Medallion




Example: **OWM-S-201-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-S-201-LED Grid Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell

OWM-S-202-LED

LED Wall Mount Square Medallion




Example: **OWM-S-202-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-S-202-LED Half Cut-Off Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell

OWM-S-203-LED

LED Wall Mount Square Medallion



Example: **OWM-S-203-LED-2000L-MVOLT-50K-BZ**

CATALOG NO.	LUMENS	DIMMING	CCT	FINISH	ACCESSORIES
OWM-S-203-LED Open Frame Medallion	☐ 1200L ☐ 2000L	☐ MVOLT	☐ 40K	☐ BZ ☐ WH ☐ BK	☐ PHC-Photocell

EMERGENCY LIGHTING SERIES

ELM-805

Halogen Emergency Light with Battery Back-Up



Example: **ELM-805-W**

CATALOG NO.	FINISH
ELM-805	☐ W - White

ELM-LED-803

LED Emergency Light W/ Battery Back-Up




Example: **ELM-LED-803-W**

CATALOG NO.	FINISH
ELM-LED-803	☐ W - White ☐ B - Black



ELM-806

Bevel Integral Dual Head Emergency Light



Example: **ELM-806-W**

CATALOG NO.	FINISH
ELM-806	☐ W - White ☐ B - Black

ELM-LED-807

Outdoor Die-Cast Emergency Light w/ Battery Back-up



Example: **ELM-LED-807-W**

CATALOG NO.	FINISH	OPTION
ELM-LED-807	☐ WH - White ☐ BZ - Bronze ☐ BK - Black	☐ HTR - Internal Heater

ELM-810

Compact Wet Location Halogen Emergency Light



Example: **ELM-810**

ELM-815

City of New York Approved 50W Heavy-Duty Emergency Light



Example: **ELM-815**

CATALOG NO.	LAMP V	INPUT V	LAMP W	FINISH
ELM-814	12V	50W	12	☐ W - White

* Available wattage for remote application: 14W

ELM-819

50W Halogen Emergency Light



Example: **ELM-819**

ELM-600

Emergency Recessed Light



Example: **ELM-600**

EMERGENCY LIGHTING SERIES

ELM-809

MR16 Emergency Light w/ Battery Back-up



Example: ELM-809-W

CATALOG NO.	FINISH
ELM-809	☐ W - White ☐ B - Black

ELM-851

Architecture Emergency Lighting



Example: ELM-851-W

CATALOG NO.	FINISH
ELM-851	☐ W - White ☐ B - Black

ELM-LED-860

LED Adjustable Optics Emergency Unit




Example: ELM-LED-860-W

CATALOG NO.	FINISH
ELM-LED-860	☐ W - White ☐ B - Black

ELM-LED-806

LED Bevel Integral Dual Head Emergency Light



Example: ELM-LED-806-W

CATALOG NO.	FINISH
ELM-LED-806	☐ W - White ☐ B - Black

ELM-LED-862

LED Low-Profile, Thermoplastic Emergency Lights



Example: ELM-LED-862-W

CATALOG NO.	FINISH	OPTION
ELM-LED-862	☐ W - White ☐ B - Black	☐ RC - Remote capable ☐ SPV - 120V/230V/ - 50/60Hz

ELM-832

Single Head Damp Location 6V 5W Remote Head



Example: ELM-832

ELM-859

Single Head Wet Location 7.2W Remote Head



Example: ELM-859

ELM-860

Double Head Wet Location 7.2W Remote Head




Example: ELM-860

EXIT SIGN LIGHTING SERIES

ELX-631

Adjustable Recessed LED Edge-Lit Exit Sign with Dual Circuit

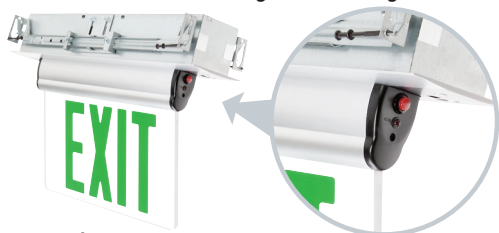

Example: **ELX-631-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-631	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror

ELX-611

Adjustable LED Edge-Lit Exit Sign with Battery Back-Up



Example: **ELX-611-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-611	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror

ELX-604

LED Edge-Lit Exit Sign with Emergency Battery Back-Up



Example: **ELX-604-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-604	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror
		☐ B - Black		

ELX-608

LED Edge-Lit Exit Sign with Dual Circuit



Example: **ELX-608-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-608	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror
		☐ B - Black		

ELX-609

Recessed LED Edge-Lit Exit Sign with AC Input



Example: **ELX-609-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-609	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror
		☐ B - Black		

ELX-613

Recessed LED Edge-Lit Exit Sign with Dual Circuit



Example: **ELX-613-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-613	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror
		☐ B - Black		

ELX-606

Recessed LED Edge-Lit Exit Sign with Emergency Battery Back-Up



Example: **ELX-606-G-AL-1-CL**

CAT. NO.	LETTER	HOUSING	FACE	PANEL
ELX-606	☐ G - Green	☐ AL - Aluminum	☐ 1 - 1 face	☐ CL - Clear
	☐ R - Red	☐ W - White	☐ 2 - 2 faces	☐ MR - Mirror
		☐ B - Black		

ELX-715

City of New York Approved Heavy Duty LED Exit Sign with AC Input



Example: **ELX-715**

CATALOG NO.	COLOR	BATTERY
ELX-715	☐ W - White	☐ AC - AC only
	☐ B - Black	

EXIT SIGN LIGHTING SERIES

ELX-503

LED Exit Sign with AC Only

Example: **ELX-503-R-W**

CAT. NO.	LETTER	HOUSING
ELX-503	☐ G - Green	☐ W - White
	☐ R - Red	☐ B - Black

ELX-504

Thermoplastic Exit Sign with Dual Circuit

Example: **ELX-504-G-W**

CAT. NO.	LETTER	HOUSING
ELX-503	☐ G - Green	☐ W - White
	☐ R - Red	☐ B - Black

ELX-603

Thermoplastic Exit Sign with Battery Back-Up

Example: **ELX-603-G-W**

CAT. NO.	LETTER	HOUSING
ELX-603	☐ G - Green	☐ W - White
	☐ R - Red	☐ B - Black

ELX-629

Thermoplastic LED Exit Sign Remote Capable with Battery Back-Up

Example: **ELX-629-R-W**

CAT. NO.	LETTER	HOUSING
ELX-629	☐ G - Green	☐ W - White
	☐ R - Red	☐ B - Black

ELX-505

LED Die-Cast Exit Sign with Dual Circuit

Example: **ELX-505-R-AL-AL-1**

CAT. NO.	LETTER	HOUSING	HOUSING	FACE
ELX-505	☐ G - Green	☐ AL - Aluminum	☐ AL - Aluminum	☐ 1 - 1 face
	☐ R - Red	☐ W - White	☐ W - White	☐ 2 - 2 faces
		☐ B - Black	☐ B - Black	

ELX-617

LED Die-Cast Exit Sign with AC Input

Example: **ELX-617-G-AL-AL-1**

CAT. NO.	LETTER	HOUSING	HOUSING	FACE
ELX-617	☐ G - Green	☐ AL - Aluminum	☐ AL - Aluminum	☐ 1 - 1 face
	☐ R - Red	☐ W - White	☐ W - White	☐ 2 - 2 faces
		☐ B - Black	☐ B - Black	

ELX-605


Recessed LED Edge-Lit Exit Sign with Emergency Battery Back-Up

Example: **ELX-605-G-AL-AL-1**

CAT. NO.	LETTER	HOUSING	HOUSING	FACE
ELX-605	☐ G - Green	☐ AL - Aluminum	☐ AL - Aluminum	☐ 1 - 1 face
	☐ R - Red	☐ W - White	☐ W - White	☐ 2 - 2 faces
		☐ B - Black	☐ B - Black	

ELX-615

Photoluminescent Exit Sign

Example: **ELX-615-G-1**

CAT. NO.	LETTER	FACE
ELX-615	☐ G - Green	☐ 1 - 1 face
	☐ R - Red	
	☐ B - Black	

EXIT SIGN AND EMERGENCY LIGHTING SERIES

ELX-709

Wet Location Exit Sign with Emergency Battery Back-Up



Example: **ELX-709-R-EM**

CAT. NO.	LETTER	OPERATION
ELX-709	☐ G - Green ☐ R - Red	☐ AC - AC only ☐ EM - Battery Back-up

ELX-LED-703

LED Exit/Emergency Light Combination w/ Battery Back-Up



Example: **ELX-LED-703-R-W**

CAT. NO.	LETTER	HOUSING
ELX-LED-703	☐ G - Green ☐ R - Red	☐ W - White ☐ B - Black

ELX-LED-735

Red LED Exit/Emergency Light Combo w/ Battery Back-up



Example: **ELX-LED-735-R-W**

CAT. NO.	LETTER	HOUSING
ELX-LED-735	☐ G - Green ☐ R - Red	☐ W - White ☐ B - Black

ELX-713

LED Exit/Emergency Combo w/ Battery Back-up & Remote Capable



Example: **ELX-713-G-W**

CAT. NO.	LETTER	HOUSING
ELX-713	☐ G - Green ☐ R - Red	☐ W - White ☐ B - Black

ELX-LED-704

LED Exit/Emergency Light Combination with Emergency Battery Back-up



Example: **ELX-LED-704-R-W**

CAT. NO.	LETTER	HOUSING
ELX-LED-704	☐ G - Green ☐ R - Red	☐ W - White ☐ B - Black

ELX-LED-719

Wet Location LED Exit Sign with Emergency Light Combination with Battery Backup



Example: **ELX-LED-719-G-W**

CAT. NO.	LETTER	HOUSING
ELX-LED-719	☐ G - Green ☐ R - Red	☐ W - White

ELX-LED-718

Ultra Slim Full LED Exit/Emergency Light Combination with Battery Back-up



Example: **ELX-LED-718-R-W**

CAT. NO.	LETTER	HOUSING
ELX-LED-718	☐ G - Green ☐ R - Red	☐ W - White ☐ B - Black

ELX-LED-803

Canada Approved Running Man All LED Exit Sign & Emergency Combo



Example: **ELX-LED-803**


CAT. NO.	HOUSING	FACE	PANEL
ELX-LED-803	☐ W - White ☐ B - Black	☐ 2 - Universal Single/Double Face	☐ RC - Remote Capable ☐ HL - High Lumen ☐ SDT - Self-Diagnostic

LED TRACK LIGHTING SERIES

ET-LED-217

LED Track Fixture

1100
LUMENS




Example: **ET-LED-217-1100L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1100L-DIMTR-120	☐ 30K-90	☐ WFL - 30°	☐ ABK - Black ☐ AWH - White

ET-LED-216

LED Track Fixture

800
LUMENS




Example: **ET-LED-216-800L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 800L-DIMTR-120	☐ 30K-90	☐ FL - 28°	☐ ABK - Black ☐ AWH - White

ET-LED-336

LED Track Fixture

1300
LUMENS




Example: **ET-LED-336-1300L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1300L-DIMTR-120	☐ 30K-90	☐ WFL - 30°	☐ ABK - Black ☐ AWH - White

ET-LED-326

LED Track Fixture

800
LUMENS




Example: **ET-LED-326-800L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 800L-DIMTR-120	☐ 30K-90	☐ FL - 28°	☐ ABK - Black ☐ AWH - White

ET-LED-213

LED Track Fixture

1100
LUMENS




Example: **ET-LED-213-1100L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1100L-DIMTR-120	☐ 30K-90	☐ WFL - 30°	☐ ABK - Black ☐ AWH - White

ET-LED-212

LED Track Fixture

800
LUMENS




Example: **ET-LED-212-800L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 800L-DIMTR-120	☐ 30K-90	☐ FL - 28°	☐ ABK - Black ☐ AWH - White

ET-LED-302

LED Track Fixture

1100
LUMENS




Example: **ET-LED-302-1100L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1100L-DIMTR-120	☐ 30K-90	☐ FL - 30°	☐ ABK - Black ☐ AWH - White

ET-LED-322

LED Track Fixture

800
LUMENS



Example: **ET-LED-322-800L-DIMTR-120-30K-90**


LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 800L-DIMTR-120	☐ 30K-90	☐ WFL - 38°	☐ ABK - Black ☐ AWH - White

LED TRACK LIGHTING SERIES

ET-LED-310

LED Track Fixture

1100
LUMENS




Example: **ET-LED-310-1100L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1100L-DIMTR-120	☐ 30K-90	☐ FL - 28°	☐ ABK - Black ☐ AWH - White

ET-LED-309

LED Track Fixture

800
LUMENS




Example: **ET-LED-309-800L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 800L-DIMTR-120	☐ 30K-90	☐ WFL - 30°	☐ ABK - Black ☐ AWH - White

ET-LED-312

LED Track Fixture

1200
LUMENS




Example: **ET-LED-312-1200L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1200L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 25° ☐ FL - 38°	☐ ABK - Black ☐ AWH - White

ET-LED-311

LED Track Fixture

600
LUMENS




Example: **ET-LED-311-600L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 600L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 25° ☐ FL - 38° ☐ WFL - 60°	☐ ABK - Black ☐ AWH - White

ET-LED-331

LED Track Fixture

600
LUMENS




Example: **ET-LED-331-600L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 600L-DIMTR-120	☐ 30K-90	☐ NFL - 25° ☐ FL - 38° ☐ WFL - 60°	☐ ABK - Black ☐ AWH - White

ET-LED-330

LED Track Fixture

500
LUMENS




Example: **ET-LED-330-500L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 500L-DIMTR-120	☐ 30K-90	☐ NFL - 25° ☐ FL - 38° ☐ WFL - 60°	☐ ABK - Black ☐ AWH - White

ET-LED-324

LED Track Fixture

500
LUMENS




Example: **ET-LED-324-500L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 500L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 25° ☐ FL - 38° ☐ WFL - 60°	☐ ABK - Black ☐ AWH - White

ET-LED-325

LED Track Fixture

600
LUMENS



Example: **ET-LED-325-600L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 600L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 25° ☐ FL - 38° ☐ WFL - 60°	☐ ABK - Black ☐ AWH - White

LED TRACK LIGHTING SERIES


ET-LED-351

LED Track Fixture

NEW



1200
LUMENS



Example: **ET-LED-351-1200L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1200L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 25° ☐ FL - 38° ☐ WFL - 60°	☐ ABK - Black ☐ AWH - White


ET-LED-352

LED Track Fixture

NEW



1500
LUMENS



Example: **ET-LED-352-1500L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 1500L-DIMTR-120	☐ 30K-90	☐ NFL - 34°	☐ ABK - Black ☐ AWH - White


ET-LED-353

LED Track Fixture

NEW



2000
LUMENS



Example: **ET-LED-353-2000L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 2000L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 24° ☐ FL - 36°	☐ ABK - Black ☐ AWH - White


ET-LED-354

LED Track Fixture

NEW



2500
LUMENS



Example: **ET-LED-354-2500L-DIMTR-120-30K-90**

LUMEN/DIMMING	CCT/CRI	FACE	COLOR
☐ 2500L-DIMTR-120	☐ 30K-90	☐ S - 15° ☐ NFL - 24° ☐ FL - 36°	☐ ABK - Black ☐ AWH - White



LED TAPE LIGHT SERIES

LB100 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.

up to
127
*LUMENS
per/foot

16'
Maximum
Continuous run

12V
DC
Voltage

140°
View
Angle

TYPE:

- LB100-15F-65K (Cool White)
- LB100-15F-30K (Warm White)
- LB100-15F-RED
- LB100-15F-AMBER
- LB100-15F-GREEN
- LB100-15F-BLUE



INDOOR TAPE LIGHT

LB102 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.

up to
127
*LUMENS
per/foot

32'
Maximum
Continuous run

24V
DC
Voltage

120°
View
Angle

TYPE:

- LB102-30F-65K (Cool White)
- LB102-30F-30K (Warm White)



INDOOR TAPE LIGHT

LB103 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.

HIGH LUMEN

up to
400
*LUMENS
per/foot

16'
Maximum
Continuous run

12V
DC
Voltage

130°
View
Angle

**HIGH
LUMEN**

TYPE:

- LB103-15F-65K (Cool White)
- LB103-15F-30K (Warm White)



INDOOR TAPE LIGHT

LB106 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.

up to
127
*LUMENS
per/foot

16'
Maximum
Continuous run

12V
DC
Voltage

140°
View
Angle

TYPE:

- LB106-15F-65K (Cool White)
- LB106-15F-30K (Warm White)
- LB106-15F-RED
- LB106-15F-AMBER
- LB106-15F-GREEN
- LB106-15F-BLUE



INDOOR TAPE LIGHT

LB101 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



TYPE:

- LB101-15F-RGB

ELECTRICAL:

- Remote control and adapter required.
- RGB tape light controller has 11 different modes and can be controlled via a remote control device.



INDOOR TAPE LIGHT

LB200 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



TYPE:

- LB200-15F-65K (Cool White)
- LB200-15F-30K (Warm White)
- LB200-15F-RED
- LB200-15F-AMBER
- LB200-15F-GREEN
- LB200-15F-BLUE



OUTDOOR TAPE LIGHT

LB201 SERIES



FEATURES:

- Pre-applied 3M tape allows for fast, hassle free installation
- Field cuttable every 2" or 3 LED's.
- Easy connectors allow for simple plug and play installation.
- UV rays and infrared wavelength are non existent.



TYPE:

- LB201-15F-RGB

ELECTRICAL:

- Remote control and adapter required.
- RGB tape light controller has 11 different modes and can be controlled via a remote control device.



OUTDOOR TAPE LIGHT

Driver



- ☐ LB100-DR-12V-30W
- ☐ LB100-DR-12V-60W

Mini Channel Mounting System

FEATURES

Easy to snap together top and bottom design



DIMENSIONS

Length: 50"
Height: 1/2"
Width: 3/4"

FINISH

- ☐ LB100-BC-AL (Aluminium- Base Channel)
- ☐ LB100-BC-WH (White- Base Channel)
- ☐ LB100-BC-CL (Clear- Base Channel)
- ☐ LB100-TC-CL (Clear- Top Cover)
- ☐ LB100-TC-CLF (Clear Frosted- Top Cover)
- ☐ LB100-TC-WH (White- Top Cover)
- ☐ LB100-TC-WF (White Frosted- Top Cover)

DISTRIBUTOR LISTS

1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	

31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	



The products shown in this catalog are covered by USA and international patents.
Specifications are subject to change without prior notice.
Elite Lighting reserves the right to make any changes in the design, construction
and listing approval of the products listed in this catalog which may be required by
law or by the rules of any regulatory body or at its discretion.
Dimensions and specifications are subject to change without prior notice.
Not responsible for any typographical errors.
Wattage and specifications may be different for products supplied in CANADA.

Main Office: Los Angeles, CA

• Tel: 1-323-888-1973 / 1-877-375-5555

• Fax: 1-323-888-1977 / 1-877-375-3333