






## Ordering Information


Ordering Code	Description	Approbations	Communication Network	Dimming Protocols
45678	CLM DIM	UL and CE	Wireless	0-10V, DALI/DEXAL, DALI Type 8

## Wireless System Overview

This illustration shows how each component is easily integrated into the Encelium X Lighting Control System. The Connected Lighting Module (CLM) allows luminaires to be wirelessly controlled. The System Manager sends dedicated commands wirelessly to each CLM enabling individually controlled luminaires.

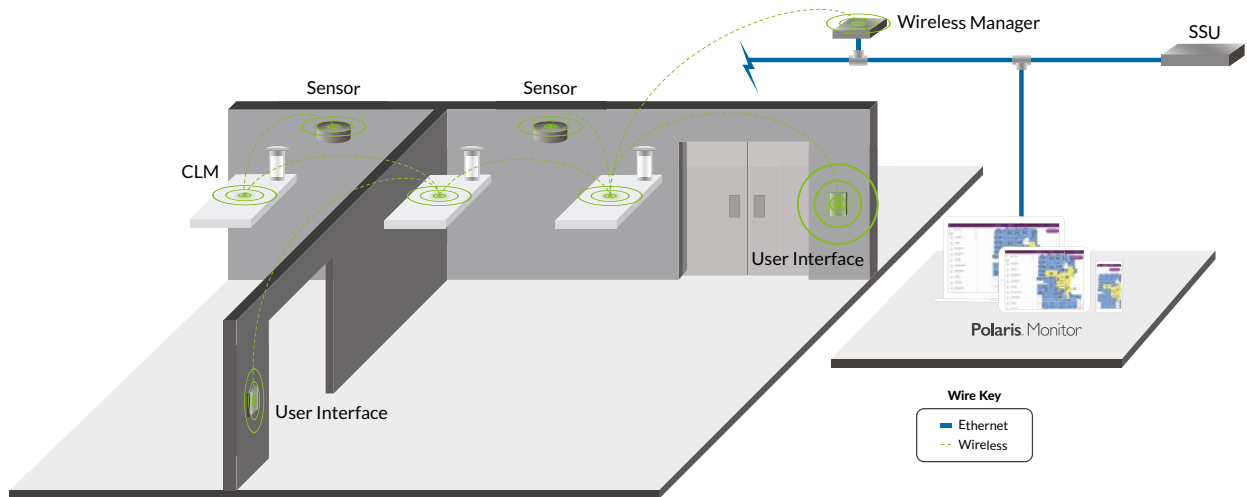

## CLM Wiring Diagrams

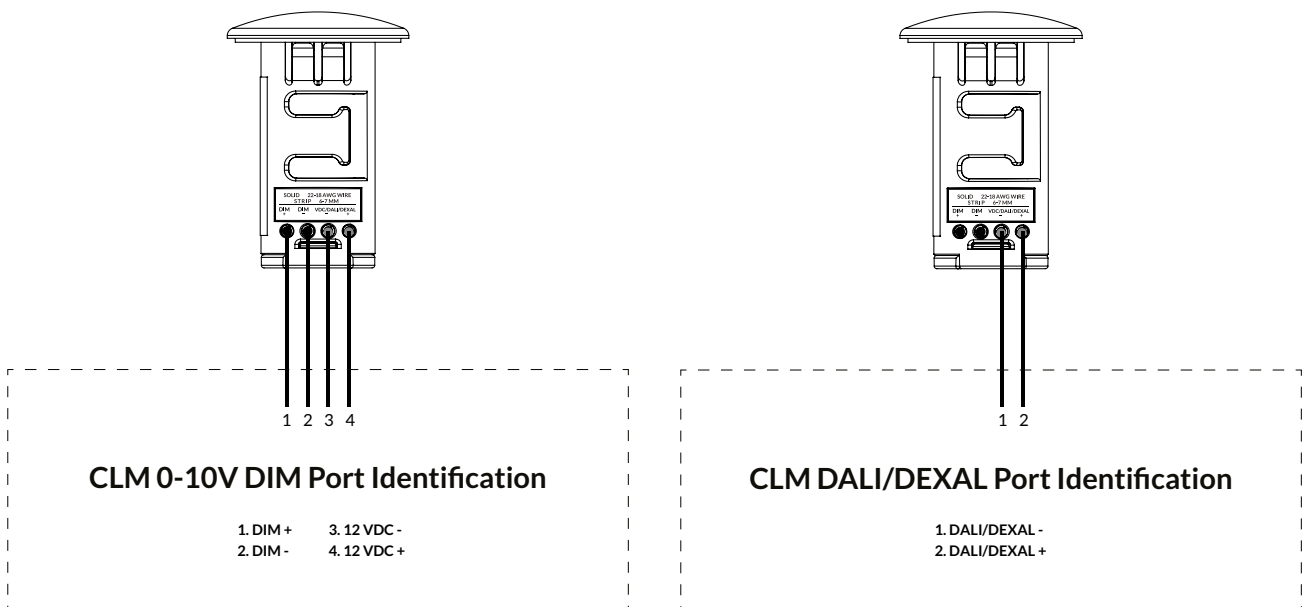


NOTE: DEXAL is a DALI driver with self-powered DALI link. See Installation Instructions for additional wiring methods.

## Mounting Option

---

### Luminaire Mount

Luminaire Top Mount

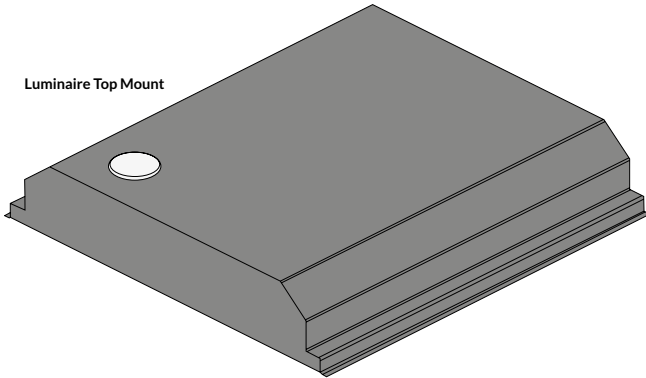

Luminaire Side Mount

