

Specifications of LED Instant Flexilight:

| Structure | Voltage | Max. Loading Length (Color) | Cutting Unit (Color) | Bulb Spec. | Number of Bulbs/Unit | Wattage |
|-----------|----------|-----------------------------|----------------------|------------|----------------------|------------|
| | 110-120V | 600' (WW, CW, B, G) | 40" (WW, CW, B, G) | LED | 36 | 0.8W/foot |
| | | 900' (R, Y) | 54" (R, Y) | LED | 54 | 0.53W/foot |
| | 24V | 100' (WW, CW, B, G) | 6" (WW, CW, B, G) | LED | 6 | 0.88W/foot |
| | | 200' (R, Y) | 4" (R, Y) | LED | 12 | 0.44W/foot |
| | 12V | 50' (WW, CW, B, G) | 3" (WW, CW, B, G) | LED | 6 | 0.88W/foot |
| | | 100' (R, Y) | 6" (R, Y) | LED | 12 | 0.44W/foot |

Packages Available

| Item Number | Length | Package |
|----------------|--------|---------|
| ER-LED-120-150 | 150' | /Roll |
| ER-LED-24-150 | 150' | /Roll |
| ER-LED-12-150 | 150' | /Roll |

No Driver Required/ Rectifier Included

ER-LED - 120 - 150 - COLOR

Item No. Voltage Length Specify color

(Available in 150' Rolls only, no custom cut)

NOTE: Each Roll Includes; 3pcs ERIFL-XXX Power Cords, 3pcs F4 End Caps


| NOTE: | Cat# | LED Voltage | LED Length | Max. Wattage |
|--------------------------|-------------|-------------|------------|--------------|
| LED Magnetic Transformer | M100L-12-DC | 12V | 50' | 75w |
| | M100L-24-DC | 24V | 100' | 100w |

LED Instant Flexilight Accessories:

- ERIFL-F106 -120V LED Flexilight 6ft. Power Cord w/ Power Connector
- ERIFL-F107 -24V LED Flexilight 6ft. Power Cord w/ Power Connector
- ERIFL-F107 -12V LED Flexilight 6ft. Power Cord w/ Power Connector



- F4 LED Flexilight End Caps
- F5 LED Flexilight Tie Strap
- F6 LED Flexilight Mounting Clip
- F7 LED Flexilight Suction Cup
- F8 LED Flexilight 6 ft. Channel
- F10 LED Flexilight Y-Cable Connector
- F14 Housing Clam for Splice Connector
- F103 LED Flexilight PVC Connector
- F22 LED Flexilight PVC T-Connector
- F23 LED Flexilight PVC X-Connector

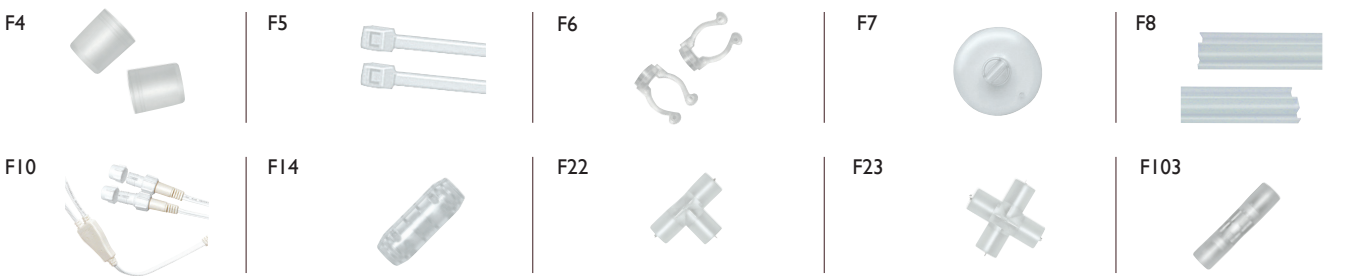

FLEXIBLE ROPELIGHT

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.