

ELM-806

Beveled Integral Dual Head Emergency Light

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



FEATURES

This fixture is an excellent choice when an attractive emergency light is required. In cases of AC power loss, it provides a minimum of 90 minutes illumination. A trouble-free lead-calcium battery is provided with the fixture.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Compartment shaped by injection.
- Power may be supplied via wall or ceiling

FACE

- The face has two square lamp heads that are fit into bevels on either side and each has a reflector and diffuser

MOUNTING

- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided electrical

ELECTRICAL

- 120V or 277V input
- Reset is automatic
- Wire can be connected easily, without additional equipment

LAMPS

- Two 5W T5 wedged-base lights for emergency use

BATTERY


- Replaceable and requires no maintenance
- 6V, 4 amp-hour sealed-lead acid battery
- Allows continued operation during power failures
- Provides 90 minutes of emergency power on a full charge

TESTING

- Test button indicator light shows high charge and readiness for operation

LISTED

- Damp location approved

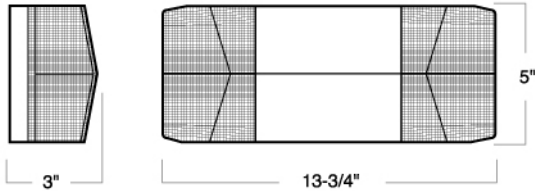

ELM-806 - ITEM SELECTOR: (Please check the boxes below for the option desired)

HOUSING COLOR	CANOPY
<input type="checkbox"/> W - White	UNIVERSAL MOUNT TO WALL OR CEILING
<input type="checkbox"/> B - Black	

Specified:

ELM-806

HOUSING COLOR



MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011