


GROOVE-LED

UP TO
2500
LUMENS



GROOVE LED PENDANT SERIES

DIMENSIONS:

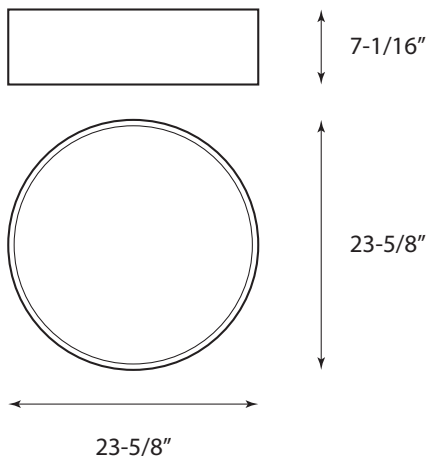

Catalog Number:

Project Name:

Type:

Note:

ORACLE
LIGHTING

APPLICATION - Groove's architectural shapes replicate an ambiance of nature. It complements any space when a holistic and or nature themed décor is desired. Groove is a great addition for a serene lobby or a tranquil space. Subconsciously, it will bring the outdoors in, sending subtle reminders that nature surrounds you.

CONSTRUCTION - Rigid aluminum design ensures longevity and endurance plus a high quality, high transmission, glare free lens for smooth illumination. Groove offers side lit detail silhouetting organic shapes.

PERFORMANCE - The honeycomb light engines found in the Groove is rated at 80+ CRI and are available in multiple CCTs: 3000K, 3500K and 4000K. Rated and tested to LM-79 and LM-80 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

ELECTRICAL - Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING - The GROOVE-LED comes standard with 0-10V dimming on either in 120 and 277V. 347V please consult factory. Dimmable down to 1% of initial lumens. Also available in Lutron dimming options. Consult factory for dimmer compatibility.

MOUNTING - Comes standard in ceiling mount or adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Consult factory for additional mounting options.

QUALITY CONTROL - Every fixture is rigorously tested by our QC Department before shipping.

LISTING - ETL/C-ETL listed to US and Canadian standards

WARRANTY - Limited 5 Year Warranty

EXAMPLE: GROOVE-LED-2-1500L-DIM10-MVOLT-40K-WH-CM

SERIE	SIZE	LUMENS - DIMMING	CCT	EMERGENCY	COLOR	MOUNTING OPTION
GROOVE-LED	2' (1.9')	<input type="checkbox"/> 2500L-DIM10-MVOLT <input type="checkbox"/> 2500L-LUTH-MVOLT <input type="checkbox"/> 2500L-DIMTR-120	<input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> EMG-LED Remote Mounted for Surface Mount	<input type="checkbox"/> WH (Matt White) Custom color available, please consult factory. Must provide RAL#	<input type="checkbox"/> CM -Ceiling Mount <input type="checkbox"/> SM -10' Suspended Mount (Consult factory for other sizes)

