


OPR-LED

UP TO
7000
LUMENS

OPR LED PENDANT SERIES



DIMENSIONS:

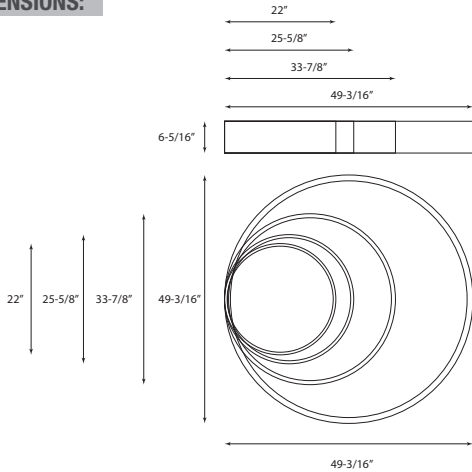

Available Colors



Catalog Number:

Project Name:

Type:

Note:

ORACLE
LIGHTING

APPLICATION - OPR-LED pendants offer direct ambient illumination. Its clean, classic look provides light over any environment including schools, boardrooms, office areas, hotels, lobbies, restaurants, etc. OPR-LED is suitable for any design application with its variety in sizes.

CONSTRUCTION - Rigid aluminum design ensures longevity and endurance. A high quality, high transmission, glare free lens offers smooth illumination.

PERFORMANCE - The honeycomb light engines found in the OPR-LED are rated at 80+ CRI and are available in multiple CCTs: 3000K, 3500K and 4000K. Rated and tested to LM-79 and LM-80 standards. The LEDs are also binned to a 3-step MacAdam ellipse to achieve consistent color from fixture to fixture.

ELECTRICAL - Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING - The OPR-LED comes standard with 0-10V dimming on either 120, in and 277V. 347V please consult factory. Dimmable down to 1% of initial lumens. Also available in Lutron dimming options. Consult factory for dimmer compatibility.

MOUNTING - Comes standard in ceiling mount or adjustable cable suspension system providing fast installation into a variety of interior heights, including sloped ceilings. Consult factory for additional mounting options.

QUALITY CONTROL - Every fixture is rigorously tested by our QC Department before shipping.

LISTING - ETL/C-ETL listed to US and Canadian standards

WARRANTY - Limited 5 Year Warranty

EXAMPLE: OPR-LED-1-3000L-DIM10-MVOLT-40K-WH-CM						
SERIE	SIZE	LUMENS - DIMMING	CCT	EMERGENCY	COLOR	MOUNTING OPTION
OPR-LED	<input type="checkbox"/> 1' (1.5')	<input type="checkbox"/> 2000L-DIM10-MVOLT <input type="checkbox"/> 2000L-LUTTH-MVOLT <input type="checkbox"/> 2000L-DIMTR-120	<input type="checkbox"/> 30K <input type="checkbox"/> 35K <input type="checkbox"/> 40K	<input type="checkbox"/> EMG-LED Remote Mounted for Surface Mount	<input type="checkbox"/> WH (Matt White) <input type="checkbox"/> BK (Black) <input type="checkbox"/> SI (Silver) Custom color available, please consult factory. Must provide RAL#	<input type="checkbox"/> CM-Ceiling Mount <input type="checkbox"/> SM-10' Suspended Mount (Consult factory for other sizes)
	<input type="checkbox"/> 2' (2')	<input type="checkbox"/> 3000L-DIM10-MVOLT <input type="checkbox"/> 3000L-LUTTH-MVOLT <input type="checkbox"/> 3000L-DIMTR-120				
	<input type="checkbox"/> 3' (2.8')	<input type="checkbox"/> 7000L-DIM10-MVOLT <input type="checkbox"/> 7000L-LUTTH-MVOLT <input type="checkbox"/> 7000L-DIMTR-120				
	<input type="checkbox"/> 4' (4')	<input type="checkbox"/> 11000L-DIM10-MVOLT <input type="checkbox"/> 11000L-LUTTH-MVOLT <input type="checkbox"/> 11000L-DIMTR-120				

