


MULTILUMEN SELECTOR EASY 3 COLORS
SELECTOR
3500K • 4000K • 5000K

DIMENSIONS

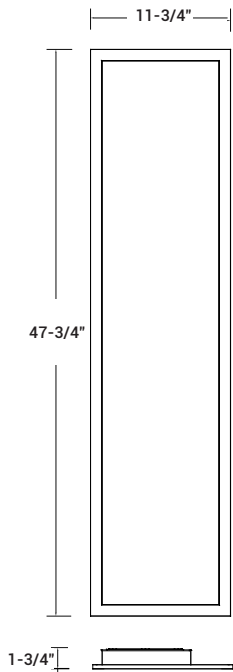

| NOMINAL LUMENS | DELIVERED LUMENS | WATTAGE |
|----------------|------------------|---------|
| 5000 | 4756 | 38W |
| 4000 | 3634 | 28W |
| 3000 | 3192 | 24W |

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

This edge-lit LED flat panel boasts an ultra-low UGR<16 while delivering exceptional performance, for a radiant, even, glare-free and energy efficient illumination. Ideal for optimizing shallow plenum spaces and use in new construction or retrofit applications. Standard with multi-lumen and multi-CCT options.

Suitable for recessed or surface mounted installations in commercial office space, retail merchandising, educational, and healthcare facilities. IC rated, and ready for contact with insulation. Available in 1x4 ft, 2x2 ft, and 2x4 ft sizes.

| | |
|---------------------|---|
| LUMENS | 3000L/4000L/5000L |
| CCT | 35K/40K/50K |
| CRI | 85+ Standard |
| COLOR QUALITY | 3 Step MacAdam Ellipse |
| MOUNTING | Recessed |
| UGR | <16 |
| DIMMING | 0-10V Flicker Free 5% Dimming Standard (DIM10) |
| SIZE: | 1' x 4' |
| FINISH | White |
| EMERGENCY | 10W - Up to 1000L output 20W - Up to 2000L output |
| WORKING TEMPERATURE | -20 °C (-4°F) to 50 °C (122°F) |
| LIFETIME | L70 at 60,000 Hours |
| PHOTOMETRIC TESTS | In accordance with IES LM79-08, LM80 and TM-30, TM-21 |

OPTICAL PERFORMANCE

| UGR Values of 1x4 @ 85CRI and 3000K 70% 50% 20% Coefficients of Utilization - Zonal Cavity Method 4H x 8H room size | | |
|---|-----------|---------|
| LUMEN PACKAGE | CROSSWISE | ENDWISE |
| 5000L | 17.4 | 17.9 |
| 4000L | 16.5 | 17 |
| 3000L | 16.9 | 16.7 |



OPTICS

Features a polystyrene lens and an internal PMMA light guiding plate combine to achieve and uniform, glare-free glare-free illumination with an ultra low UGR<16.

Luminaire available in selectable lumens of 3000L/4000L/5000L. Three selectable color temperatures of 30K/35K/50K allow for versatile across different warm to cool moods and atmospheres.

Lumen factory set to 5000L. CCT factory set to 50K.

CONSTRUCTION

Frame built from light weight and durable aluminum with a heavy duty 20-gauge cold rolled steel back panel. Made with fully interlocking corners to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation.

Multiple wiring entrances allow for easy daisy chain making, adding power packs, whips, or other accessories in the field, or for continuous row mounting.

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocking for added structural strength.

Features built-in earthquake clips, standard.

MOUNTING

Suitable for Recessed, Suspended, and Surface Mounting.

For Recessed Mounting: Luminaire accommodates lay-in ceilings only for 15/16" flat. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips.

Surface mounting kit sold separately. Surface mounting kit required when suspending fixture.

MAINTENANCE

Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTIONS & ACCESSORIES

Luminaires can be shipped pre-installed with whips and modular wiring systems.

Available to order separately with:

- 10W and 20W Emergency Battery Back-up options
- 1'x4' Flange Kit and 1'x4' Surface Mount Kit for surface mounting and suspension
- Internal Blow fuse and radio interference options
- Optional Made in America Compliance
- Optional digital lighting manager for ON/OFF 0-10V dimming

See ordering chart for more information.

DIMMING

DIM10 - Flicker Free 5% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277V.

DRIVER & ELECTRICAL INFORMATION

Powered by high-quality constant-current LED drivers which are rated for 50 to 60Hz at 120/277v input. Produce less than 20% THD, and have a power factor of .90 to 1.00.

WARRANTY

5-year warranty for parts and components (labor not included).

LISTINGS

- c-UL-us listed for feed through wiring.
- DLC listed.
- Damp location rated.
- IC-Rated, air-tight ready, and ready for direct contact with insulation.
- Can be used to comply with Title 24, non residential listing requirements.

Example: **14-FPL1-LUGR-LED-3000L-4000L-5000L-DIM10-MVOLT-35K-40K-50K-85**

| | | | | | | | |
|------------------------------------|-------------------|----------------------|------------------|-------------|------------|--|--|
| 14-FPL1-LUGR-LED | | | | | | | |
| SERIES | LUMENS | DIMMING | VOLTAGE | CCT | CRI | EMERGENCY | SENSOR |
| 14-FPL1-LUGR-LED LED FLAT PANEL | 3000L/4000L/5000L | DIM10- 0-10V Dimming | MVOLT 120-277 | 35K/40K/50K | 85 | EMG-LED-G3-CP-10W-FLEX EMG-LED-G3-CP-20W-FLEX | 14FK - 1' x 4' Flange Kit 14-FPL1-LED-SMK - 1'x4' Surface Mount Kit SBF - Internal Slow Blow Fuse SBF - Radio Interference RIS - Suppressor USA - Made in America Compliance LMFC-011 - Digital Lighting Manager |

14-FPL1-LUGR-LED-3000L-4000L-5000L-DIM10-MVOLT-35K-40K-50K-85(3000L)

TEST NO.: **EL08292458**


INPUT WATTS: **24.4**

LUMENS: **3192**

EFFICACY: **131**

BEAM ANGLE: **80**

SPACING CRITERIA: **1.15**



CANDELA TABLE

| | 0° | 90° |
|-----|------|------|
| 0° | 1624 | 1624 |
| 10° | 1631 | 1587 |
| 20° | 1530 | 1450 |
| 30° | 1254 | 1214 |
| 40° | 779 | 918 |
| 50° | 412 | 596 |
| 60° | 258 | 287 |
| 70° | 155 | 161 |
| 80° | 73 | 98 |
| 90° | 1 | 9 |

LUMINANCE (cd/sq.m)

| | 0.00° | 90.00° |
|--------|-------|--------|
| 0.00° | 4371 | 4371 |
| 45.00° | 2077 | 2851 |
| 55.00° | 1543 | 1999 |
| 65.00° | 1346 | 1366 |
| 75.00° | 1210 | 1260 |
| 85.00° | 1261 | 1867 |

LUMENS PER ZONE

| ZONE | LUMENS |
|-----------|--------|
| 0° - 10° | 154 |
| 10° - 20° | 440 |
| 20° - 30° | 632 |
| 30° - 40° | 665 |
| 40° - 50° | 504 |
| 50° - 60° | 335 |
| 60° - 70° | 222 |
| 70° - 80° | 137 |
| 80° - 90° | 56 |

ZONAL LUMEN SUMMARY

| ZONE | UMENS | % LUMINAIRE |
|----------|-------|-------------|
| 0° - 20° | 594 | 19% |
| 0° - 30° | 1227 | 38% |
| 0° - 40° | 1892 | 59% |
| 0° - 60° | 2731 | 86% |
| 0° - 80° | 3091 | 97% |
| 0° - 90° | 3147 | 99% |

CONE OF LIGHT

| MOUNTING HEIGHT | FC AT BEAM CENTER | BEAM DIA. 0° -180° | BEAM DIA. 90° -270° |
|-----------------|-------------------|--------------------|---------------------|
| 6.0 ft | 45.1 fc | 10.1 ft | 11.0 ft |
| 8.0 ft | 25.4 fc | 13.4 ft | 14.7 ft |
| 10.0 ft | 16.2 fc | 16.8 ft | 18.3 ft |
| 12.0 ft | 11.3 fc | 20.1 ft | 22.0 ft |
| 14.0 ft | 8.3 fc | 23.5 ft | 25.7 ft |
| 16.0 ft | 6.3 fc | 26.8 ft | 29.3 ft |
| 18.0 ft | 5.0 fc | 30.2 ft | 33.0 ft |
| 20.0 ft | 4.1 fc | 33.5 ft | 36.6 ft |

INDOOR COEFFICIENTS OF UTILIZATION

| pf | pc | 20% | | | | | | | | | | | | | | | | 0% |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | | 80% | | | | 70% | | | | 50% | | | | 30% | | | | |
| pw | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |
| | | | | | | | | | | | | | | | | | | |
| 1 | 110 | 106 | 102 | 99 | 107 | 103 | 100 | 97 | 99 | 96 | 94 | 95 | 92 | 90 | 91 | 89 | 88 | 85 |
| 2 | 101 | 94 | 88 | 83 | 99 | 92 | 87 | 82 | 89 | 84 | 80 | 85 | 81 | 78 | 82 | 79 | 76 | 74 |
| 3 | 94 | 84 | 77 | 72 | 91 | 83 | 76 | 71 | 80 | 74 | 69 | 77 | 72 | 68 | 74 | 70 | 67 | 65 |
| 4 | 87 | 76 | 68 | 62 | 85 | 75 | 68 | 62 | 72 | 66 | 61 | 70 | 64 | 60 | 68 | 63 | 59 | 57 |
| 5 | 81 | 69 | 61 | 55 | 79 | 68 | 60 | 55 | 66 | 59 | 54 | 64 | 58 | 53 | 62 | 57 | 53 | 51 |
| 6 | 75 | 63 | 55 | 49 | 73 | 62 | 55 | 49 | 60 | 54 | 48 | 59 | 53 | 48 | 57 | 52 | 47 | 46 |
| 7 | 70 | 58 | 50 | 44 | 68 | 57 | 49 | 44 | 55 | 49 | 44 | 54 | 48 | 43 | 53 | 47 | 43 | 41 |
| 8 | 66 | 53 | 46 | 40 | 64 | 53 | 45 | 40 | 51 | 45 | 40 | 50 | 44 | 39 | 49 | 43 | 39 | 37 |
| 9 | 62 | 49 | 42 | 37 | 60 | 49 | 42 | 37 | 48 | 41 | 36 | 46 | 40 | 36 | 45 | 40 | 36 | 34 |
| 10 | 58 | 46 | 39 | 34 | 57 | 45 | 38 | 34 | 44 | 38 | 33 | 43 | 37 | 33 | 42 | 37 | 33 | 31 |

14-FPL1-LUGR-LED-3000L-4000L-5000L-DIM10-MVOLT-35K-40K-50K-85(4000L)

TEST NO.: **EL08292458**


INPUT WATTS: **28.4**

LUMENS: **3634**

EFFICACY: **128**

BEAM ANGLE: **80**

SPACING CRITERIA: **1.15**



CANDELA TABLE

| | 0° | 90° |
|-----|------|------|
| 0° | 1863 | 1863 |
| 10° | 1873 | 1811 |
| 20° | 1758 | 1654 |
| 30° | 1441 | 1383 |
| 40° | 896 | 1025 |
| 50° | 470 | 674 |
| 60° | 297 | 319 |
| 70° | 179 | 176 |
| 80° | 84 | 104 |
| 90° | 1 | 2 |

LUMINANCE (cd/sq.m)

| | 0.00° | 90.00° |
|--------|-------|--------|
| 0.00° | 5013 | 5013 |
| 45.00° | 2389 | 3233 |
| 55.00° | 1775 | 2243 |
| 65.00° | 1548 | 1509 |
| 75.00° | 1392 | 1353 |
| 85.00° | 1455 | 1862 |

LUMENS PER ZONE

| ZONE | LUMENS |
|-----------|--------|
| 0° - 10° | 177 |
| 10° - 20° | 504 |
| 20° - 30° | 725 |
| 30° - 40° | 761 |
| 40° - 50° | 576 |
| 50° - 60° | 383 |
| 60° - 70° | 252 |
| 70° - 80° | 155 |
| 80° - 90° | 62 |

ZONAL LUMEN SUMMARY

| ZONE | UMENS | % LUMINAIRE |
|----------|-------|-------------|
| 0° - 20° | 681 | 19% |
| 0° - 30° | 1406 | 39% |
| 0° - 40° | 2168 | 60% |
| 0° - 60° | 3127 | 86% |
| 0° - 80° | 3534 | 97% |
| 0° - 90° | 3596 | 99% |

CONE OF LIGHT

| MOUNTING HEIGHT | FC AT BEAM CENTER | BEAM DIA. 0° -180° | BEAM DIA. 90° -270° |
|-----------------|-------------------|--------------------|---------------------|
| 6.0 ft | 51.7 fc | 10.0 ft | 10.9 ft |
| 8.0 ft | 29.1 fc | 13.4 ft | 14.5 ft |
| 10.0 ft | 18.6 fc | 16.7 ft | 18.1 ft |
| 12.0 ft | 12.9 fc | 20.1 ft | 21.7 ft |
| 14.0 ft | 9.5 fc | 23.4 ft | 25.3 ft |
| 16.0 ft | 7.3 fc | 26.7 ft | 29.0 ft |
| 18.0 ft | 5.7 fc | 30.1 ft | 32.6 ft |
| 20.0 ft | 4.7 fc | 33.4 ft | 36.2 ft |

INDOOR COEFFICIENTS OF UTILIZATION

| pf | pc | 20% | | | | | | | | | | | | | | | | 0% |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | | 80% | | | | 70% | | | | 50% | | | | 30% | | | | |
| pw | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |
| | | | | | | | | | | | | | | | | | | |
| 1 | 110 | 106 | 102 | 99 | 107 | 103 | 100 | 97 | 99 | 96 | 94 | 95 | 93 | 91 | 91 | 90 | 88 | 86 |
| 2 | 102 | 94 | 88 | 83 | 99 | 92 | 87 | 82 | 89 | 84 | 80 | 85 | 82 | 78 | 82 | 79 | 77 | 74 |
| 3 | 94 | 85 | 77 | 72 | 91 | 83 | 76 | 71 | 80 | 74 | 70 | 77 | 72 | 68 | 75 | 71 | 67 | 65 |
| 4 | 87 | 76 | 69 | 63 | 85 | 75 | 68 | 62 | 72 | 66 | 61 | 70 | 65 | 60 | 68 | 63 | 59 | 57 |
| 5 | 81 | 69 | 61 | 55 | 79 | 68 | 61 | 55 | 66 | 59 | 54 | 64 | 58 | 54 | 62 | 57 | 53 | 51 |
| 6 | 75 | 63 | 55 | 49 | 73 | 62 | 55 | 49 | 60 | 54 | 49 | 59 | 53 | 48 | 57 | 52 | 48 | 46 |
| 7 | 70 | 58 | 50 | 44 | 69 | 57 | 50 | 44 | 56 | 49 | 44 | 54 | 48 | 44 | 53 | 47 | 43 | 41 |
| 8 | 66 | 53 | 46 | 40 | 64 | 53 | 45 | 40 | 51 | 45 | 40 | 50 | 44 | 40 | 49 | 43 | 39 | 38 |
| 9 | 62 | 49 | 42 | 37 | 60 | 49 | 42 | 37 | 48 | 41 | 36 | 47 | 41 | 36 | 46 | 40 | 36 | 34 |
| 10 | 58 | 46 | 39 | 34 | 57 | 45 | 38 | 34 | 44 | 38 | 34 | 43 | 38 | 33 | 43 | 37 | 33 | 32 |

14-FPL1-LUGR-LED-3000L-4000L-5000L-DIM10-MVOLT-35K-40K-50K-85(5000L)

TEST NO.: **EL08292458**


INPUT WATTS: **38.4**

LUMENS: **4756**

EFFICACY: **124**

BEAM ANGLE: **80**

SPACING CRITERIA: **1.15**



CANDELA TABLE

| | 0° | 90° |
|-----|------|------|
| 0° | 2441 | 2441 |
| 10° | 2452 | 2376 |
| 20° | 2301 | 2170 |
| 30° | 1886 | 1814 |
| 40° | 1172 | 1343 |
| 50° | 614 | 882 |
| 60° | 389 | 419 |
| 70° | 234 | 231 |
| 80° | 111 | 136 |
| 90° | 2 | 3 |

LUMINANCE (cd/sq.m)

| | 0.00° | 90.00° |
|-------|-------|--------|
| 0.00° | 6568 | 6568 |
| 10° | 3127 | 4155 |
| 20° | 2292 | 2944 |
| 30° | 2026 | 1980 |
| 40° | 1822 | 1774 |
| 50° | 1899 | 2410 |

LUMENS PER ZONE

| ZONE | LUMENS |
|-----------|--------|
| 0° - 10° | 232 |
| 10° - 20° | 661 |
| 20° - 30° | 950 |
| 30° - 40° | 997 |
| 40° - 50° | 751 |
| 50° - 60° | 500 |
| 60° - 70° | 331 |
| 70° - 80° | 204 |
| 80° - 90° | 81 |

ZONAL LUMEN SUMMARY

| ZONE | UMENS | % LUMINAIRE |
|----------|-------|-------------|
| 0° - 20° | 893 | 19% |
| 0° - 30° | 1843 | 39% |
| 0° - 40° | 2840 | 60% |
| 0° - 60° | 4092 | 86% |
| 0° - 80° | 4626 | 97% |
| 0° - 90° | 4707 | 99% |

CONE OF LIGHT

| MOUNTING HEIGHT | FC AT BEAM CENTER | BEAM DIA. 0° -180° | BEAM DIA. 90° -270° |
|-----------------|-------------------|--------------------|---------------------|
| 6.0 ft | 67.8 fc | 10.0 ft | 10.8 ft |
| 8.0 ft | 38.1 fc | 13.3 ft | 14.4 ft |
| 10.0 ft | 24.4 fc | 16.7 ft | 18.1 ft |
| 12.0 ft | 16.9 fc | 20.0 ft | 21.7 ft |
| 14.0 ft | 12.5 fc | 23.3 ft | 25.3 ft |
| 16.0 ft | 9.5 fc | 26.7 ft | 28.9 ft |
| 18.0 ft | 7.5 fc | 30.0 ft | 32.5 ft |
| 20.0 ft | 6.1 fc | 33.3 ft | 36.1 ft |

INDOOR COEFFICIENTS OF UTILIZATION

| pf | 20% | | | | | | | | | | | | | | | | 0% | |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| | pc | 80% | | | | 70% | | | | 50% | | | | 30% | | | | 0% |
| pw | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 101 | 101 | 101 | 99 |
| 1 | 110 | 106 | 102 | 99 | 107 | 103 | 100 | 97 | 99 | 96 | 94 | 95 | 93 | 91 | 91 | 90 | 88 | 86 |
| 2 | 102 | 94 | 88 | 83 | 99 | 92 | 87 | 82 | 89 | 84 | 80 | 85 | 82 | 78 | 82 | 79 | 77 | 74 |
| 3 | 94 | 85 | 77 | 72 | 91 | 83 | 76 | 71 | 80 | 74 | 70 | 77 | 72 | 68 | 75 | 71 | 67 | 65 |
| 4 | 87 | 76 | 69 | 63 | 85 | 75 | 68 | 62 | 72 | 66 | 61 | 70 | 65 | 60 | 68 | 63 | 59 | 57 |
| 5 | 81 | 69 | 61 | 55 | 79 | 68 | 61 | 55 | 66 | 59 | 54 | 64 | 58 | 54 | 62 | 57 | 53 | 51 |
| 6 | 75 | 63 | 55 | 49 | 73 | 62 | 55 | 49 | 60 | 54 | 49 | 59 | 53 | 48 | 57 | 52 | 48 | 46 |
| 7 | 70 | 58 | 50 | 45 | 69 | 57 | 50 | 44 | 56 | 49 | 44 | 54 | 48 | 44 | 53 | 47 | 43 | 41 |
| 8 | 66 | 53 | 46 | 40 | 64 | 53 | 45 | 40 | 51 | 45 | 40 | 50 | 44 | 40 | 49 | 44 | 39 | 38 |
| 9 | 62 | 50 | 42 | 37 | 60 | 49 | 42 | 37 | 48 | 41 | 37 | 47 | 41 | 36 | 46 | 40 | 36 | 34 |
| 10 | 58 | 46 | 39 | 34 | 57 | 45 | 38 | 34 | 44 | 38 | 34 | 44 | 38 | 33 | 43 | 37 | 33 | 32 |

- 1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems
- 2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems
- 3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

| BRAND | EASYFIT by EnOcean | LUTRON | enlighted | LEVITON | OSRAM | PHILIPS EasySense | legrand® |
|---------------------------------------|---|--|---|--|--|--|---|
| CONTROL UNIT | <input type="checkbox"/> LEDRU LED Relay Zone Controller 0-10V <input type="checkbox"/> LEDDU LED Zone Controller 0-10V ¹ | <input type="checkbox"/> FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminaire is shipped Vive Enabled) ² <input type="checkbox"/> FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminaire is shipped Vive Enabled) ⁴ | <input type="checkbox"/> CU-4E-FMH Fixture Mount Control Unit ⁵ | <input type="checkbox"/> ZL027 -N0W Intellect Power Control Modul ⁶ <input type="checkbox"/> ZL027 -N0W Intellect Power Control Modul ⁶ | <input type="checkbox"/> EN-WCM2-ZB-DR Wireless Control Modul ⁷ <input type="checkbox"/> EN- ALC-ZB-BK-DR Wireless Area Lighting Control Modul ⁷ <input type="checkbox"/> ZBHA-CLM-DIM-ENC Connected Lighting Module DIM ⁷ | <input type="checkbox"/> SBR -BS Xitanium SR Bridge ⁸ | <input type="checkbox"/> LMFC-011 ON/OFF/0-10V dimming fixture controll ⁹ |
| INTEGRAT SENSOR | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| *WIRELESS OCCUPANCY SENSOR | <input type="checkbox"/> EOSCU-W-EO Occupancy Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³ | N/A | N/A | N/A | N/A | N/A | <input type="checkbox"/> LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ⁹ |
| *WIRELESS DAYLIGHT SENSOR | <input type="checkbox"/> ELLSU-W-EO Light Level Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³ | N/A | N/A | N/A | N/A | N/A | <input type="checkbox"/> LMLS-400 Single zone switching and dimming digital photosens ⁹ |
| *WIRELESS OCCUPANCY & DAYLIGHT SENSOR | N/A | N/A | <input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor <input type="checkbox"/> SU-5E-CL Connected Lighting Micro Sensor <input type="checkbox"/> SU-5E-IL Independent Lighting / Enlighted One Micro Sensor ⁸ <input type="checkbox"/> SU-5S-H (IoT/CL/IL) Surface Mount Sensor (Must be specified with CU-4E-FMH Control Unit) | <input type="checkbox"/> ZL00J -T0W Intellect Intelligent Fixture Control System ⁶ (Must be specified with ZL027 -N0W Control Unit) | <input type="checkbox"/> EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor <input type="checkbox"/> EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ⁷ (Must be specified with EN-WCM2-ZB-DR or EN-ALC-ZB-BK-DR Control Unit) | <input type="checkbox"/> SNS200-CMP SNS200 for grouping | N/A |
| ACCESSORIES | N/A | N/A | <input type="checkbox"/> TMC-SU-5E Tile Mount Carrier <input type="checkbox"/> CBL-5E-CU4-30N 30 inch Sensor Cable for CU-4 and IoT Ready™ drivers <input type="checkbox"/> CBL-5E-CU4-7F 7 foot Sensor Cable for CU-4 and IoT Ready™ drivers | N/A | N/A | N/A | N/A |
| NOTES | N/A | 4- Luminaire will be compatible with Lutron LRF2-OCR2B-P-WH Ceiling mount 360° occupancy/vacancy sensor & LRF2-DCRB-WH Ceiling-mount daylight sensor. Sensors must be ordered through Lutron. | 5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5S-H, Sensors. | 6-Luminaire will be compatible with Leviton Intellect App & Keypad Room Controller | 7-Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors | 8-Luminaire will be compatible with Philips field and wireless switch. | 9-Luminaire will be compatible with DLM Room control system LMPB-100. DLM control system must be order through Legrand. |