


MULTI-LUMEN
SELECTOR

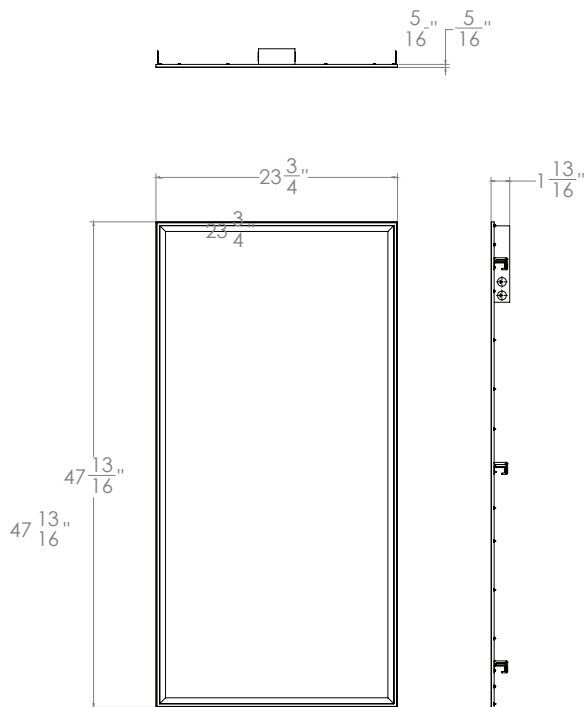

24-FPL1-LED-3000L-4000L-5000L-DIM10-MVOLT-40K-85

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
5000	5784	53 W
4000	4853	42 W
3000	4002	34 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

24-FPL1-LED-4000L-5000L-6000L-DIM10-MVOLT-40K-85

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
6000	6721	54 W
5000	5310	41 W
4000	4213	32 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

This fully luminous LED flat panel delivers exceptional performance and aesthetically pleasing optics, optimizing shallow plenum spaces. Perfect for new construction applications or retrofitting existing fluorescent troffer luminaires. It offers a range of dimming, lumen and CCT options. Perfect for either recessed or surface mounted installations, it's an ideal choice for commercial office space, retail merchandising, educational, and healthcare facilities.

LUMENS	3000/ 4000/ 5000 4000/ 5000/ 6000
CCT	30K, 35K, 40K, 50K
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x4', 2'x2', 1'x4'
MOUNTING	Recessed, Suspended, Surface Mount
DIMMING & CONTROL	0-10V Flicker Free 10% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L output (Bodine BSL310) 20W - Up to 2000L output (Bodine BSL20)
LIFETIME	L70 at 60,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The driver is removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The proprietary optical system utilizes a unique combination of reflective and refractive optical components to achieve a uniform, aesthetically pleasing appearance. Use of a guide plate laser allows high density pixels to shine, creating an even illumination with no glare, while maintaining a high efficiency.

CONSTRUCTION

Heavy duty 20-gauge cold rolled steel back panel and aluminum frame, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 10% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277V.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.
Listed for DLC, California Title 24 compliant.

Example: **24-FPL1-LED-3000/4000/5000L-DIM10-MVOLT-30K-85**

24	FPL1	LED							
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS
24 - 2' X 4'	FPL1 - LED Flat Panel	LED	3000/4000/5000L 4000/5000/6000L	DIM10 - 0-10V Dimming	MVOLT	30K 35K 40K 50K	85	0-EMG-LED-10W 0-EMG-LED-20W	24FK - 2'x4' Flange Kit 24-FPL1-LED-SMK - 2'x4' Surface Mount Kit FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance


24-FPL1-LED-3000L-4000L-5000L-DIM10-MVOLT-40K-85(3000L)

TEST NO.: **EL10021901**

INPUT WATTS: **34** LUMENS: **4002** CRI: **N/A** EFFICACY: **118** CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	470.23	11.70	11.70
0-30	1006.05	25.10	25.10
0-40	1664.91	41.60	41.60
0-60	3029.29	75.70	75.70
0-80	3873.38	96.80	96.80
0-90	3968.51	99.20	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1740	1736	1732
55	1725	1725	1724
65	1684	1689	1689
75	1569	1582	1579
85	1241	1277	1277

Lumens Per Zone

Zone	Lumens
0-10	121.12
10-20	349.11
20-30	535.82
30-40	658.86
40-50	703.66
50-60	660.72
60-70	525.36
70-80	318.73
80-90	95.13

Candela Tabulation

0	
0.0	1278.805
5.0	1280.660
15.0	1243.260
25.0	1168.920
35.0	1059.180
45.0	915.130
55.0	736.190
65.0	529.400
75.0	302.110
85.0	80.460
90.0	13.080

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%				70%				50%			30%			10%			0%
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
1	108	103	98	94	105	101	96	93	96	93	90	92	89	87	88	86	84	82	
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	77	73	70	67	
3	89	78	69	63	86	76	68	62	73	66	61	70	64	60	68	63	59	56	
4	81	69	60	53	79	67	59	52	65	57	51	62	56	51	60	54	50	48	
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41	
6	69	55	46	39	67	54	45	39	52	44	39	50	43	38	49	42	38	36	
7	64	50	41	34	62	49	40	34	47	40	34	46	39	34	44	38	33	31	
8	59	45	37	31	57	45	36	31	43	36	30	42	35	30	41	34	30	28	
9	55	42	33	27	54	41	33	27	40	32	27	38	32	27	37	31	27	25	
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23	

RC - Ceiling Cavity Reflectance RW - Wall Reflectance


24-FPL1-LED-3000L-4000L-5000L-DIM10-MVOLT-40K-85(4000L)

TEST NO.: **EL10021902**

INPUT WATTS: **42.1** LUMENS: **4853** CRI: **N/A** EFFICACY: **115** CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	571.42	11.80	11.80
0-30	1222.48	25.20	25.20
0-40	2022.77	41.70	41.70
0-60	3673.49	75.70	75.70
0-80	4696.7	96.80	96.80
0-90	4811.55	99.10	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2099	2085	2077
55	2090	2066	2057
65	2045	2007	1990
75	1908	1850	1844
85	1546	1437	1381

Lumens Per Zone

Zone	Lumens
0-10	147.20
10-20	424.22
20-30	651.06
30-40	800.29
40-50	851.98
50-60	798.74
60-70	637.65
70-80	385.56
80-90	114.85

Candela Tabulation

0	
0.0	1553.705
5.0	1545.970
15.0	1499.700
25.0	1408.690
35.0	1276.000
45.0	1104.220
55.0	891.830
65.0	642.960
75.0	367.360
85.0	100.210
90.0	17.960

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%				70%				50%			30%			10%			0%
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
1	108	103	98	94	105	101	97	93	96	93	90	92	89	87	88	86	84	82	
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	77	73	70	67	
3	89	78	69	63	86	76	68	62	73	66	61	70	64	60	68	63	59	56	
4	81	69	60	53	79	67	59	52	65	57	51	62	56	51	60	54	50	48	
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41	
6	69	55	46	39	67	54	45	39	52	44	39	50	43	38	49	43	38	36	
7	64	50	41	35	62	49	40	34	47	40	34	46	39	34	44	38	33	31	
8	59	45	37	31	57	45	36	31	43	36	30	42	35	30	41	34	30	28	
9	55	42	33	28	54	41	33	27	40	32	27	39	32	27	37	31	27	25	
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	23	

RC - Ceiling Cavity Reflectance RW - Wall Reflectance


24-FPL1-LED-3000L-4000L-5000L-DIM10-MVOLT-40K-85(5000L)

TEST NO.: **EL10021903**

INPUT WATTS: **53** LUMENS: **5784** CRI: **N/A** EFFICACY: **109** CCT: **4000K**

SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	681.94	11.80	11.80
0-30	1458.87	25.20	25.20
0-40	2413.73	41.70	41.70
0-60	4378.91	75.70	75.70
0-80	5597.77	96.80	96.80
0-90	5734.8	99.10	99.10

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2479	2500	2521
55	2456	2482	2512
65	2376	2417	2449
75	2178	2226	2248
85	1658	1776	1809

Lumens Per Zone

Zone	Lumens
0-10	175.69
10-20	506.25
20-30	776.93
30-40	954.86
40-50	1016.37
50-60	948.81
60-70	759.76
70-80	459.10
80-90	137.03

Candela Tabulation

0	
0.0	1854.937
5.0	1846.670
15.0	1789.730
25.0	1677.160
35.0	1515.520
45.0	1303.840
55.0	1048.010
65.0	747.140
75.0	419.400
85.0	107.520
90.0	15.890

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%				70%				50%			30%			10%			0%
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
1	108	103	98	94	105	101	97	93	96	93	90	92	89	87	88	86	84	82	
2	98	89	82	76	95	87	81	75	83	78	73	80	75	71	77	73	70	67	
3	89	78	69	63	86	76	68	62	73	66	61	70	65	60	68	63	59	56	
4	81	69	60	53	79	67	59	52	65	57	51	62	56	51	60	54	50	48	
5	74	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41	
6	69	55	46	39	67	54	45	39	52	44	39	50	43	38	49	43	38	36	
7	64	50	41	35	62	49	40	34	47	40	34	46	39	34	44	38	33	31	
8	59	45	37	31	58	45	36	31	43	36	30	42	35	30	41	34	30	28	
9	55	42	33	28	54	41	33	27	40	32	27	39	32	27	37	31	27	25	
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23	


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

24-FPL1-LED-4000L-5000L-6000L-DIM10-MVOLT-40K-85(4000L)

TEST NO.: **EL06042018**

INPUT WATTS: **32.2** LUMENS: **4213** CRI: **N/A** EFFICACY: **131** CCT: **4000K** SPACING CRITERIA: **1.42**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	512.71	12.20	12.20
0-30	1093.92	26.00	26.00
0-40	1803.11	42.80	42.80
0-60	3243.82	77.00	77.00
0-80	4095.14	97.20	97.20
0-90	4178.42	99.20	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average		
	Average 0°	Average 45°	Average 90°
45	1813	1821	1843
55	1772	1777	1799
65	1691	1686	1701
75	1509	1488	1493
85	1019	984	978

Lumens Per Zone

Zone	Lumens
0-10	132.30
10-20	380.41
20-30	581.21
30-40	709.19
40-50	747.58
50-60	693.13
60-70	538.61
70-80	312.71
80-90	83.28

Candela Tabulation

0	
0.0	1397.046
5.0	1389.410
15.0	1340.410
25.0	1248.980
35.0	1118.340
45.0	953.780
55.0	755.900
65.0	531.710
75.0	290.570
85.0	66.080
90.0	6.900

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%			70%				50%			30%			10%			0%
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	97	93	90	93	90	87	89	87	85	82
2	98	90	83	77	95	88	81	76	84	79	74	81	76	72	78	74	70	68
3	89	79	70	64	87	77	69	63	74	67	62	71	65	61	68	63	59	57
4	82	69	60	54	79	68	60	53	65	58	52	63	57	52	61	55	51	49
5	75	62	53	46	73	61	52	46	58	51	45	56	50	45	54	49	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	39	36
7	64	50	41	35	62	49	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	30	29
9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32	27	26
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29	25	23


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

24-FPL1-LED-4000L-5000L-6000L-DIM10-MVOLT-40K-85(5000L)

TEST NO.: **EL06042019**

INPUT WATTS: **41.2** LUMENS: **5310** CRI: **N/A** EFFICACY: **129** CCT: **4000K** SPACING CRITERIA: **1.40**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	647.38	12.20	12.20
0-30	1381.24	26.00	26.00
0-40	2276.61	42.90	42.90
0-60	4088.3	77.00	77.00
0-80	5161.46	97.20	97.20
0-90	5266.11	99.20	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average		
	Average 0°	Average 45°	Average 90°
45	2282	2293	2328
55	2230	2234	2268
65	2126	2113	2145
75	1885	1851	1871
85	1254	1198	1222

Lumens Per Zone

Zone	Lumens
0-10	167.06
10-20	480.32
20-30	733.87
30-40	895.37
40-50	942.83
50-60	868.85
60-70	679.61
70-80	393.55
80-90	104.65

Candela Tabulation

0	
0.0	1764.554
5.0	1754.460
15.0	1691.250
25.0	1574.550
35.0	1409.620
45.0	1200.300
55.0	951.430
65.0	688.270
75.0	363.010
85.0	81.300
90.0	8.150

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%			70%				50%			30%			10%			0%
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	97	93	90	93	90	87	89	87	85	82
2	98	90	83	77	95	88	81	76	84	79	74	81	76	72	78	74	70	68
3	89	79	70	64	87	77	69	63	74	67	62	71	65	61	68	63	59	57
4	82	69	61	54	79	68	60	53	65	58	52	63	57	52	61	55	51	49
5	75	62	53	46	73	61	52	46	58	51	45	56	50	45	54	49	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	39	36
7	64	50	41	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	26
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29	25	23


RC - Ceiling Cavity Reflectance RW - Wall Reflectance

24-FPL1-LED-4000L-5000L-6000L-DIM10-MVOLT-40K-85(6000L)

TEST NO.: **EL06042020**

INPUT WATTS: **54.3** LUMENS: **6721** CRI: **N/A** EFFICACY: **124** CCT: **4000K** SPACING CRITERIA: **1.40**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	820.23	12.20	12.20
0-30	1750.03	26.00	26.00
0-40	2884.43	42.90	42.90
0-60	5178.01	77.00	77.00
0-80	6533.51	97.20	97.20
0-90	6665.99	99.20	99.20

Luminance (Average candela/M²)

Angle in Degrees	Average		
	Average 0°	Average 45°	Average 90°
45	2890	2901	2949
55	2824	2831	2879
65	2689	2677	2715
75	2365	2319	2361
85	1580	1514	1551

Lumens Per Zone

Zone	Lumens
0-10	211.67
10-20	608.56
20-30	929.80
30-40	1134.41
40-50	1194.73
50-60	1098.84
60-70	857.51
70-80	498.00
80-90	132.48

Candela Tabulation

0	
0.0	2235.772
5.0	2224.430
15.0	2142.520
25.0	1996.160
35.0	1786.460
45.0	1520.340
55.0	1204.900
65.0	845.430
75.0	455.350
85.0	102.470
90.0	10.410

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

ROOM CAVITY RATIO	RC RW	80%			70%				50%			30%			10%			0%
		70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	97	93	90	93	90	87	89	87	85	83
2	98	90	83	77	96	88	81	76	84	79	74	81	76	72	78	74	71	68
3	89	79	70	64	87	77	69	63	74	67	62	71	65	61	68	64	59	57
4	82	69	61	54	79	68	60	53	65	58	52	63	57	52	61	55	51	49
5	75	62	53	46	73	61	52	46	59	51	45	56	50	45	54	49	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	39	36
7	64	50	42	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	28	26
10	52	39	31	26	51	38	31	25	37	30	25	36	30	25	35	29	25	23

RC - Ceiling Cavity Reflectance RW - Wall Reflectance

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	<input type="checkbox"/> LEDRU LED Relay Zone Controller 0-10V ¹ <input type="checkbox"/> LEDDU LED Zone Controller 0-10V ¹	<input type="checkbox"/> FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminaire is shipped Vive Enabled) ^{1 4} <input type="checkbox"/> FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminaire is shipped Vive Enabled) ^{1 4}	<input type="checkbox"/> CU-4E-FMH Fixture Mount Control Unit ^{1 5}	<input type="checkbox"/> ZL027 –NOW Intellect Power Control Module ^{1 6} <input type="checkbox"/> ZL027 –NOW Intellect Power Control Module ^{1 6}	<input type="checkbox"/> EN-WCM2-ZB-DR Wireless Control Module ^{1 7} <input type="checkbox"/> EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1 7} <input type="checkbox"/> ZBHA-CLM-DIM-ENC Connected Lighting Module DIM ^{1 7}	<input type="checkbox"/> SBR -BS Xitanium SR Bridge ^{1 8}	<input type="checkbox"/> LMFC-011 ON/OFF/0-10V dimming fixture controller ^{1 9}
INTEGRAT SENSOR	N/A	N/A	N/A	N/A	N/A	N/A	N/A
*WIRELESS OCCUPANCY SENSOR	<input type="checkbox"/> EOSCU-W-E0 Occupancy Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³	N/A	N/A	N/A	N/A	N/A	<input type="checkbox"/> LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	<input type="checkbox"/> ELLSU-W-E0 Light Level Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³	N/A	N/A	N/A	N/A	N/A	<input type="checkbox"/> LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor ³ <input type="checkbox"/> SU-5E-CL Connected Lighting Micro Sensor ³ <input type="checkbox"/> SU-5E-IL Independent Lighting / Enlighted One Micro Sensor ³ <input type="checkbox"/> SU-5S-H-(IoT/CL/IL) Surface Mount Sensor ³ (Must be specified with CU-4E-FMH Control Unit)	<input type="checkbox"/> ZL00J -TOW Intellect Intelligent Fixture Control System ³ (Must be specified with ZL027 –NOW Control Unit)	<input type="checkbox"/> EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor <input type="checkbox"/> EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³ (Must be specified with EN-WCM2-ZB-DR or EN-ALC-ZB-BK-DR Control Unit)	<input type="checkbox"/> SNS200-CMP SNS200 for grouping ³	N/A
ACCESSORIES	N/A	N/A	<input type="checkbox"/> TMC-SU-5E Tile Mount Carrier <input type="checkbox"/> CBL-5E-CU4-30N 30 inch Sensor Cable for CU-4 and IoT Ready™ drivers <input type="checkbox"/> CBL-5E-CU4-7F 7 foot Sensor Cable for CU-4 and IoT Ready™ drivers	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with Lutron LRF2-OCR2B-P-WH Ceiling mount 360° occupancy/vacancy sensor & LRF2-DCRB-WH Ceiling-mount daylight sensor. Sensors must be ordered through Lutron.	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5S-H, Sensors.	6-Luminaire will be compatible with Leviton Intellect App & Keypad Room Controller	7-Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors	8-Luminaire will be compatible with Philips field and wireless switch.	9-Luminaire will be compatible with DLM Room control system LMPB-100. DLM control system must be ordered through Legrand.