



**SUGGESTED USE**

For areas where smooth and wide light distribution is needed. Ideal for building facades, security, recreation facilities, parking lots, signs, and displays.

**CONSTRUCTION**

Die-cast aluminum corrosion-proof housing. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber.

**FINISH** - Dark bronze corrosion-resistant polyester powder finish is standard.

**LENS** - Clear, heat- and impact-resistant tempered glass lens.


**INSTALLATION** - Fixtures offer an adjustable knuckle with 1/2" NPT threads for easy mounting to boxes or adapters. Bottom feed wiring.

**LAMP** - T5/T5HO Fluorescent and LED.

All specifications are subject to change without notice



**Dimensions:**

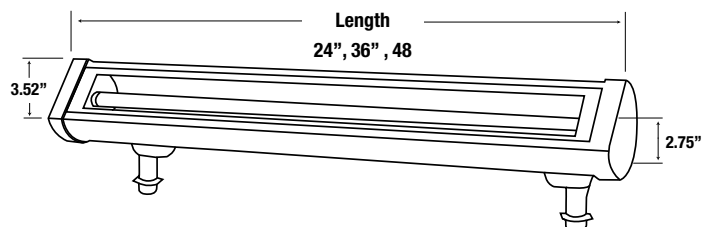

**Ordering Guide > Example: 2-OWG-LED-18W-MVOLT-BZ**

2	OWG				
FIXTURE SIZE	SERIES	LAMP TYPE/WATTAGE	VOLTAGE	COLOR	OPTION
2 - 2'	OWG - Oracle Wall Glazer	LED	MVOLT	BZ - Bronze	LV-56 - Ground mounting spike
3 - 3'		2' FIXTURE			
4 - 4'		LED-18W - 18W - LED			
		4' FIXTURE			
		LED-37W - 37W - LED			
		CFL			
		2' FIXTURE			
		1-14-T5 - 14W - T5			
		1-24-T5HO - 24W - T5HO			
		3' FIXTURE			
		1-21-T5 - 21W - T5			
		4' FIXTURE			
		1-28-T5HO - 28W - T5HO			