INTELLICAST

LED Architectural Linear Strip

4'

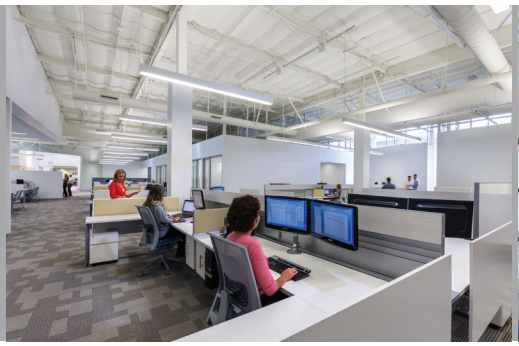

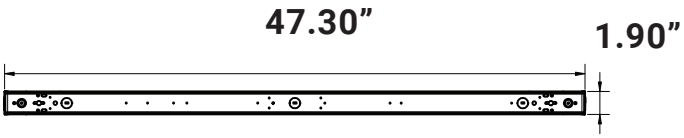

Nominal Lumens	Delivered Lumens	Wattage
6000	5940	45W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

The compact OEC-BLE-MS makes it an ideal choice for size-restricted architectural applications.Thanks to the new design of the optical lens integrating module, OEC-BLE-MS is faster and easier when row mounting during on-site installation of sensors. This distinct luminaire is a perfect solution for educational, healthcare, office, commercial, and retail spaces.

LUMENS	Wireless Adjustable up to 6000L
CCT	Wireless Selectable 30K, 35K, 40K, 50K
CRI	85+ (Standard)
COLOR QUALITY	3-Step MacAdam Ellipse
LENGTHS	4’
MOUNTING	Surface, Pendant, Suspended
DIMMING & CONTROL	Wireless Bluetooth Mesh Lighting Control
EMERGENCY	10W - Up to 1500L output, 20W - Up to 3000L output
LIFETIME	L70 at 60,000 Hours
OPERATING TEMPERATURE	-20° C to 50° C Ambient Temperature
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.

OPTICS & PERFORMANCE
Optical system delivers high-efficiency LED light that passes through a premium quality, frosted extruded lens for a smooth, general distribution.

CONSTRUCTION
The slim body is constructed of heavy-duty 20-gauge cold-rolled steel, with a frosted extruded lens.

INSTALLATION
Faster wiring and installation without removing the lens and module board.

DRIVER ELECTRICAL INFORMATION
Powered by constant-current LED drivers that are rated 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and female 18-gauge 6 wire plug connectors are included with every luminaire to allow for hassle-free, continuous wiring. Each luminaire must be installed male-to-female.

SCAN TO DOWNLOAD THE APP

GET IT ON Google Play

Download on the App Store

DIMMING AND CONTROL
2.4GHz wireless mesh technology with AES 128-bit encryption lighting control can connect 100 devices per group. With max distance of 98 feet in line barriers or corners. Luminaires work with wireless or embedded switch. System control is achieved by a Bluetooth mesh network, thus no need for Routers and Gateways. Luminaires can be shipped pre-installed with daylight harvesting controls, occupancy sensors, and/or power packs for individual or room lighting control.

Bluetooth Mesh
The system control is achieved by a Bluetooth mesh network, eliminating the need for routers and gateways.

Energy-Saving
Light output is automatically set by the system based on the user's requirement.

Comfort
Light output will automatically change based on the variation of indoor light luminance.

Convenience
Illumination mode can be achieved with a push of a button.

CONTROL AND SENSOR
Luminaires are shipped with pre-installed daylight harvesting controls and occupancy sensors for individual or room lighting control.

WARRANTY
Five-year warranty for parts and components. Labor not included.

LISTINGS
c-UL-us - Listed for Feed Through Wiring.
UL 8750 LED equipment in Lighting Products
All LED luminaires are rated and tested to LM-79 and LM-80 standards by Elite Lighting. Listed for DLC, California Title 24 compliant.

EXAMPLE: **4-OEC-BLE-MS-LED-3000L-MVOLT-30K/35K/40K/50K-85**

FIXTURE SIZE	SERIES	TYPE	LUMENS	VOLTAGE	CCT	CRI	FINISH	EMERGENCY	MOUNTING	WIRING	OTHER	ACCESSORIES
4'	OEC-LED	BLE-MS-LED	6000L	MVOLT	30/35/40/50K	85	WH/BK/SI	O-EMG-LED-10W	SURFACE PENDANT SUSPENDED	FBF/SBF/RIS	OTHER OPTIONS	ACCESSORIES
	General Linear						**WH**-White (Standard) **BK**-Black **SI**-Silver Consult Factory for Custom Colors	O-EMG-LED-10W O-EMG-LED-20W		**FBF** Internal Fast BlowFuse **SBF** Internal Slow BlowFuse **RIS** Radio Interference	**OCGSS** Cable Gripper Suspension Kit **OCVH** V Hook	IntelliCast Face Plates IC-BLE-SW3-MVOLT-WH (IntelliCast Technology Wireless Battery Powered 3 Button Switch) IC-BLE-SW5-MVOLT-WH (IntelliCast Technology Wireless Battery Powered 5 Button Switch) IC-BLE-SW7-MVOLT-WH (IntelliCast Technology Retrofit 7 Button Switch) IntelliCast Zone Controller

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.

THE APP

The IntelliCast app by Elite Lighting allows validated end users (electrical contractors, sales agents, or facility maintenance professionals) to startup, configure, and troubleshoot wirelessly from a compatible smart phone or tablet.

The mobile app is optimized for efficient on-site startup and maintenance. It allows end-users to easily modify the settings and operation of fixtures, sensors, and wall switches in a group to meet energy code requirements. For larger installations, multiple users may use the mobile app simultaneously to reduce on-site time.

BENEFITS

- Complete control for applications using this room-based system
- Bluetooth-enabled app for iOS and Android devices
- Auto configuration and plug-n-play connectivity for simplified installation
- Intuitive interface and user-friendly wall stations for precise control

MAKE COMMISSIONING OF YOUR LIGHTING EASY

Add Luminaires

- Add/ Delete
- Individual Dimming
- CCT Adjustable
- 100 Luminaires per Group, 30 Groups Max

Create Groups

- Select Individual Lights
- Add to Group
- Link Groups
- Delete Groups
- Group Settings
  - Auto Settings
  - Motion Sensor
  - Daylight Harvesting
  - Time Delay
  - Program Presets

Switches

- Pair App to Switch
- Three Types of Switches
- Switch will Provide Options

Scenes

- Create / Edit Scenes
- Modify Presets

QR Codes

- Gain Admin Access
- Gain User Access
- Share Codes

More Settings

- Create Schedules
- Find QR Codes
- Circadian Rhythm Settings
- Luminaire Information
- Converter & Sensor Info
- Nearby Lights
- Function Testing
- Auto Calibration
- Trim Settings
- Bluetooth Radio Settings
- App Version Info

Due to the changes of constant improvement in LED technology, all details are subject to change without notice. Consult factory for up to date information.