




MULTI-LUMEN
SELECTOR

EASY 3 COLORS
SELECTOR
3000K • 4000K • 5000K

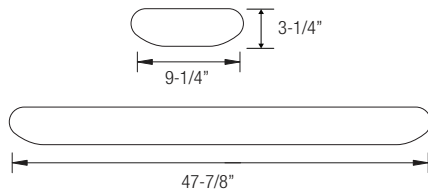

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
5000	5057	37 W
4000	3937	27 W
3000	3130	21 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES:

- Manufactured in heavy-gauge steel for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial, industrial and residential spaces requiring general illumination
- Suitable for dry and damp environments
- Lightweight design enables for quick, easy installation

LUMENS	3000/4000/5000
CCT	30K/40K/50K
CRI	90+
COLOR QUALITY	3 Step MacAdam Ellipse
LENGTH	4'
MOUNTING	Suspended or Surface
DIMMING & CONTROL	0-10V Flicker Free 10% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L output
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS - The OSC-LED uses a frosted acrylic lens to scatter the light emitted from the LED chips into functional light. The LED offered in the OSC-LED has the highest return on initial investment compared to other standard lighting solutions.

PERFORMANCE - The light engines found in the OSC are rated at 90+ CRI and are available in multiple selectable CCTs: 3000K/4000K/5000K. Multi-lumen selector also available: 3000/4000/5000 lumens. Rated and tested to LM-79 and LM-80 standards. The LEDs are also binned to a 3-step MacAdam ellipses to achieve consistent color from fixture to fixture.

ELECTRICAL - Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120 or 120-277V input (MVOLT), produce less than 20% THD, and have a power factor of .90 to 1.00.

QUALITY CONTROL - Every fixture is turned on and rigorously tested by our QC Department before shipping.

LENS - White acrylic diffuse lens

INSTALLATION - Fixture easily mounts directly over a 4" recessed outlet box, and most standard size junction boxes.

WARRANTY - Limited 5 Year Warranty

LISTING - c-UL-us - Listed for Feed Through Wiring., Listed for DLC, California Title 24 compliant.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications are subject to change without notice.

Example: **4-OSC-LED-3000L/4000L/5000L-DIM10-MVOLT-30K/40K/50K-90**

4	OSC	LED						
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY
4 - 4'	OSC - LED General Linear	LED	3000L/4000L/5000L	DIM10 - 0-10V Dimming	MVOLT	30K40K/50K	90	0-EMG-LED-10W