

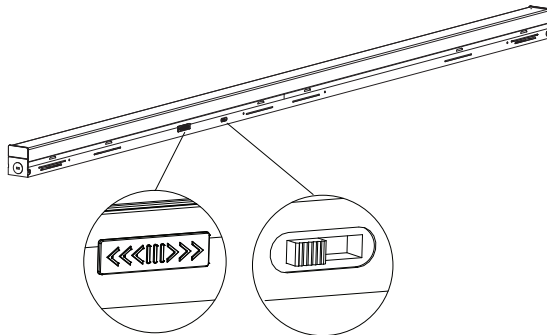




**MULTI-LUMEN
SELECTOR**

**EASY 3 COLORS
SELECTOR**
3500K • 4000K • 5000K



Wattage Switch

CCT Switch

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
8000	7980	60W
7000	7015	53W
6000	6220	46W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

LEDs: Long-life, high-efficacy, micro-power LEDs

Lifespan: Lumen Maintenance, L70 > 100,000 hours

Dimming Driver: Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

Housing: Sheet metal stamping

Operating temp range -20°C/-4°F to 50°C /122°F

Finish: Long lasting white with high durability

Mounting: Surface mounting ready.

Listing:

c-UL-us - Listed for Feed Through Wiring.

c-UL-us - Listed for Damp Location.

Listed for DLC, California Title 24 compliant.

LUMENS	6000/7000/8000
CCT	35K/40K/50K
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
LENGTH	2', 4' or 8'
MOUNTING	Surface
DIMMING & CONTROL	0-10V Flicker Free 10% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L output
LIFETIME	L70 at 100,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

Example: **4-OEC4-LED-6000L/7000L/8000L-DIM10-MVOLT-35K/40K/50K-85**

4	OEC4	LED						
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY
4 - 4'	OEC4 - LED General Linear	LED	6000L/7000L/8000L	DIM10 - 0-10V Dimming	MVOLT	35K/40K/50K	85	0-EMG-LED-10W

