


T8 LOW PROFILE FLUORESCENT STAGGERED COVE LUMINAIRE (1 LAMP T8)

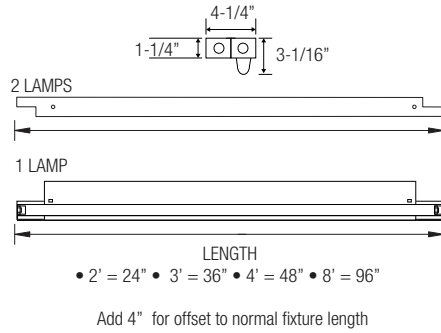

APPLICATION:

Staggered lamp fixtures are designed for use in cove, recessed slot, or luminous ceiling applications. Staggering the lamps provides for uniform illumination that eliminates shadows and/or hot spots: • Lobbies • Restaurants • Restrooms • Office buildings • Hallways • Airports • Retail spaces • Conference rooms

PRODUCT FEATURES:

- Combine various fixture lengths for row configurations
- Fixture channel is offset in order to provide smooth illumination without shadowing
- Die-formed, code-gauge, cold-rolled steel
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Shallow design is ideal for commercial spaces requiring cove illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Individual or continuous row mounting
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

T8
OSTG

Ordering Information > Example: 8-OSTG-1-32-T8-MVOLT-EMG-T8-BX-700

8	OSTG	1							
FIXTURE SIZE	SERIES	LAMPS	WATTAGE	VOLTAGE ¹	# OF BALLAST	BALLAST FACTOR			
8- 8'	OSTG-Oracle Staggered Strip	1	8' FIXTURE (2-LAMP STANDARD) 32-T8 (32W/T8)	(Blank)- MVOLT (120/277) 120 277 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF			

BALLAST CONFIGURATION & CODE	
32W/T8	DESCRIPTION
(Blank)	Electronic Instant Start
EPS	Electronic Program Start
ADV-7	Advance Mark-7 ¹
ADV-10	Advance Mark-10 ¹
-	Advance Optanium ¹
ADV-ESS	Advance Essential ¹
ADV-ROVR	Advance Rover ¹
LUT-EHD	Lutron Ecosystem H-Series ¹
LUT-2W	Lutron Tu-Wire ¹
LUT-EC5	Lutron Ecosystem ¹
LUT-EC3	Lutron Eco-10 ¹
LUT-TVE	Lutron Tve ¹
LUT-H3D	Lutron Hi-Lume 3D ¹
-	Lutron Ecosystem (347V Only) ¹

¹- Voltage must be specified for dimming ballast.

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

WIRING OPTIONS	
C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS	
USA	- Made in America Compliance

REFLECTOR OPTIONS	
Refer to page 275	

8' Low Profile Fluorescent Staggered