

**FEATURES**

Introducing our **Decorative Aurora LED Pendant**, the pinnacle of high-performance suspended fixtures designed to emanate a seamlessly distributed luminous glow.

Available in **two different sizes and offering a suspended mount option**, Aurora LED Pendant is a testament to modern aesthetics and high-quality materials. The flexible **silicone diffuser** and premium **aluminum body** ensure captivating elegance and appearance.

Choose from **two captivating colors – Black or White** – or select from a range of RAL colors to seamlessly complement any interior style. With the **Decorative Aurora LED Pendant**, you are not just adding light; you are elevating your space with **style and advanced technology**, transforming mere lighting into an artful experience.

**COLORS**



Black





White



Custom RAL

**DIMENSIONS**

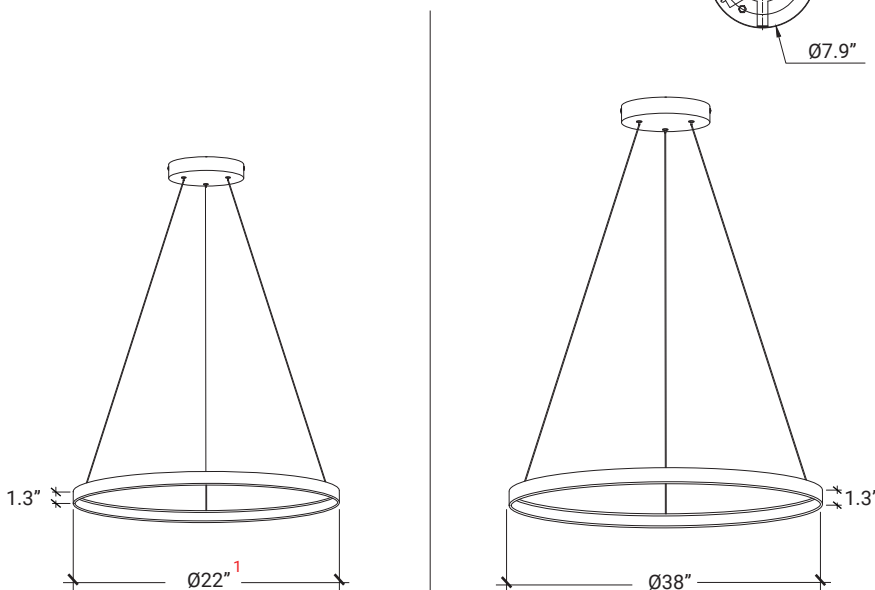

<b>LUMENS</b>	3000L, 6000L
<b>CCT</b>	3000K/3500K/4000K
<b>CRI</b>	90+
<b>COLOR QUALITY</b>	2 Step MacAdam Ellipses
<b>POWER</b>	50W, 80W
<b>RING SIZE</b>	Ø22", Ø38"
<b>MOUNTING</b>	Suspended Mount (Adjustable 10-ft length cords)
<b>IP RATING</b>	IP20-Dry or damp locations
<b>COLOR</b>	Black, White, Custom RAL
<b>DIMMING</b>	DIMTR (TRIAC), DIM10 (0-10V)
<b>REMOTE EMERGENCY</b>	EMG-LED-16W, EMG-LED-25W,
<b>LIFE TIME</b>	L70 at 50,000 hours
<b>PHOTOMETRIC TESTS</b>	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

SIZE	LUMENS	WATTS
Ø22"	3000L	50W
Ø38"	6000L	80W

1. Luminaire with a diameter of 22" comes with a Ø 7.1" canopy.



Due to the changes of constant improvement in LED technology, all details are subject to change **without notice**. Consult factory for **up to date information**.

**OPTICS & PERFORMANCE**

The optical system delivers high-efficiency LED light that passes through a one-piece, high-quality silicone lens, ensuring optimal distribution patterns. This design creates a glare-free and even distribution of light. The ingenious technology minimizes glare and eradicates any hot spots, providing unrivaled light control.

The one-piece diffuser disperses light evenly in every direction. As a result, it produces a seamless and ambient glow, transforming your environment into a captivating haven of illumination.

**CONSTRUCTION**

The aluminum body integrated with a one-piece silicone diffuser creates a strikingly contemporary design. This luminaire, constructed with premium silicone and high-quality aluminum materials, showcases modern aesthetics and durability.

Engineered to perfection, our cutting-edge lighting solution includes essential features such as 10ft adjustable aircraft cables and an integral driver for effortless installation and impeccable performance. With its seamless fusion of form and function, this LED masterpiece delivers unparalleled illumination, creating an ambiance of refined elegance and technical excellence that complements any modern setting.

**MOUNTING**

Suspended Mount. Delivered with adjustable 10-ft cords, the pendant mount provides flexibility for a seamless installation. Engineered to accommodate different ceiling types and mounting heights, it adapts to a variety of spaces with a minimum suspension of 5" from ceiling to top of fixture.

For added convenience, our canopy can be directly mounted to the junction box, facilitating below-ceiling access for easy maintenance and servicing.

**ELECTRICAL**

Driver is rated for 50 to 60Hz at 120V input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

**DIMMING & DRIVER INFORMATION**

**DIMTR** - Triac & Electronic low voltage dimming. Available in 120V  
**DIM10** Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277V.

**WARRANTY**

Five-year warranty for parts and components. (Labor not included)

**LISTINGS**

**cETLus** - Listed

Example: AP-AURORA-LED-22-3000L-DIMTR/120-DIM10/MVOLT-30K/35K/40K-90-WH-SM

SERIES	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CCT	CRI	COLOR	EMERGENCY	MOUNTING
AP-AURORA-LED	22 - Ø22.8" 38 - Ø38.5"	3000L - 3000L 6000L - 6000L	DIMTR/120-DIM10/MVOLT Triac Dimming 120V/0-10V Dimmable in 120-277V	30K/35K/40K - 3000K-3500K-4000K	90 - 90+	WH - White BK - Black RAL - Consult factory	0-EMG-LED-16W-HV 0-EMG-LED-25W-HV Remote Mount Please consult factory.	SM - Suspended Mount