



LUMENS	3000L, 4000L, 6500L	RING SIZE	Ø 25", Ø 33", Ø 41"
CCT & TECHNOLOGIES	3000K, 3500K, 4000K	MOUNTING	Suspended Mount (Adjustable 10-ft length cords)
CRI	90+	IP RATING	IP20-Dry or damp locations
COLOR QUALITY	2 Step MacAdam Ellipse	FIXTURE FINISH	BK (Black), WH (Matt White), Custom RAL
POWER	50W, 60W, 80W	MATERIAL COLORS	Refer to SoftSense Material Color Chart
DIMMING & CONTROLS	DIMTR (TRIAC), DIM10(0-10V)	PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM-80, TM-30, TM-21

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

The **Flat** features an organic rounded triangle shaped acoustic panel filling the luminaire, which softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space.



02.11.26

ACOUSTIC MATERIAL - 9mm / 0.35" Thickness

Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

ACOUSTIC CONSTRUCTION

The metal frame is positioned atop the ring fixture, securely sandwiched between two layers of our acoustic panels. This design ensures a durable structure that resists sagging over time while enhancing noise absorption due to the increased material thickness.

ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels


Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75
Weighted Sound Absorption Coefficient - $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

MAINTENANCE

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

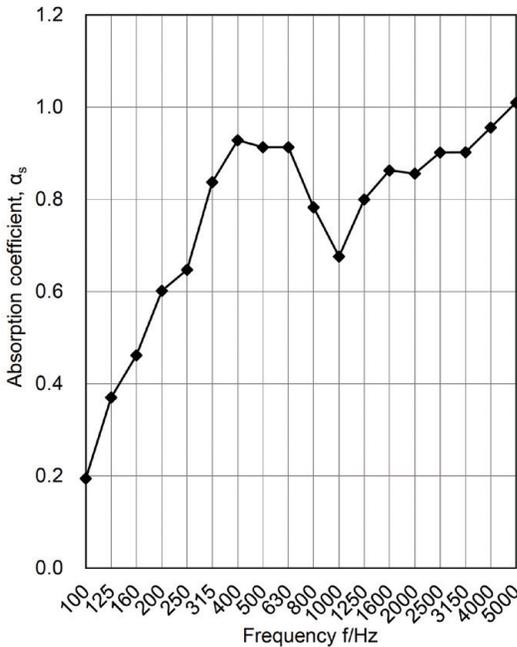

OPTICS & PERFORMANCE

The Harmony round triangular LED Suspended Inner Luminaire is a high-performance lighting solution designed to enhance any space with its sleek design and uninterrupted, even glow

LUMINAIRE CONSTRUCTION

Built as one continuous, 2" extruded aluminum piece with a matching seamless, flexible PC diffuser lens, this luminaire ensures both ease of installation and a minimalist, elegant charm.

LUMEN DISTRIBUTION

The driver and CCT switch are located inside the canopy.

MOUNTING / SUSPENSION

The fixture includes a central canopy mounting as the standard configuration. For side canopy mounting, field modification is required. The luminaire is supplied with three 11' suspension cables, one central canopy, one wire holder, and one side canopy.

WARRANTY

Limited five-year warranty.

LISTINGS

IP40
L80B20 at 50,000 hours
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.
cETLus Listed. Suitable for Dry Locations.

LUMEN DETAILS

Based on 4000K, 90+ CRI.
Actual wattage may vary +/- 5%

DIRECT		
LUMINAIRE SIZE	LUMENS	WATTS
Ø 25"	3000	50
Ø 33"	4000	60
Ø 41"	6500	80

Example: AP-HARMONY-RHAPSODY-SOFT-FLAT-25IN-3000L-DIMTR/120-DIM10/MVOLT-30K/35K/40K-90-WH-SM-GRN

										GRN
SERIES	SIZE	LUMENS	DIMMING/VOLTAGE		CRI	COLOR	EMERGENCY	MOUNTING	ACOUSTIC COLOR	
AP-HARMONY-RHAPSODY-SOFT	25IN - 25.5"x24.8" 33IN - 33.4"x32.7" 41IN - 41.3"x40.7"	3000L - 3000L 4000L - 4000L 6500L - 6500L	DIMTR/120-DIM10/MVOLT <small>Triac Dimming 120V/0-10V Dimmable in 120-277V</small>		90 - 90+	WH - White BK - Black RAL - Consult factory	0-EMG-LED-16W-HV 0-EMG-LED-25W-HV Remote Mount Please consult factory.	SM - Suspended Mount	Refer to SoftSense material color chart for options example: GRN - Green	
STYLE					CCT					
FLAT-Flat					30K/35K/40K - 3000K-3500K-4000K					


SIZE OPTIONS



25"




33"

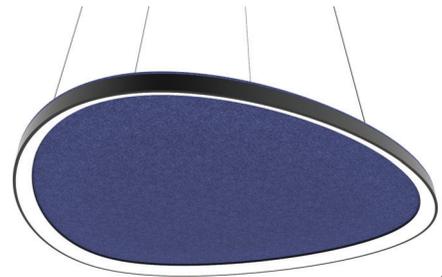


41"

DIMENSIONS

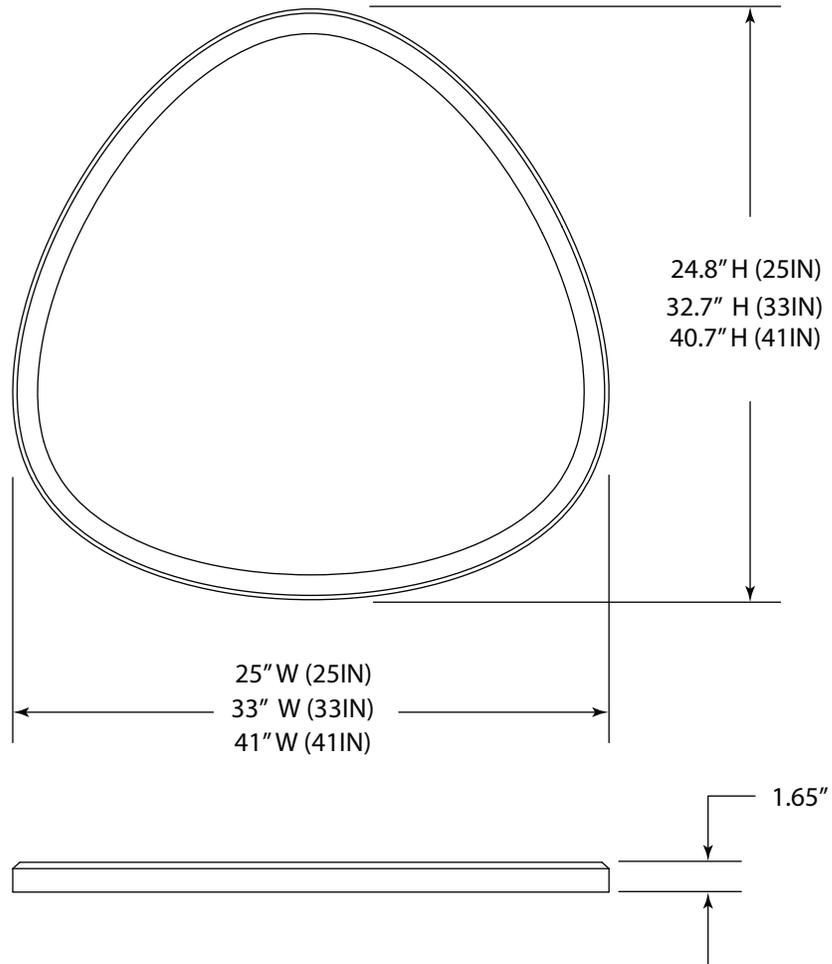

MOUNTING OPTIONS

The fixture comes with a central canopy mounting as standard for all sizes. If side canopy mounting is desired, it must be modified in the field.

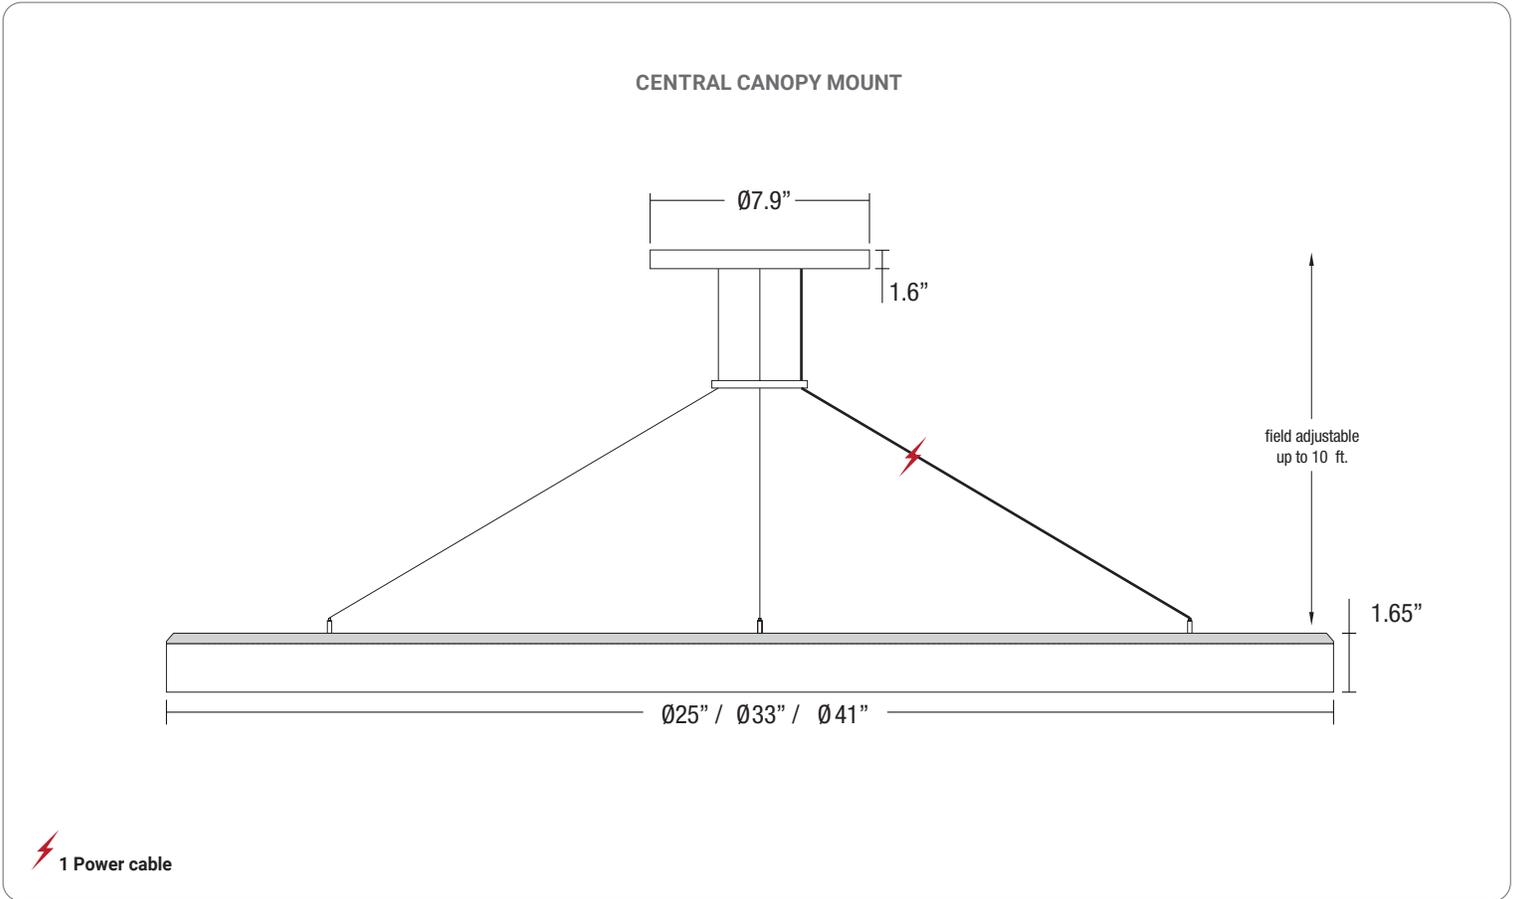

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)



All panels ASTM E84-16 Fire Rated

STANDARD PRINTS

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale



quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A

02.11.26