

180° rotation capability.




## FEATURES

Introducing the LINNA Wall Sconce LED Architectural Light — a sophisticated blend of modern design and high-performance lighting. This sleek, minimalist fixture complements any décor, delivering both functionality and visual impact.

Crafted from high-quality aluminum and available in three sizes with a wall-mounted option, LINNA embodies minimalist elegance and long-lasting durability. Its 180° rotation capability allows the linear light to adapt to a wide range of contemporary interiors, enhancing versatility and design flexibility.

Choose from two captivating finishes — Black or White — or customize it in any RAL color to perfectly match your space. With the LINNA Wall Sconce LED Architectural Light, you're not just illuminating a room — you're elevating it with refined aesthetics and innovative design.

## COLORS



Black




White




Custom RAL


## DIMENSIONS



Mounting Plate




Top-View



Side View of Light Source

LUMENS	350L, 600L, 700L
CCT	3000K
CRI	90+
COLOR QUALITY	2 Step MacAdam Ellipses
POWER	12W, 20W, 24W
LENGTH	23", 35", 47"
MOUNTING	Wall Mount
IP RATING	IP20-Dry or Damp locations
COLOR	Black, White, Custom RAL
DIMMING	DIMTR (TRIAC), DIM10 (0-10V)
REMOTE EMERGENCY	EMG-LED-16W, EMG-LED-25W
LIFE TIME	L70 at 50,000 hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

LENGTH	LUMENS	WATTS
23"	350L	12W
35"	600L	20W
47"	700L	24W

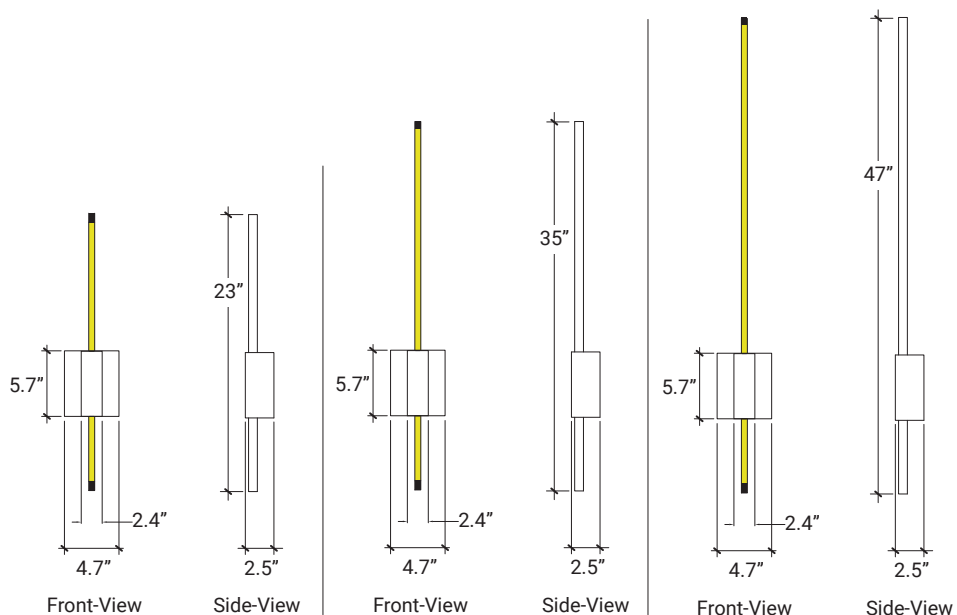

## OPTICS & PERFORMANCE

The optical system delivers high-efficiency LED light through a one-piece, high-quality PC lens, ensuring precise linear distribution. This design provides uniform, glare-free illumination while eliminating hot spots for optimal visual comfort.

The integrated diffuser enhances performance by dispersing light evenly, producing a seamless and consistent glow across the entire fixture and illuminated surface.

## CONSTRUCTION

The aluminum body, integrated with a one-piece PC diffuser, creates a strikingly contemporary design. Constructed from premium, high-quality aluminum, this luminaire combines durability with refined aesthetics, delivering both performance and modern elegance.

## MOUNTING

Surface-mount plate bracket for direct installation to a standard 4" octagonal junction box. Canopy mounts directly to the junction box for convenient maintenance access.

## ELECTRICAL

Driver is rated for 50 to 60Hz at 120V input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

## DIMMING & DRIVER INFORMATION

**DIMTR** - Triac & Electronic low voltage dimming. Available in 120V  
**DIM10** Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277V.

## WARRANTY

Five-year warranty for parts and components. (Labor not included)

## LISTINGS

cETLus - Listed

Example: AP-LINNA-LED-23-350L-DIMTR/120-DIM10/MVOLT-30K-90-WH-WM

SERIES	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CCT	CRI	COLOR	EMERGENCY	MOUNTING
AP-LINNA-LED	23 - 23.6" 35 - 35.4" 47 - 47.3"	350L - 350L 600L - 600L 700L - 700L	DIMTR/120-DIM10/MVOLT <small>Triac Dimming 120V/0-10V Dimmable in 120-277V</small>	30K -3000K	90 - 90+	WH - White BK - Black RAL - Consult factory	0-EMG-LED-16W-HV 0-EMG-LED-25W-HV <small>Remote Mount Please consult factory.</small>	WM - Wall Mount