



FEATURES

Introducing our **Decorative SOLARIS LED Round Luminaire**, the pinnacle of high-performance fixtures designed to emanate a seamlessly distributed luminous glow.


Available in two different sizes **and offering both suspended and ceiling mount options**, SOLARIS is a testament to modern aesthetics and high-quality materials. Its flexible acrylic diffuser and premium aluminum and metal body ensure captivating elegance and appearance.

Choose from **two captivating colors – white and black**, – or select from a range of RAL colors to seamlessly complement any interior style. With the **Decorative SOLARIS LED Round Luminaire**, **you are not just adding light**; you are elevating your space with style and advanced technology, transforming mere lighting into an artful experience.

COLORS





Black



White

DIMENSIONS

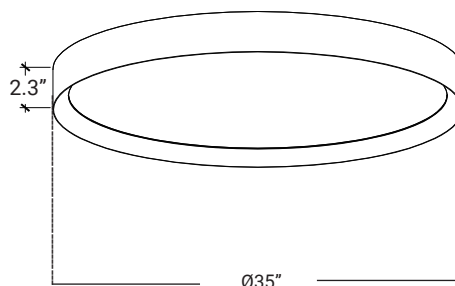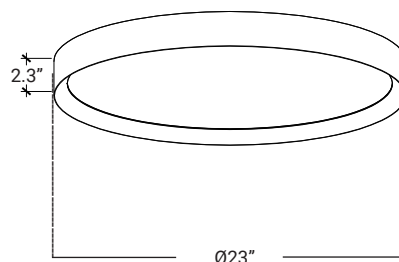

LUMENS	3500L, 4500L
CCT	3000K / 3500K / 4000K
CRI	90+
POWER	50W, 76W
LUMINAIRE SIZE	23", 35", Ø Diameter
MOUNTING	Ceiling Mount / Suspended Mount ¹
IP RATING	IP 20
COLOR	Black, White, Custom RAL
DIMMING	DIMTR (TRIAC), DIM10 (0-10V)
LIFE TIME	L70 at 50,000 hours

¹. Suspended mount option available for the Ø23" size; please consult factory.

SIZE	LUMENS	WATTS
Ø23"	3500L	50W
Ø35"	4500L	76W

OPTICS & PERFORMANCE

The optical system delivers high-efficiency LED light that passes through a one-piece, high-quality acrylic lens, ensuring optimal distribution patterns. This design creates a glare-free and even distribution of light. The ingenious technology minimizes glare and eradicates any hot spots, providing unrivaled light control.

The one-piece lens disperses light evenly in every direction. As a result, it produces a seamless and ambient glow, transforming your environment into a captivating haven of illumination.

CONSTRUCTION

The aluminum and metal body, integrated with a one-piece acrylic lens, creates a strikingly contemporary design. This luminaire, constructed with premium aluminum and metal showcases modern aesthetics and durability.

Engineered to perfection, our cutting-edge lighting solution includes essential features such as 10ft adjustable aircraft cables and an integral driver for effortless installation and impeccable performance. With its seamless fusion of form and function, this LED masterpiece delivers unparalleled illumination, creating an ambiance of refined elegance and technical excellence that complements any modern setting.

MOUNTING

Featuring both ceiling mount and suspended mount options, this fixture is designed for easy installation directly onto the ceiling surface, ensuring a seamless and stylish addition to any room. With the suspended mount option, the fixture comes delivered with adjustable 10-ft length cords, providing the flexibility needed for a seamless installation. Engineered to accommodate various mounting heights and ceiling types, this lighting solution offers adaptability to suit any space and customize your lighting setup.

ELECTRICAL

Driver is rated for 50 to 60Hz at 120V input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

DIMMING & DRIVER INFORMATION

DIMTR - Triac & Electronic low voltage dimming. Available in 120V
DIM10 Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277V. 347V please consult factory.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

UL Listed

Example: AP-SOLARIS-LED-RD-23-3500L-DIMTR/120-DIM10/MVOLT-30K/35K/40K-90-WH-CM

SERIES	LUMINAIRE SIZE	LUMENS	DIMMING/VOLTAGE	CCT	CRI	COLOR	EMERGENCY	MOUNTING
AP-SOLARIS-LED-RD	23 - Ø23.6" 35 - Ø35.4"	3500L - 3500L 4500L - 4600L	DIMTR/120-DIM10/MVOLT Triac Dimming 120V/0-10V Dimmable in 120-277V	30K/35K/40K - 3000K-3500K-4000K	90 - 90+	WH - White BK - Black RAL- Consult factory	0-EMG-LED-10W 0-EMG-LED-20W Remote Mount Please consult factory.	CM - Ceiling Mount SM - Suspended Mount ¹

¹.Suspended mount option available for the Ø23" size; please consult factory.