

LUMENS	4500L
CCT & TECHNOLOGIES	3000K, 3500K, 4000K
COLOR QUALITY	2 Step MacAdam Ellipse
MOUNTING	Pendant, Suspended
DIMMING & CONTROLS	DIMTR (TRIAC), DIM10 (0-10V)

SIZE	50.5" X 50.5"
HEIGHT	32"
FIXTURE FINISH	BK (Black), WH (White)
MATERIAL COLORS	Refer to SoftSense Material Color Chart
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

The **Spruce** model is distinguished by its geometric, multi-bladed composition. Surrounding the luminaire, sculptural acoustic blades create a striking architectural presence while gently absorbing sound. Meticulously designed to elevate both acoustics and visual impact, it introduces depth, texture, and a refined sense of sophistication to modern interiors.





Example: **AP-SOLARIS-LED-SQ-RHAPSODY-SOFT-SPRUCE-50IN-4500L-DIM10-MVOLT-40K-90-WH-CCM10-GRN**

AP-SOLARIS-LED SQ-RHAPSODY-SOFT												GRN
SERIES	STYLE	SIZE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	FINISH	MOUNTING OPTIONS	ACOUSTIC COLOR	
AP-SOLARIS-LED SQ-RHAPSODY-SOFT SoftSense LED Pendant	SPRUCE - Spruce	50IN - 50.5" W x 50.5" H	4500L - 3000 Lumens NLS ¹ - no light source	DIM10 - 0-10V Dimming ² DIMTR - Triac Dimming ³	120 MVOLT ²	30K - 3000K 35K - 3500K 40K - 4000K	90+	0-EMG-LED-25W	WH - Matte White BK - Black	CCM10 - Central canopy mounting 10' CCM20 - Central canopy mounting 20' SCM10 - Side canopy mounting 10' SCM20 - Side canopy mounting 20'	Refer to SoftSense material color chart for options example: GRN - Green	


- 1 No Light Source, please skip to "Mounting Option"
- 2 DIM10 available in 120V thru 277V input (DIM10-MVOLT)
- 3 DIMTR available with 120V only (DIMTR-120).

DIMENSIONS

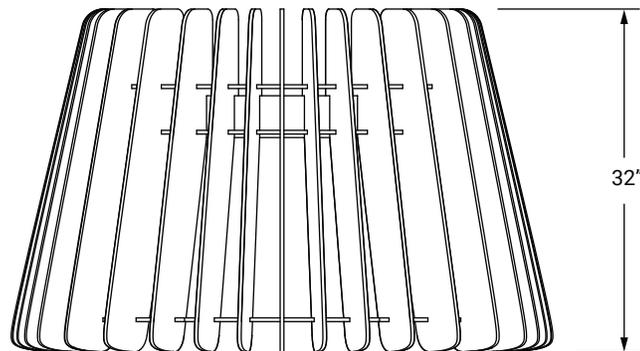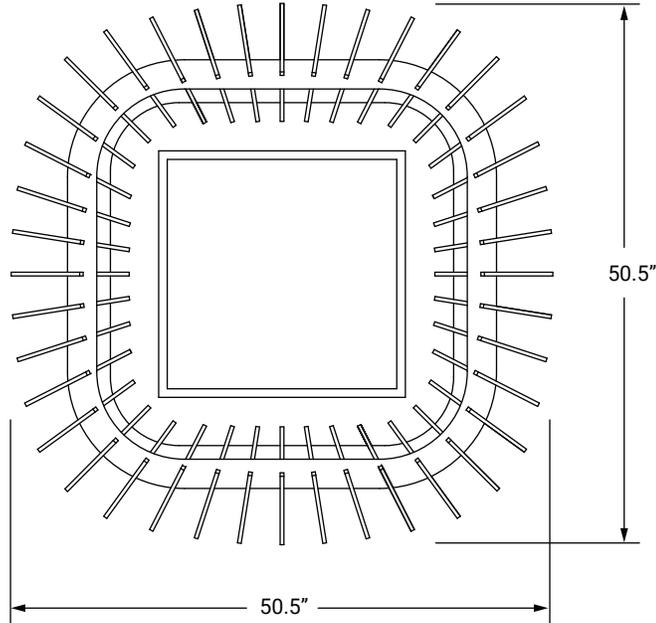


MOUNTING

SIDE CANOPY MOUNTING

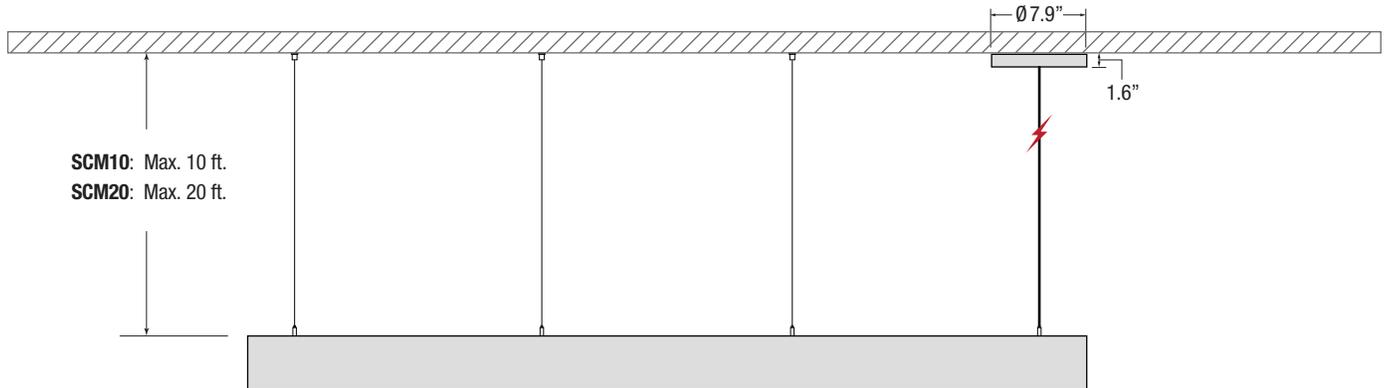

CENTRAL CANOPY MOUNTING

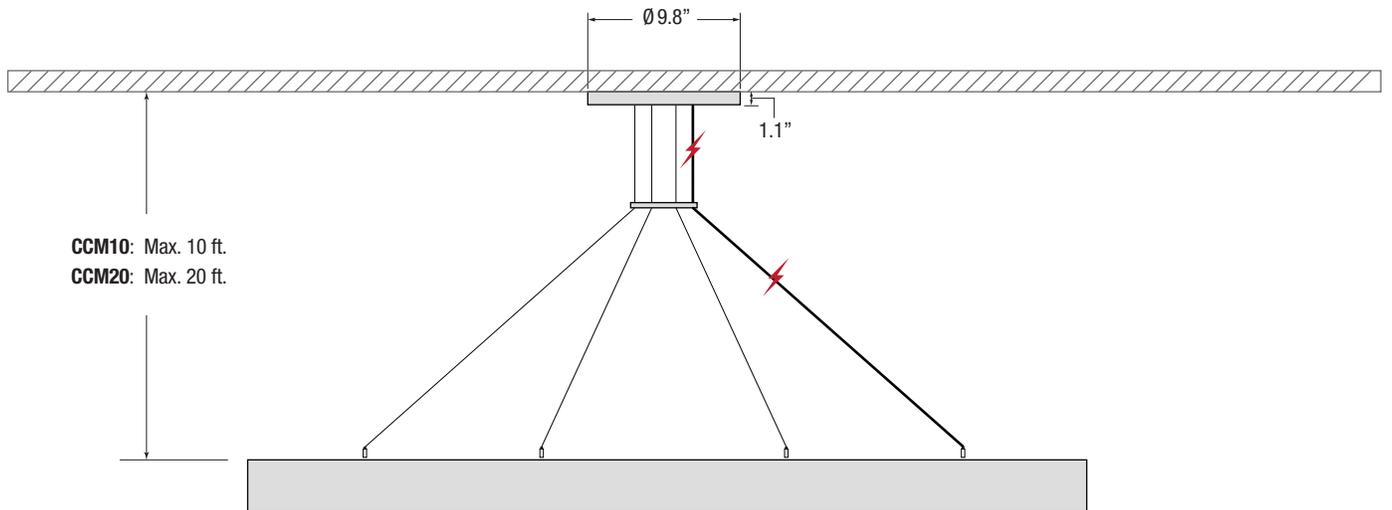

STANDARD COLORS

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)

All panels ASTM E84-16 Fire Rated

PURE PUR	STONE STN	BONE BNE	PEACH PCH
GRAY NOISE NSE	GREIGE GRG	SAND SND	ORANGE ORA
PEBBLE PEB	FOG FOG	DUST DST	BRASS BRS
GRAVEL GRV	WARM GRAY WGR	LATTE LTE	BRONZE BRZ
SHADOW SHD	HIPPO HIP	CLAY CLA	RUST RST
ASPHALT ASP	PERIWINKLE PRW	KELP KLP	PECAN PEC
ABYSS ABS	SKY BLUE SBL	CROCODILE CRC	FIG FIG
NIGHT NIT	SAPPHIRE SAP	SAGE SGE	EGGPLANT EGP
MIDNIGHT MDN	NAVY NVY	PISTACHIO PST	AMETHYST AME
EVERGREEN EVG	SEAWEED SWD	MATCHA MCH	PLUM PLU
MOSS MOS	BAY BAY	OLIVE OLV	CABBAGE CBG
COFFEE CFE	SEA SEA	GREEN GRN	PINK PNK
WINE WIN	DARK TEAL DTL	SUNSHINE SUN	PASSION PAS



quick ship available for any color depending on order quantity
*all colors are ASTM E84-16 fire rated, select colors are available as Class A