



FEATURES

Introducing our **Decorative WAVELUX LED Pendant**, the pinnacle of high-performance suspended fixtures designed to emanate a seamlessly distributed luminous glow.

Available in **three different sizes and offering a suspended mount option**, WAVELUX LED Pendant is a testament to modern aesthetics and high-quality materials. The flexible **silicone diffuser** and premium **aluminum body** ensure captivating elegance and appearance.


Choose from **two captivating colors – Black or White** – or select from a range of RAL colors to seamlessly complement any interior style. With the **Decorative WAVELUX LED Pendant**, you are not just adding light; you are elevating your space with **style and advanced technology**, transforming mere lighting into an artful experience.

| | |
|--------------------|-------------------------------------------------|
| LUMENS | 3000L, 3500L, 5000L |
| CCT | 3000K, 3500K, 4000K |
| CRI | 90+ |
| POWER | 50W, 65W, 80W |
| FIXTURE DIMENSIONS | 35" X 17" / 47" X 25" / 59" X 34" |
| MOUNTING | Suspended Mount (Adjustable 10-ft length cords) |
| IP RATING | IP 20 |
| COLOR | Black, White, Custom RAL |
| DIMMING | DIMTR (TRIAC), DIM10 (0-10V) |
| LIFE TIME | L70 at 50,000 hours |

COLORS








Black



White

DIMENSIONS

CANOPY

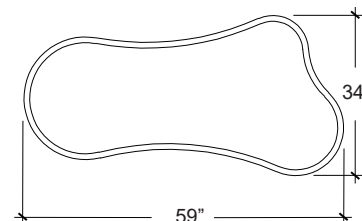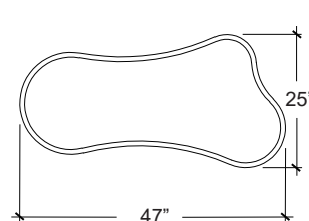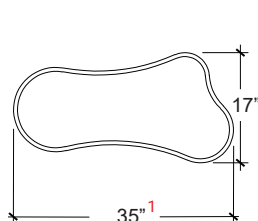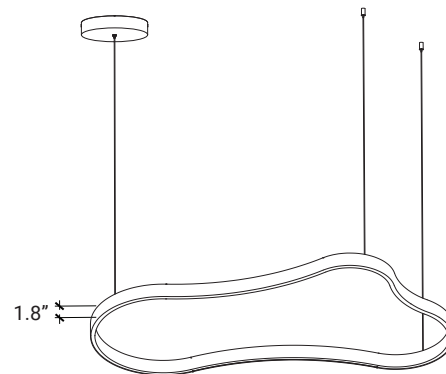

1. Luminaire with a size of 35" X 17" comes with a Ø 7.9" canopy.

| SIZE | LUMENS | WATTS |
|---------|--------|-------|
| 35"X17" | 3000L | 50W |
| 47"X25" | 3500L | 65W |
| 59"X34" | 5000L | 80W |

OPTICS & PERFORMANCE

The optical system delivers high-efficiency LED light that passes through a one-piece, high-quality silicone lens, ensuring optimal distribution patterns. This design creates a glare-free and even distribution of light. The ingenious technology minimizes glare and eradicates any hot spots, providing unrivaled light control.

The one-piece diffuser disperses light evenly in every direction. As a result, it produces a seamless and ambient glow, transforming your environment into a captivating haven of illumination.

CONSTRUCTION

The aluminum body integrated with a one-piece silicone diffuser creates a strikingly contemporary design. This luminaire, constructed with premium silicone and high-quality aluminum materials, showcases modern aesthetics and durability.

Engineered to perfection, our cutting-edge lighting solution includes essential features such as 10ft adjustable aircraft cables and an integral driver for effortless installation and impeccable performance. With its seamless fusion of form and function, this LED masterpiece delivers unparalleled illumination, creating an ambiance of refined elegance and technical excellence that complements any modern setting.

MOUNTING

Suspended mount option. Delivered with adjustable 10-ft length cords, our pendant mount provides the flexibility you need for a seamless installation. Engineered to accommodate various mounting heights and ceiling types, this lighting solution offers adaptability to suit any space.

For added convenience, our canopy can be directly mounted to the junction box, facilitating below-the-ceiling access for easy maintenance and servicing.

ELECTRICAL

Driver is rated for 50 to 60Hz at 120V input, produces less than 20% THD, has a power factor between 90% and 100%, and is thermally protected for additional safety.

DIMMING & DRIVER INFORMATION

DIMTR - Triac & Electronic low voltage dimming. Available in 120V
DIM10 Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277V. 347V please consult factory.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

UL Listed

Example: AP-WAVELUX-LED-35-3000L-DIMTR/120-DIM10/MVOLT-35K-90-WH-SM

| SERIES | LUMINAIRE SIZE | LUMENS | DIMMING/VOLTAGE | CCT | CRI | COLOR | EMERGENCY | MOUNTING |
|----------------|--------------------------------------------------------|-------------------------------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------|----------|---------------------------------------------------|---------------------------------------------------------------------------|----------------------|
| AP-WAVELUX-LED | 35 - 35.4"X17.7" 47 - 47.2"X25.9" 59 - 59"X34.2" | 3000L - 3000L 3500L - 3500L 5000L - 5000L | DIMTR/120-DIM10/MVOLT Triac Dimming 120V/0-10V Dimmable in 120-277V | 30K - 3000K ¹ 35K - 3500K 40K - 4000K ¹ | 90 - 90+ | WH - White BK - Black RAL - Consult factory | 0-EMG-LED-10W 0-EMG-LED-20W Remote Mount Please consult factory. | SM - Suspended Mount |

¹.MOQ (minimum order quantity) required for these CCT options, please consult factory.