



<b>LUMENS</b>	3000L, 3500L, 5000L	<b>DIMENSIONS</b>	(S) 35" x 17", (M) 47" x 25", (L) 59" x 34"
<b>CCT &amp; TECHNOLOGIES</b>	3000K, 3500K, 4000K	<b>HEIGHT</b>	2.15"
<b>COLOR QUALITY</b>	2 Step MacAdam Ellipse	<b>FIXTURE FINISH</b>	BK (Black), WH (Matt White), Custom RAL
<b>MOUNTING</b>	Suspended Mount (Adjustable 10-foot length cords)	<b>MATERIAL COLORS</b>	Refer to SoftSense Material Color Chart
<b>DIMMING &amp; CONTROLS</b>	DIMTR (TRIAC), DIM10(0-10V)	<b>PHOTOMETRIC TESTS</b>	In Accordance with IES LM79-08 and LM-80, and TM-30

The **Rhapsody** family comprises acoustic pendant and suspended luminaires, blending timeless form with contemporary performance. Defined by a clean, classic silhouette, each fixture delivers beautifully balanced illumination while discreetly enhancing acoustic comfort. This harmonious fusion of light and sound makes **Rhapsody** an elegant solution for a wide range of environments, including educational spaces, boardrooms, offices, hospitality settings, lobbies, and restaurants.

The **Flat** features an organic-shaped acoustic panel filling the luminaire, which softens sound while adding architectural depth. Thoughtfully crafted to enhance both acoustics and aesthetics, bringing refined texture to any modern space.



**ACOUSTIC MATERIAL - 9mm / 0.35" Thickness**

Due to variations in production batches, slight color differences may occur in the acoustic material. While we strive for consistency, exact color matches cannot be guaranteed.

Our panels come in 4' x 8' and are made from 100% polyethylene terephthalate (PET), with 50% post-consumer recycled material. PET is a moisture resistant green product with no added chemicals, binders, adhesives or dyes.

**ACOUSTIC CONSTRUCTION**

The metal frame is positioned atop the ring fixture, securely sandwiched between two layers of our acoustic panels. This design ensures a durable structure that resists sagging over time while enhancing noise absorption due to the increased material thickness.

**ACOUSTIC PANEL PERFORMANCE - 4' x 8' Panels**


Acoustic performance of specific fixture / product will greatly vary based on mounting, installation, and configuration in a space.

Noise Reduction Coefficient (NRC) - 0.75  
Weighted Sound Absorption Coefficient -  $a_w = 0.85$

NRC is a widely used standard to test sound absorption for 2-dimensional objects. It is the average absorption coefficient obtained from four key 1/3 octave frequencies: 250, 500, 1000, 2000 Hz.

**MAINTENANCE**

Acoustic material can be cleaned with a clean, soft, lint-free cloth or a vacuum.

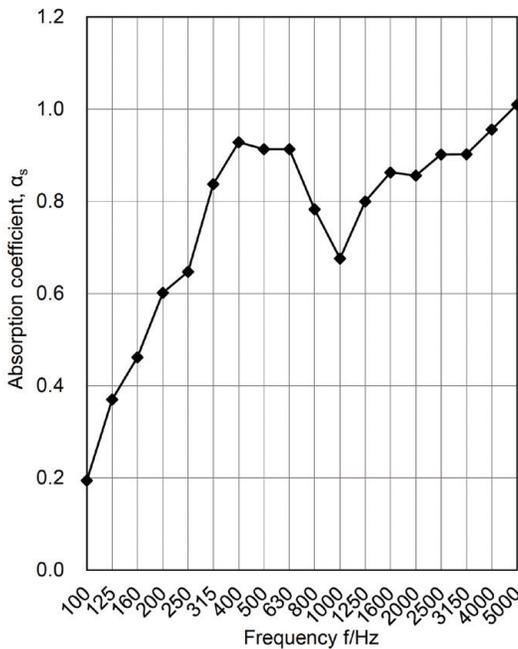

**OPTICS & PERFORMANCE**

The Harmony round triangular LED Suspended Inner Luminaire is a high-performance lighting solution designed to enhance any space with its sleek design and uninterrupted, even glow

**LUMINAIRE CONSTRUCTION**

Built as one continuous, 2" extruded aluminum piece with a matching seamless, flexible PC diffuser lens, this luminaire ensures both ease of installation and a minimalist, elegant charm.

**LUMEN DISTRIBUTION**

The driver and CCT switch are located inside the canopy.

**MOUNTING / SUSPENSION**

The fixture includes a central canopy mounting as the standard configuration. For side canopy mounting, field modification is required. The luminaire is supplied with three 11' suspension cables, one central canopy, one wire holder, and one side canopy.

**WARRANTY**

Limited five-year warranty.

**LISTINGS**

IP40  
L80B20 at 50,000 hours  
All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.  
cETLus Listed. Suitable for Dry Locations.

**LUMEN DETAILS**


Based on 4000K, 90+ CRI.  
Actual wattage may vary +/- 5%

LUMINAIRE SIZE	DIRECT	
	LUMENS	WATTS
35.4" x 17.7"	3000	50
47.2" x 25.9"	3500	65
59.0" x 34.2"	5000	80

Example: AP-WAVELUX-RHAPOSDY-FLAT-35IN-3000L-DIMTR/120-DIM10/MVOLT-35K-90-WH-SM-GRN


SERIES	SIZE	LUMENS	DIMMING/VOLTAGE	CRI	COLOR	EMERGENCY	MOUNTING	ACOUSTIC COLOR
AP-WAVELUX-RHAPSODY-SOFT	35IN - 35.4"X17.7" 47IN - 47.2"X25.9" 59IN - 59"X34.2"	3000L - 3000L 3500L - 3500L 5000L - 5000L	DIMTR/120-DIM10/MVOLT Triac Dimming 120V/0-10V Dimmable in 120-277V	90 - 90+	WH - White BK - Black RAL - Consult factory	0-EMG-LED-16W-HV 0-EMG-LED-25W-HV Remote Mount Please consult factory.	SM - Suspended Mount	Refer to SoftSense material color chart for options example: GRN - Green
STYLE	FLAT - Flat		CCT					
			30K - 3000K <sup>1</sup> 35K - 3500K 40K - 4000K <sup>1</sup>					

**1.MOQ (minimum order quantity) required for these CCT options, please consult factory.**

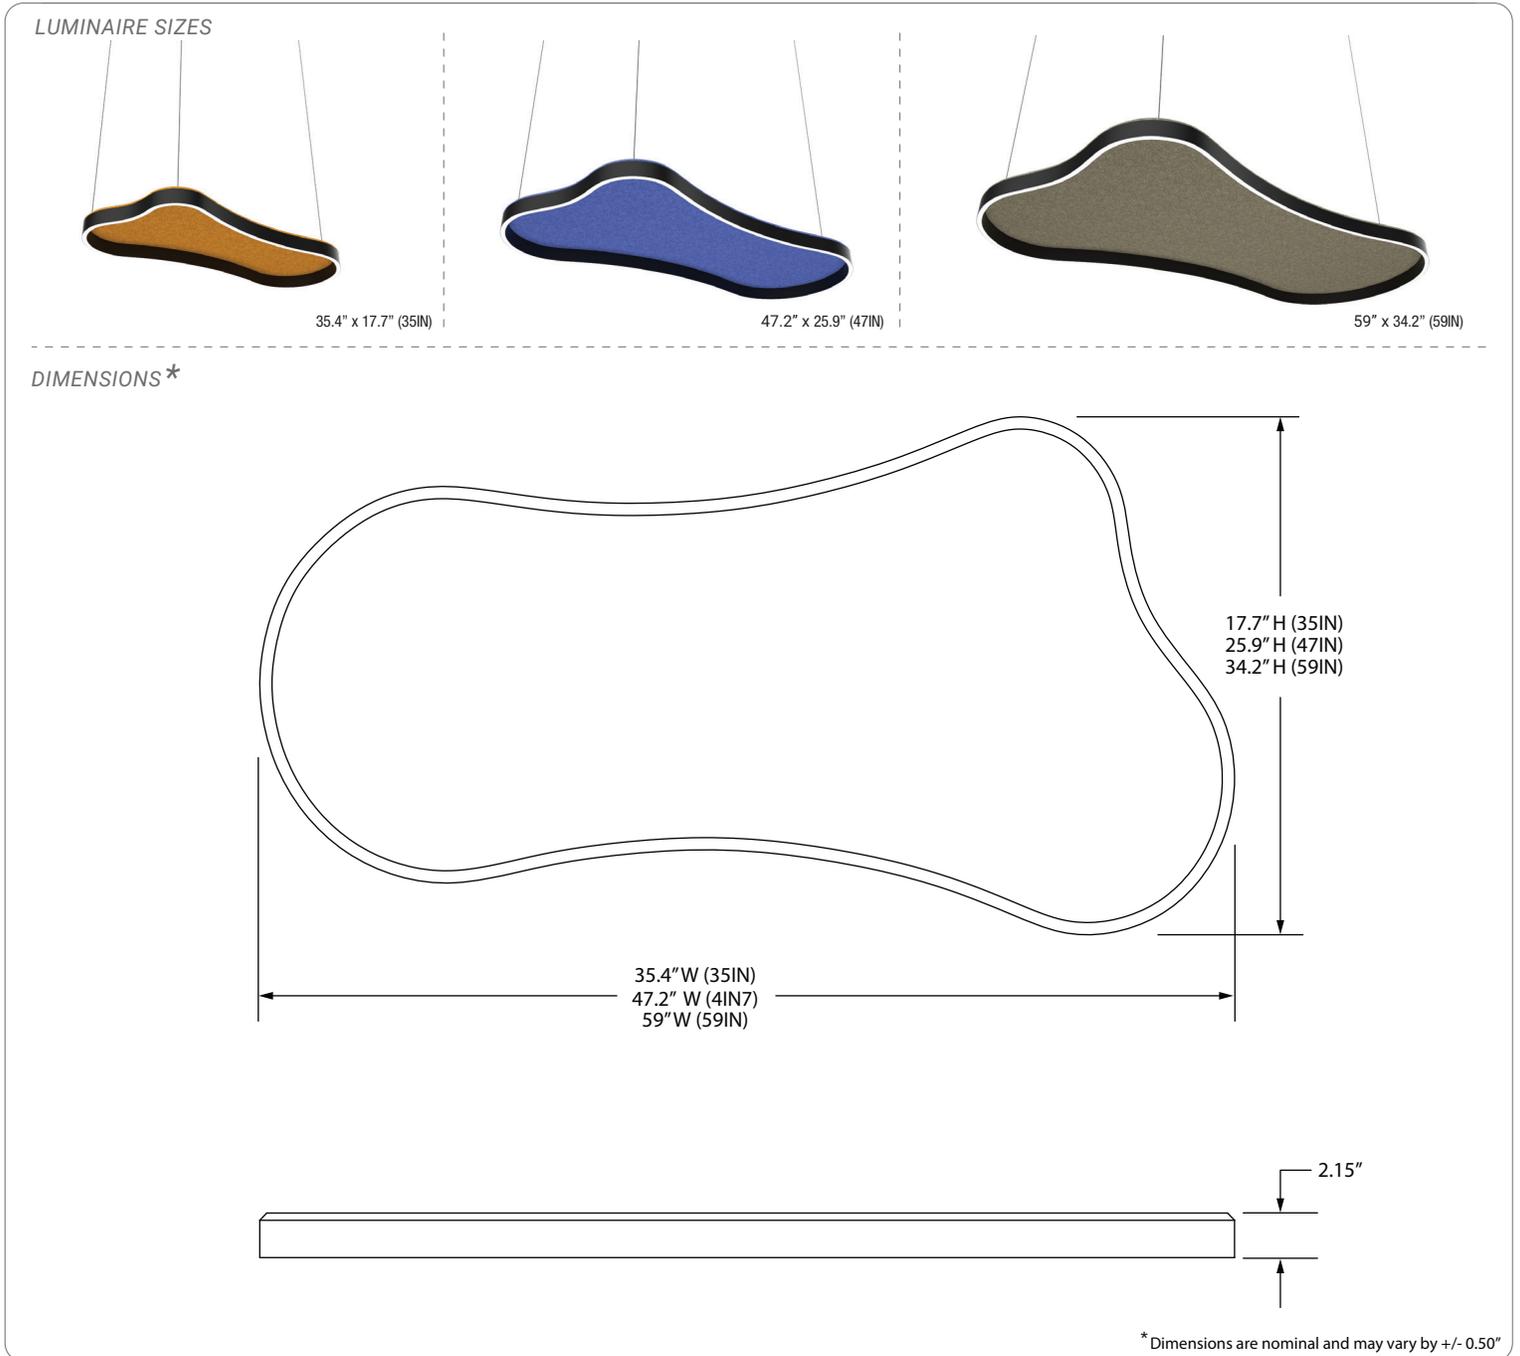

**MOUNTING OPTIONS**

The fixture comes with a side canopy mounting as standard for all sizes.

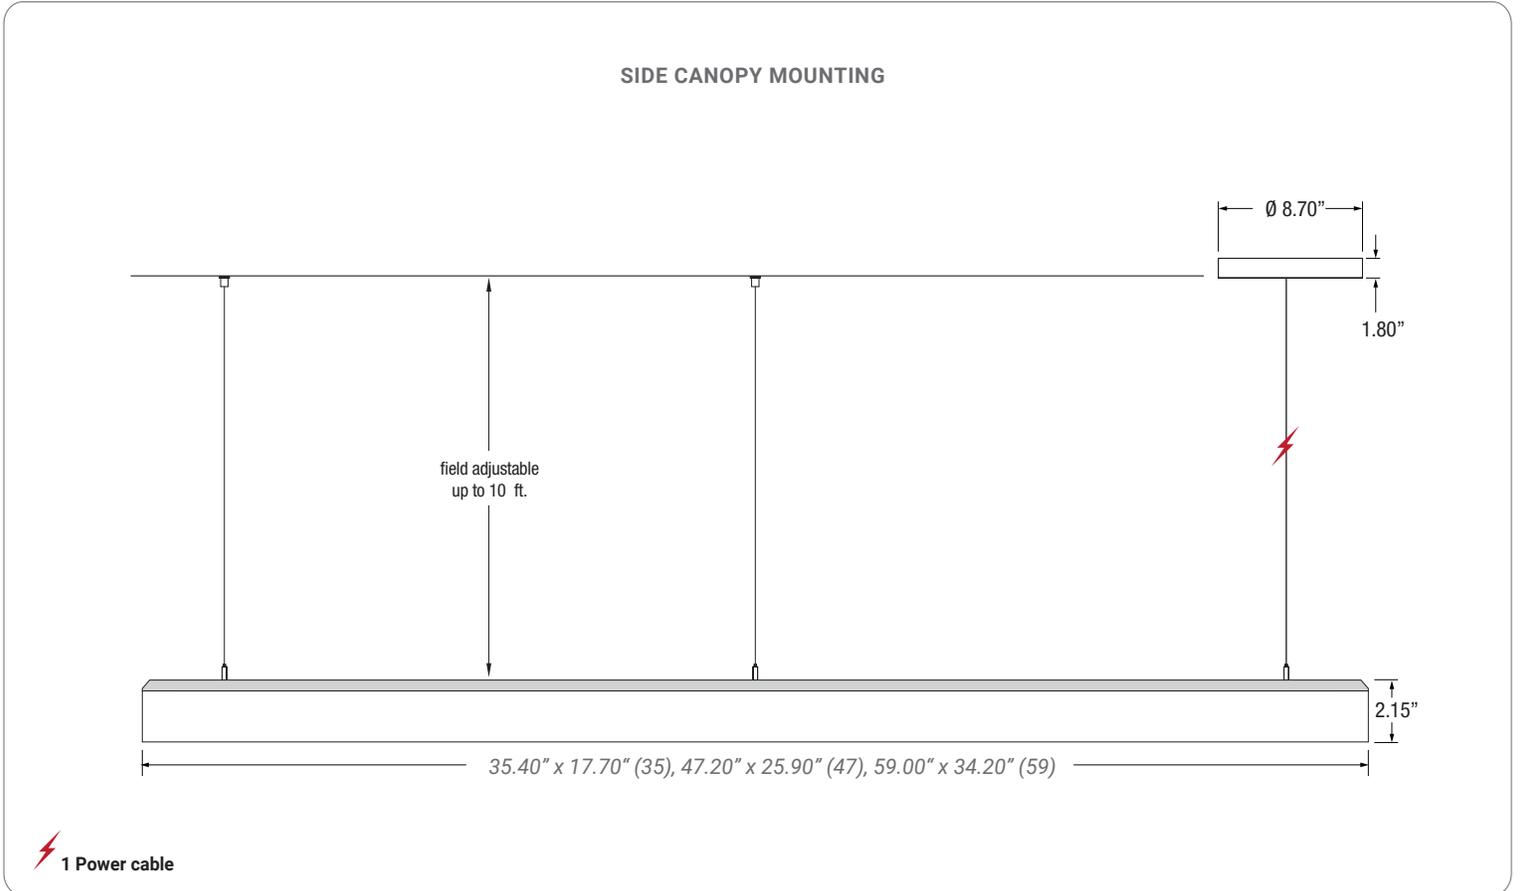

**STANDARD COLORS**

Panel Thickness: 9 mm / 0.35" (+/- 0.25 mm)



All panels ASTM E84-16 Fire Rated

**STANDARD PRINTS**

Panel Thickness: 8.5 mm / 0.34" (+/- 0.5 mm)



prints shown at 12% scale



quick ship available for any color depending on order quantity  
\*all colors are ASTM E84-16 fire rated, select colors are available as Class A