B25RIC-AT


5" Shallow IC Remodel Housing

Catalog Number:	
Project Name:	Туре:
Note:	elite

LAMP WATTAGE: (1) MAXIMUM 50W R/PAR30, 40W A19



DESIGNED FOR 2" X 6" JOIST CONSTRUCTION




DESCRIPTION

Thermally protected, IC rated specification grade remodel recessed housing. For remodeling installations where housing will be in direct contact with insulation. For fast and easy installation in existing plaster or mechanical ceilings from ½" to 1-3/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with a strain relief. Accommodates up to 50W PAR30, R30 lamps and 40W A19 lamps.

SPECIFICATION

- A. HOUSING Die-formed, all aluminum construction for maximum heat dissipation and rust protection.
- B. SOCKET Medium base screw shell porcelain socket snaps into trim to allow usage of different lamp types, as well as proper and consistent lamp positioning.
- C. INSTALLATION Four Preinstalled spring clips which secure the housing firmly into ceiling and accommodate ceiling thickness from 1/2" to 1-3/8".
- D. JUNCTION BOX feed through wiring, provided with eight ½" KOs and four Romex knockouts with strain relief.
- **E. THERMAL PROTECTION** Standard thermal protection device guards against improper installation, overlamping and misuse of insulation material.



BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES

- Thermally Protected remodel IC housing.
- Dependable, favorable design and effortless installation.
- Unit slips through 5-1/2" ceiling opening.
- · Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".
- · Can be installed from below the ceiling.
- 5 1/2" height allows use in 2" x 6" joist construction.
- · Wire through junction box.
- · Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.

OPTIONS AIR-SHUT

- · Gasket to prevent air flow from heated or air conditioned spaces.
- . Meets all national air flow requirements.



ITEM SELECTOR: (Please check the boxes below for the option desired)

The Selection. (I lease check the boxes below for the option desired)						
ТҮРЕ	AIR-SHUT	OPTION	TRIM TYPE	BAFFLE	REFLECTOR	TRIM/RING
B25RIC	□ AT	☐ (W) With quick connects	□ B531	□ w	□ CL	□ WH
			□ B508	□ P	□ RG	□ BK
			□ B563	□ SN	□ w	□ SN
			□ B502	□ CP	□ MB	□ CP
			□ B514	□ BZ	□ BZ	□ CH
					□ CP	□ PB
					□ SN	□ BZ
					□ SHZ	

Specifications:

B25RIC

AIR-SHUT BAFFLE REFLECTOR BAFFLE W W P Bla REFLECTOR TRIM/RING WH BK SN CP CH PB BZ Black Gold Black SN CP BZ W MB BZ CP SN Satin Nickel Black Bronze Copper Copper Chrome Copper Polish Brass Satin Haze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory




Sample of Catalog Number: B25RIC-AT-W-B531-W-WH

TRIM/RING

Incandescent Trims

Catalog Number:	
Project Name:	Туре:
Note:	

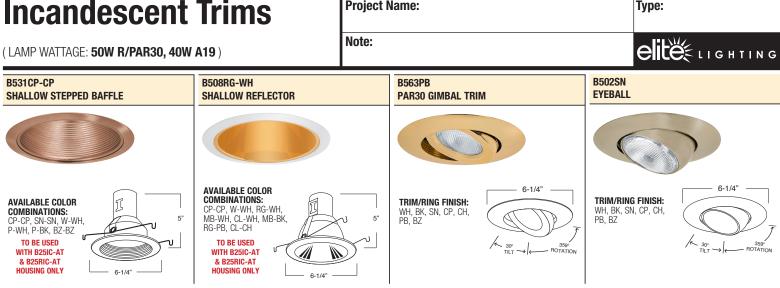



BAF	FLE	REF	LECTOR	TRIN	1 RING
W	White	CL	Chrome	WH	White
P	Black	RG	Gold	BK	Black
SN	Satin Nickel	W	White	SN	Satin Nickel
CP	Copper	MB	Black	CP	Copper
BZ	Bronze	CP	Copper	CH	Chrome
		SN	Satin Nickel	PB	Polish Brass
				BZ	Bronze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.