
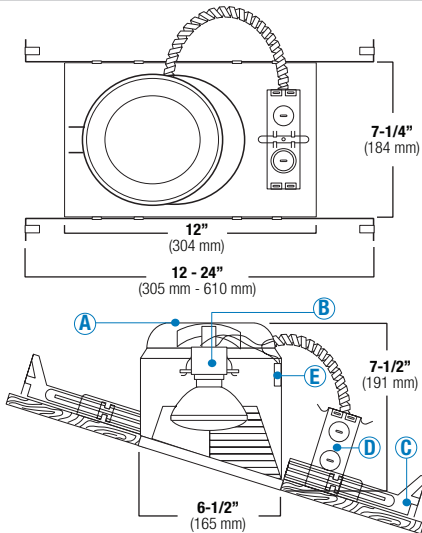


B36

6" Slope Non-IC Housing

LAMP WATTAGE: (1) MAXIMUM 150W R40/PAR38, 12-W BR40, 85W BR30, 150W A21

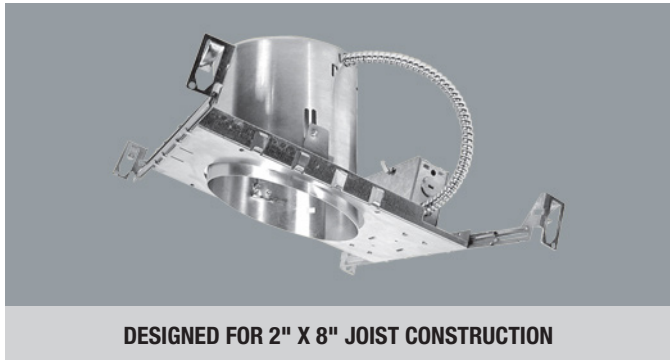

ITEM SELECTOR: (Please check the boxes below for the option desired)

TYPE	AIR-SHUT	TRIM TYPE		BAFFLE	REFLECTOR	TRIM/RING
B36	<input type="checkbox"/> AT	<input type="checkbox"/> B391	<input type="checkbox"/> B601	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH
		<input type="checkbox"/> B392	<input type="checkbox"/> B601L	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK
		<input type="checkbox"/> B602	<input type="checkbox"/> B605	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN
		<input type="checkbox"/> B646	<input type="checkbox"/> B605L	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP
		<input type="checkbox"/> B394		<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH
		<input type="checkbox"/> B395			<input type="checkbox"/> CP	<input type="checkbox"/> PB
		<input type="checkbox"/> B663			<input type="checkbox"/> SN	<input type="checkbox"/> BZ
		<input type="checkbox"/> B673			<input type="checkbox"/> SHZ	

Specifications:

B36 - - - - -
 AIR-SHUT OPTION TRIM TYPE BAFFLE REFLECTOR TRIM/RING GLASS

Sample of Catalog Number: B36-AT-B391-W-WH



Submittal form is available @ www.iuseelite.com
 Tel: 323-888-1973 • Fax: 323-888-1977

Catalog Number:	
Project Name:	
Note:	Type:

DESCRIPTION

Thermally protected, specification grade recessed housing. For new construction non-insulated ceilings or where insulation can be kept 3" from housing. Designed for sloped ceiling applications where the ceiling pitch ranges from 2/12 to 6/12. Accommodates up to 150W R40/PAR38, 120W BR40, 85W BR30 and 150W A21 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four ½" KOs, one ¾" KO and four Romex knockouts with strain relief.

SPECIFICATION


A. HOUSING - High temperature painted 22 gauge cold rolled steel construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate ½" to 1-3/8" ceiling. Accommodate lamps up to 150W depending on trim used.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on a mounting bracket is specially designed to swivel and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. Integral bar hanger nailers are designed to be hammered directly into the joist without additional nails or screws and makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

D. JUNCTION BOX - through-branch circuit wiring and has four ½" KOs, one ¾" KO and four Romex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlampping and misuse of insulation material.

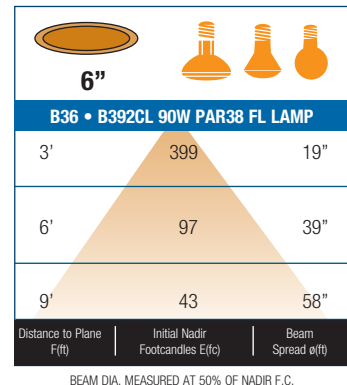

FEATURES

- Thermally Protected Non-IC housing.
- The socket bracket is specially designed to swivel and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.
- Adjustable socket bracket with a slope indicator provides consistent lamp alignment and setup.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design and effortless installation.
- 7-½" height allows use in 2" x 8" joist construction.
- Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	BZ Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

Specifications and Dimensions subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-05-2018

6" Slope Ceiling Incandescent Trims

(LAMP WATTAGE: (1) MAXIMUM 150W R40/PAR38, 12-W BR40, 85W BR30, 150W A21)

Catalog Number:

Project Name:

Note:


Type:

B391CP-CP METAL STEPPED BAFFLE R30/PAR30




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B394P-WH PAR38/R40 STEPPED BAFFLE



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B392CL-WH R30/PAR30 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP,
SN, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B395CP-WH R38/PAR40 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP,
SN, BZ


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B602SN EYEBALL



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B646P-WH EYEBALL WITH BAFFLE

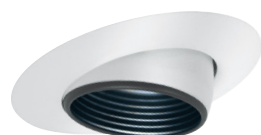

BAFFLE FINISH:
W, P


TRIM/RING FINISH:
WH



B663PB PAR30 GIMBAL RING



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B673P-OV PAR30 BAFFLE W/ GIMBAL RING



BAFFLE FINISH:
W, P, SN, CP

TRIM/RING FINISH:
WH




B601CP METAL ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B601L PLASTIC ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WHITE PLASTIC




B605PB METAL FRESNEL LENS



LENS:
FRESNEL

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B605L PLASTIC FRESNEL LENS



LENS:
FRESNEL

TRIM/RING FINISH:
WHITE PLASTIC



BAFFLE	REFLECTOR	TRIM RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	CP Copper	CH Chrome
	SN Satin Nickel	PB Polish Brass
		BZ Bronze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.