


B36R

6" Slope Non-IC Remodel Housing

LAMP WATTAGE: (1) MAXIMUM 150W R40/PAR38, 12-W BR40, 85W BR30, 150W A21

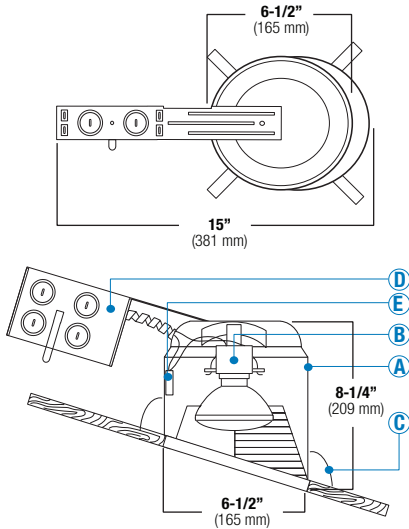

ITEM SELECTOR: (Please check the boxes below for the option desired)

TYPE	AIR-SHUT	TRIM TYPE		BAFFLE	REFLECTOR	TRIM/RING
B36R	<input type="checkbox"/> AT	<input type="checkbox"/> B391	<input type="checkbox"/> B601	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH
		<input type="checkbox"/> B392	<input type="checkbox"/> B601L	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK
		<input type="checkbox"/> B602	<input type="checkbox"/> B605	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN
		<input type="checkbox"/> B646	<input type="checkbox"/> B605L	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP
		<input type="checkbox"/> B394		<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH
		<input type="checkbox"/> B395			<input type="checkbox"/> CP	<input type="checkbox"/> PB
		<input type="checkbox"/> B663			<input type="checkbox"/> SN	<input type="checkbox"/> BZ
		<input type="checkbox"/> B673			<input type="checkbox"/> SHZ	

Specifications:

B36R - - - - -
 AIR-SHUT OPTION TRIM TYPE BAFFLE REFLECTOR TRIM/RING GLASS

Sample of Catalog Number: B36R-AT-B391-W-WH



Submittal form is available @ www.iuseelite.com
 Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
 subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-05-2018

Catalog Number:	
Project Name:	
Note:	Type:

DESCRIPTION

Thermally protected, specification grade recessed housing. For remodel construction, non-insulated ceilings or where insulation can be kept 3" from housing. Designed for sloped ceiling applications where the ceiling pitch ranges from 2/12 to 6/12. Accommodates up to 150W R40/PAR38, 120W BR40, 85W BR30 and 150W A21 lamps. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with strain relief.

SPECIFICATION

A. HOUSING - High temperature painted 22 gauge cold rolled steel construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodated 1/2" to 1-3/8" ceiling. Accommodates lamps up to 150W depending on trim used.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on a mounting bracket is specially designed to swivels and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.


C. BAR HANGERS - Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".

D. JUNCTION BOX - through-branch cir-cuit wiring and has eight 1/2" KOs and four Romex knock-outs with a strain relief.

E. THERMAL PROTECTION - Standard thermal protec-tion device guards against improper installation, over-lamping and misuse of insulation material.

FEATURES

- Thermally Protected Non-IC Remodel housing
- The socket bracket is specially designed to swivels and rotate so the lamp could be aligned properly. The lamp will aim straight down regardless of the ceiling pitch.

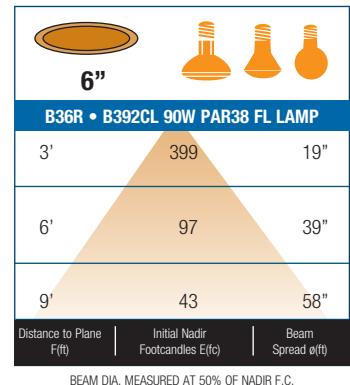

- Adjustable socket bracket with a slope indicator provides consistent lamp alignment and setup.
- Unit slips through 6-1/2" ceiling opening.
- Four Preinstalled spring clips which secure the housing firmly into ceiling and accommodate ceiling thickness from 1/2" to 1-3/8".
- Wire through junction box
- Can be installed from below the ceiling.
- Dependable, favorable design and effortless installation.
- 7-1/2" height allows use in 2"x 8" joist construction.
- Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	BZ Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

6" Slope Ceiling Incandescent Trims

(LAMP WATTAGE: (1) MAXIMUM 150W R40/PAR38, 12-W BR40, 85W BR30, 150W A21)

Catalog Number:

Project Name:

Note:


Type:

B391CP-CP METAL STEPPED BAFFLE R30/PAR30




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B394P-WH PAR38/R40 STEPPED BAFFLE



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B392CL-WH R30/PAR30 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP,
SN, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B395CP-WH R38/PAR40 REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP,
SN, BZ


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B602SN EYEBALL



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B646P-WH EYEBALL WITH BAFFLE

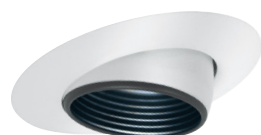

BAFFLE FINISH:
W, P


TRIM/RING FINISH:
WH



B663PB PAR30 GIMBAL RING



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B673P-OV PAR30 BAFFLE W/ GIMBAL RING



BAFFLE FINISH:
W, P, SN, CP

TRIM/RING FINISH:
WH




B601CP METAL ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B601L PLASTIC ALBALITE LENS



LENS:
ALBALITE

TRIM/RING FINISH:
WHITE PLASTIC




B605PB METAL FRESNEL LENS



LENS:
FRESNEL

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B605L PLASTIC FRESNEL LENS



LENS:
FRESNEL

TRIM/RING FINISH:
WHITE PLASTIC



BAFFLE	REFLECTOR	TRIM RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	CP Copper	CH Chrome
	SN Satin Nickel	PB Polish Brass
		BZ Bronze

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.