



B4-GU24-IC

4" Miniature Compact Fluorescent GU24 IC Housing

LAMP WATTAGE: (1) MAXIMUM 19W GU24

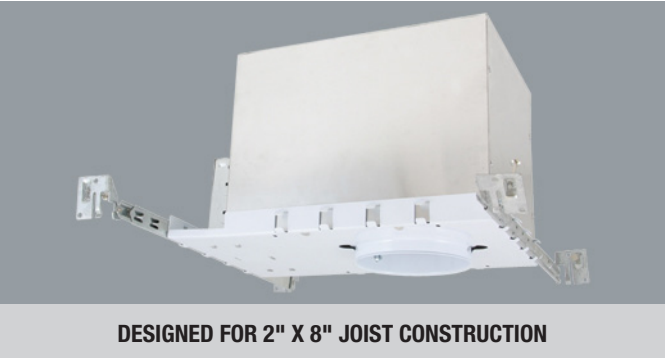

DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

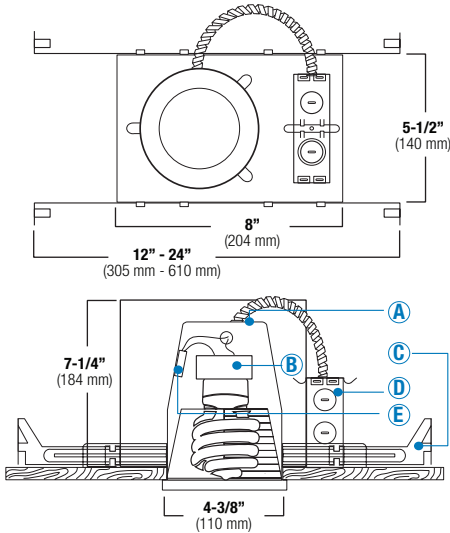

Catalog Number:	
Project Name:	Type:
Note:	

DESCRIPTION
Small aperture thermally protected, specification grade recessed housing. For new construction IC rated applications. Accommodates up to 19W CFL GU24 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

SPECIFICATION
A. HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

B. SOCKET - GU24 BASE is screwed to the top of housing but can be removed to snap into socket supporting trims.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

D. JUNCTION BOX - UL listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, over-lamping and misuse of insulation material

120V



GU24 SOCKET

- FEATURES**
- Thermally Protected IC housing.
 - Designed for accent and task lighting applications.
 - Wire through junction box.
 - Preinstalled adjustable bar hanger.
 - Dependable, favorable design and effortless installation.
 - 7-1/4" height allows use in 2" x 8" joist construction.
 - Special screw on the frame locks bar hangers in place which prevents the housing from any movement once installed.

- OPTIONS**
AIR-SHUT
- Gasket to prevent air flow from heated or air conditioned spaces.
 - Meets all national air flow requirements.
 - Lamp must be ordered separately (please consult factory)

- UL AND C-UL LISTED**
- For Damp location
 - For Feed-through wiring



B4-GU24-IC - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	VOLTAGE	AIR-SHUT	OTHER OPTION	TRIM TYPE		BAFFLE	REFLECTOR	TRIM/RING	GLASS
Maximum lamp wattage 19W, see specific trims for details	<input type="checkbox"/> 120	<input type="checkbox"/> AT	<input type="checkbox"/> W - With Quick Connector	<input type="checkbox"/> B401 <input type="checkbox"/> B402 <input type="checkbox"/> B406 <input type="checkbox"/> B407 <input type="checkbox"/> B420 <input type="checkbox"/> B462 <input type="checkbox"/> B452 <input type="checkbox"/> B455 <input type="checkbox"/> B451 <input type="checkbox"/> B454 <input type="checkbox"/> B437	<input type="checkbox"/> B438 <input type="checkbox"/> B439 <input type="checkbox"/> B471 <input type="checkbox"/> B473 <input type="checkbox"/> B444	<input type="checkbox"/> W <input type="checkbox"/> P <input type="checkbox"/> SN <input type="checkbox"/> CP <input type="checkbox"/> BZ	<input type="checkbox"/> CL <input type="checkbox"/> RG <input type="checkbox"/> W <input type="checkbox"/> MB <input type="checkbox"/> BZ <input type="checkbox"/> CP <input type="checkbox"/> SN <input type="checkbox"/> SHZ	<input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SN <input type="checkbox"/> CP <input type="checkbox"/> CH <input type="checkbox"/> PB <input type="checkbox"/> BZ	<input type="checkbox"/> Green <input type="checkbox"/> Yellow <input type="checkbox"/> Pink <input type="checkbox"/> Brown <input type="checkbox"/> Navy Blue <input type="checkbox"/> Orange <input type="checkbox"/> Blue <input type="checkbox"/> White <input type="checkbox"/> Red

Specifications:

B4-GU24-IC

VOLTAGE - AIR-SHUT - OPTIONS - TRIM TYPE - REFLECTOR - BAFFLE - RING - GLASS

BAFFLE	REFLECTOR	TRIM/RING
W White P Black SN Satin Nickel CP Copper BZ Bronze	CL Chrome RG Gold W White MB Black BZ Bronze CP Copper SN Satin Nickel SHZ Satin Haze	WH White BK Black SN Satin Nickel CP Copper CH Chrome PB Polish Brass BZ Bronze

Sample of Catalog Number: B4-GU24-IC-AT-W-B401W-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

4" CFL Trims

(LAMP WATTAGE: (1) MAXIMUM 19W GU24)

Catalog Number:

Project Name:

Type:

Note:


elite LIGHTING

**B401CP-CP
STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B402CP-WH
REFLECTOR**




REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B406P-WH
WALL WASH WITH BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

**TRIM/RING/COVER
FINISH:**
WH, BK




**B407CL-WH
WALL WASH WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB, BZ,
CP, SN, SHZ


**TRIM/RING/COVER
FINISH:**
WH, BK



**B420-GREEN
GLASS TRIM**



GLASS FINISH:
GREEN, YELLOW,
PINK, BROWN, NAVY
BLUE, ORANGE,
WHITE, RED




**B462CL-WH
SEMI-FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B452CP
ALBALITE LENS**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B455PB
FRESNEL LENS**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B451PB
DROP OPAL LENS**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B454CP-WH
CLEAR LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B437WH
SMOOTH FROST SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B438WH
DESIGNER SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B439WH
SMOOTH FROST DOME SHOWER LITE**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B471CP-WH
SQUARE STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B473CP-WH
SQUARE REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B444CL-WH
SQUARE FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011