

B4-GU24-RIC

4" Miniature Compact Fluorescent GU24 IC Remodel Housing

LAMP WATTAGE: (1) MAXIMUM 19W GU24

Catalog Number:

Project Name:


Type:

Note:

elite LIGHTING



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

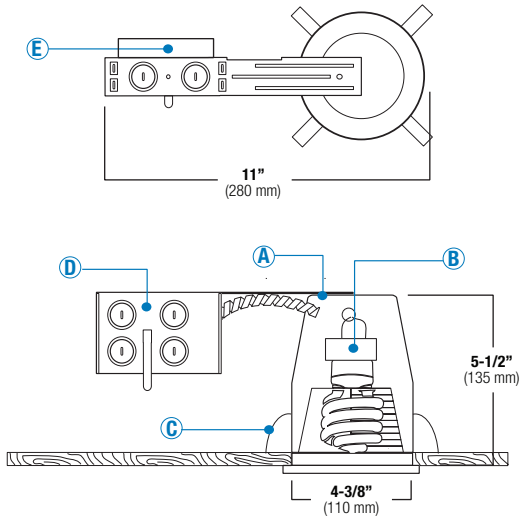

DESCRIPTION

Small aperture thermally protected, specification grade recessed housing. For remodel IC rated applications. For fast and easy installation in existing plaster or mechanical ceilings from 1/2" to 1-3/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with strain relief. Accommodates up to 19W GU24 lamps.

SPECIFICATION

A. HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Accommodate lamps up to 19W depending on trim used.

B. SOCKET - GU24 BASE is screwed to the top of housing but can be removed to snap into socket supporting trims.

C. INSTALLATION - Four preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".

D. JUNCTION BOX - UL for feed through wiring with eight 1/2" KOs and four Romex knockouts with strain relief.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, over-lamping and misuse of insulation

FEATURES

- Thermally Protected IC Remodel housing.
- Dependable, favorable design and effortless installation.
- Unit slips through 4-1/4" ceiling opening.
- Four preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".
- Can be installed from below the ceiling.
- 6-1/8" height allows use in 2" x 8" joist construction.

120V



GU24 SOCKET

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.
- Lamp must be ordered separately (please consult factory)

UL AND C-UL LISTED

- For Damp location
- For Feed-through wiring

SAME DAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

c UL US LISTED

B4-GU24-RIC - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	VOLTAGE	AIR-SHUT	OTHER OPTION	TRIM TYPE		BAFFLE	REFLECTOR	TRIM/RING	GLASS
Maximum lamp wattage 19W, see specific trims for details	120	AT	W - With Quick Connector	B401	B438	W	CL	WH	Green
				B402	B439	P	RG	BK	Yellow
				B406	B471	SN	W	SN	Pink
				B407	B473	CP	MB	CP	Brown
				B420	B444	BZ	BZ	CH	Navy Blue
				B462			CP	PB	Orange
				B452			SN	BZ	Blue
				B455			SHZ		White
				B451					Red
				B454					
				B437					

Specifications:

B4-GU24-RIC

VOLTAGE - AIR-SHUT - OPTIONS - TRIM TYPE - REFLECTOR - BAFFLE - RING - GLASS

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	BZ Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

Sample of Catalog Number: B4-GU24-RIC-AT-W-B401W-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

4" CFL Trims

(LAMP WATTAGE: (1) MAXIMUM 19W GU24)

Catalog Number:

Project Name:

Type:

Note:


elite LIGHTING

**B401CP-CP
STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B402CP-WH
REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B406P-WH
WALL WASH WITH BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

**TRIM/RING/COVER
FINISH:**
WH, BK



**B407CL-WH
WALL WASH WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB, BZ,
CP, SN, SHZ


**TRIM/RING/COVER
FINISH:**
WH, BK



**B420-GREEN
GLASS TRIM**



GLASS FINISH:
GREEN, YELLOW,
PINK, BROWN, NAVY
BLUE, ORANGE,
WHITE, RED




**B462CL-WH
SEMI-FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B452CP
ALBALITE LENS**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B455PB
FRESNEL LENS**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B451PB
DROP OPAL LENS**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B454CP-WH
CLEAR LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B437WH
SMOOTH FROST SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B438WH
DESIGNER SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B439WH
SMOOTH FROST DOME SHOWER LITE**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B471CP-WH
SQUARE STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B473CP-WH
SQUARE REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B444CL-WH
SQUARE FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011