

B4PL

4" Miniature Compact Fluorescent Non-IC Housing (Up to 26W)

LAMP WATTAGE: UP TO 26W

Catalog Number:

Project Name:

Type:

Note:

elite LIGHTING

DESCRIPTION

Small aperture thermally protected, specification grade compact fluorescent recessed housing. For new construction non-insulated ceilings or where insulation can be kept 3" from housing. Accommodates (1) compact fluorescent lamp. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four ½" KOs, one ¾" KO and four Romex knockouts with strain relief.

SPECIFICATION


A. HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate ½" to 1-3/8" ceiling.

B. SOCKET - One vertically mounted plug-in socket. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

C. BALLAST - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Advance or Universal.

D. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

E. JUNCTION BOX - has four ½" KOs, one ¾" KO and four Romex knockouts with true pry-out slots and strain clamps.

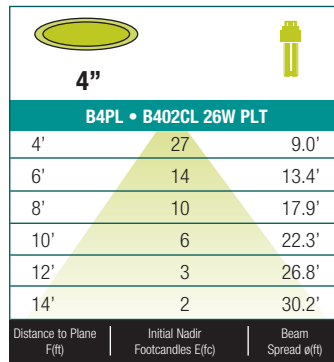

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES


- Thermally Protected Miniature Compact Fluorescent Non-IC housing.
- Integral fluorescent ballast.
- Wire through junction box
- Preinstalled adjustable bar hanger
- Dependable, favorable design and effortless installation.
- **(B4PL-18-E) 5-½" height allows use in 2" x 6" joist construction.**
- Special screw on the frame locks bar hangers in place which prevents the housing from any movement once installed.

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

DESIGNED FOR 2" X 6" JOIST CONSTRUCTION

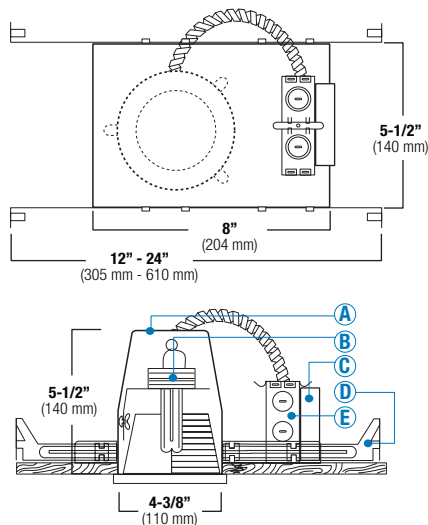

SAME DAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

B4PL - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE	BAFFLE	REFLECTOR	TRIM/RING	GLASS
<input type="checkbox"/> 1X9	<input type="checkbox"/> (E) Electronic	<input type="checkbox"/> MVOLT (120/277)	<input type="checkbox"/> EMG 750 (750 Lumens) ⁶	<input type="checkbox"/> B401 <input type="checkbox"/> B438	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> Green
<input type="checkbox"/> 1X13	<input type="checkbox"/> (M) Magnetic ¹	<input type="checkbox"/> 120	<input type="checkbox"/> EMG 1300 (1300 Lumens) ⁶	<input type="checkbox"/> B402 <input type="checkbox"/> B439	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> Yellow
<input type="checkbox"/> 1X18*	<input type="checkbox"/> (S) Energy Star ²	<input type="checkbox"/> 277	<input type="checkbox"/> EMG-D-750 (750 Lumens) ⁷	<input type="checkbox"/> B406 <input type="checkbox"/> B471	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> Pink
<input type="checkbox"/> 1X26*		<input type="checkbox"/> 347	<input type="checkbox"/> ICE-1300 (1300 Lumens) ⁸	<input type="checkbox"/> B407 <input type="checkbox"/> B473	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> Brown
				<input type="checkbox"/> B420 <input type="checkbox"/> B444	<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> Navy Blue
				<input type="checkbox"/> B462		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Orange
				<input type="checkbox"/> B452		<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> Blue
				<input type="checkbox"/> B455		<input type="checkbox"/> SHZ		<input type="checkbox"/> White
				<input type="checkbox"/> B451				<input type="checkbox"/> Red
				<input type="checkbox"/> B454				
				<input type="checkbox"/> B437				

¹ - (M) Magnetic = Available only in 9W fixture and not available in MVOLT • ² - (S) Energy Star = Available on selected fixtures only, please see list above • ³ - MARK 7 = Not available in 9W, 13W, 57W, 70W • ⁴ - MARK 10 = Not available in 9W, 13W, 57W, 70W, must specify voltage • ⁵ - LUT-E (EC3D) = Not available in 9W, 13W, 57W, 70W • ⁶ - EMG = Emergency battery pack w/ remote test switch • ⁷ - EMG-D = Emergency battery pack w/ remote test switch for damp location • ⁸ - ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • ⁹ - FUSE = Single slow-blow fuse • ¹⁰ - RIF = Radio interference filter

Specifications:

B4PL

WATT BALLAST VOLTAGE AIR-SHUT EMERGENCY OPTIONS TRIM TYPE REFLECTOR BAFFLE RING GLASS

Sample of Catalog Number: B4PL-1X26-E-MVOLT-EMG750-B401W-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

4" CFL Trims

(LAMP WATTAGE: UP TO 26W)

Catalog Number:

Project Name:

Type:

Note:


elite LIGHTING

**B401CP-CP
STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B402CP-WH
REFLECTOR**




REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B406P-WH
WALL WASH WITH BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

**TRIM/RING/COVER
FINISH:**
WH, BK




**B407CL-WH
WALL WASH WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB, BZ,
CP, SN, SHZ


**TRIM/RING/COVER
FINISH:**
WH, BK



**B420-GREEN
GLASS TRIM**



GLASS FINISH:
GREEN, YELLOW,
PINK, BROWN, NAVY
BLUE, ORANGE,
WHITE, RED




**B462CL-WH
SEMI-FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B452CP
ALBALITE LENS**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B455PB
FRESNEL LENS**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B451PB
DROP OPAL LENS**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B454CP-WH
CLEAR LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B437WH
SMOOTH FROST SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B438WH
DESIGNER SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B439WH
SMOOTH FROST DOME SHOWER LITE**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B471CP-WH
SQUARE STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B473CP-WH
SQUARE REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B444CL-WH
SQUARE FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011