

B4PLIC-E

4" Miniature Compact Fluorescent IC Housing

LAMP WATTAGE: UP TO 26W

Catalog Number:

Project Name:

Type:

Note:

elite LIGHTING

DESCRIPTION

Small aperture thermally protected, specification grade compact fluorescent IC housing. Accommodates (1) 26W PL Double Twin Tube Compact fluorescent lamp. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

SPECIFICATION


A. OUTER HOUSING - Die formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box can be accessed from inside and outside housing.

B. SOCKET - One vertically mounted plug-in socket. Unitized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

C. BALLAST - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Advance or Universal.

D. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

E. JUNCTION BOX - has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

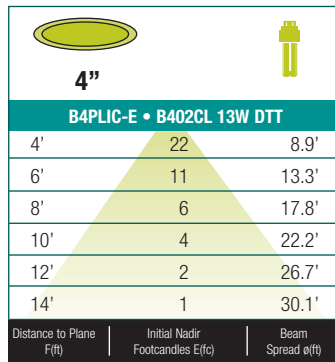

BEAM DIA. MEASURED AT 50% OF NADIR F.C.


FEATURES

- Thermally Protected Miniature Compact Fluorescent IC housing.
- Integral fluorescent ballast.
- Wire through junction box
- Preinstalled adjustable bar hanger
- Dependable, favorable design and effortless installation.
- 6-1/2" height allows use in 2" x 8" joist construction.
- Special screw on the frame locks bar hangers in place which prevents the housing from any movement once installed.

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

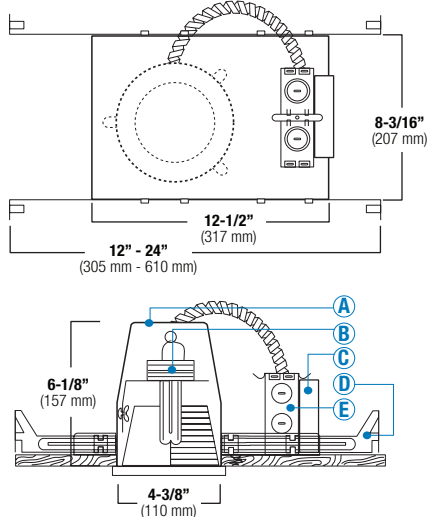

SAME DAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

B4PLIC-E - ITEM SELECTOR: (Please check the boxes below for the option desired)

| WATTAGE | BALLAST | VOLTAGE | EMERGENCY OPTIONS | TRIM TYPE | BAFFLE | REFLECTOR | TRIM/RING | GLASS |
|--------------------------------|---|--|--|---|-----------------------------|------------------------------|-----------------------------|------------------------------------|
| <input type="checkbox"/> 1X13 | <input type="checkbox"/> (E) Electronic | <input type="checkbox"/> MVOLT (120/277) | <input type="checkbox"/> EMG 750 (750 Lumens) ⁶ | <input type="checkbox"/> B401 <input type="checkbox"/> B438 | <input type="checkbox"/> W | <input type="checkbox"/> CL | <input type="checkbox"/> WH | <input type="checkbox"/> Green |
| <input type="checkbox"/> 1X18* | <input type="checkbox"/> (S) Energy Star ² | <input type="checkbox"/> 120 | <input type="checkbox"/> EMG 1300 (1300 Lumens) ⁶ | <input type="checkbox"/> B402 <input type="checkbox"/> B439 | <input type="checkbox"/> P | <input type="checkbox"/> RG | <input type="checkbox"/> BK | <input type="checkbox"/> Yellow |
| <input type="checkbox"/> 1X26* | | <input type="checkbox"/> 277 | <input type="checkbox"/> EMG-D-750 (750 Lumens) ⁷ | <input type="checkbox"/> B406 <input type="checkbox"/> B471 | <input type="checkbox"/> SN | <input type="checkbox"/> W | <input type="checkbox"/> SN | <input type="checkbox"/> Pink |
| | | <input type="checkbox"/> 347 | <input type="checkbox"/> ICE-1300 (1300 Lumens) ⁸ | <input type="checkbox"/> B407 <input type="checkbox"/> B473 | <input type="checkbox"/> CP | <input type="checkbox"/> MB | <input type="checkbox"/> CP | <input type="checkbox"/> Brown |
| | | | | <input type="checkbox"/> B420 <input type="checkbox"/> B444 | <input type="checkbox"/> BZ | <input type="checkbox"/> BZ | <input type="checkbox"/> CH | <input type="checkbox"/> Navy Blue |
| | | | | <input type="checkbox"/> B462 | | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Orange |
| | | | | <input type="checkbox"/> B452 | | <input type="checkbox"/> SN | <input type="checkbox"/> BZ | <input type="checkbox"/> Blue |
| | | | | <input type="checkbox"/> B455 | | <input type="checkbox"/> SHZ | | <input type="checkbox"/> White |
| | | | | <input type="checkbox"/> B451 | | | | <input type="checkbox"/> Red |
| | | | | <input type="checkbox"/> B454 | | | | |
| | | | | <input type="checkbox"/> B437 | | | | |

¹ - (M) Magnetic = Available only in 9W fixture and not available in MVOLT • ² - (S) Energy Star = Available on selected fixtures only, please see list above • ³ - MARK 7 = Not available in 9W, 13W, 57W, 70W • ⁴ - MARK 10 = Not available in 9W, 13W, 57W, 70W, must specify voltage • ⁵ - LUT-E (EC3D) = Not available in 9W, 13W, 57W, 70W • ⁶ - EMG = Emergency battery pack w/ remote test switch • ⁷ - EMG-D = Emergency battery pack w/ remote test switch for damp location • ⁸ - ICE = Emergency battery pack w/ remote test switch operating between -18°C and 55°C • ⁹ - FUSE = Single slow-blow fuse • ¹⁰ - RIF = Radio interference filter

Specifications:

B4PLIC-E - WATT - BALLAST - VOLTAGE - AIR-SHUT - EMERGENCY - OPTIONS - TRIM TYPE - REFLECTOR - BAFFLE - RING - GLASS

Sample of Catalog Number: B4PLIC-E-1X26-E-MVOLT-EMG750-B401W-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

4" CFL Trims

(LAMP WATTAGE: UP TO 26W)

Catalog Number:

Project Name:

Type:

Note:


elite LIGHTING

**B401CP-CP
STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B402CP-WH
REFLECTOR**




REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B406P-WH
WALL WASH WITH BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

**TRIM/RING/COVER
FINISH:**
WH, BK




**B407CL-WH
WALL WASH WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB, BZ,
CP, SN, SHZ


**TRIM/RING/COVER
FINISH:**
WH, BK



**B420-GREEN
GLASS TRIM**



GLASS FINISH:
GREEN, YELLOW,
PINK, BROWN, NAVY
BLUE, ORANGE,
WHITE, RED




**B462CL-WH
SEMI-FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B452CP
ALBALITE LENS**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B455PB
FRESNEL LENS**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B451PB
DROP OPAL LENS**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B454CP-WH
CLEAR LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN


TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B437WH
SMOOTH FROST SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B438WH
DESIGNER SHOWER LITE**




TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



**B439WH
SMOOTH FROST DOME SHOWER LITE**



TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B471CP-WH
SQUARE STEPPED BAFFLE**



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B473CP-WH
SQUARE REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




**B444CL-WH
SQUARE FROSTED LENS WITH REFLECTOR**



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011