


# B5-GU24-IC

## 5" Compact Fluorescent GU24 IC Housing

LAMP WATTAGE: (1) MAXIMUM 26W GU24



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

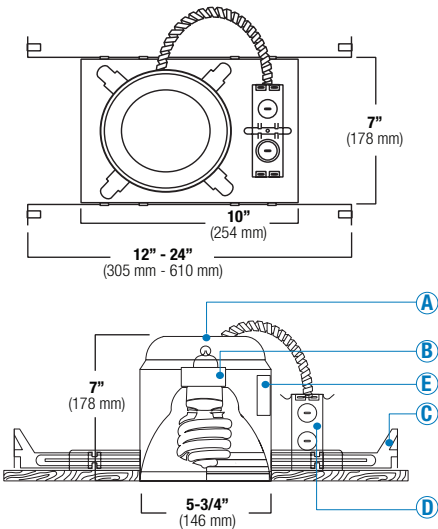

Catalog Number:	
Project Name:	Type:
Note:	

**DESCRIPTION**  
New construction, thermally protected, IC rated specification grade recessed housing. Accommodates up to 26W GU24 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

**SPECIFICATION**  
**A. HOUSING** - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

**B. SOCKET** - GU24 BASE is screwed to the top of housing but can be removed to snap into socket supporting trims.

**C. BAR HANGERS** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

**D. JUNCTION BOX** - UL listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

**E. THERMAL PROTECTION** - Standard thermal protection device guards against improper installation, over-lamping and misuse of insulation material.

120V



GU24 SOCKET

- FEATURES**
- Thermally Protected IC housing.
  - Wire through junction box.
  - Preinstalled adjustable bar hanger.
  - Dependable, favorable design and effortless installation.
  - 7" height allows use in 2" x 8" joist construction.
  - Special screw on the frame locks bar hangers in place which prevents the housing from any movement once installed.

- OPTIONS**  
**AIR-SHUT**
- Gasket to prevent air flow from heated or air conditioned spaces.
  - Meets all national air flow requirements.
  - Lamp must be ordered separately (please consult factory)



B5-GU24-IC - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	VOLTAGE	AIR-SHUT	OTHER OPTION	TRIM TYPE		BAFFLE	REFLECTOR	TRIM/RING	GLASS
Maximum lamp wattage 19W, see specific trims for details	<input type="checkbox"/> 120	<input type="checkbox"/> AT	<input type="checkbox"/> W - With Quick Connector	<input type="checkbox"/> B530	<input type="checkbox"/> B542	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> Green
				<input type="checkbox"/> B507	<input type="checkbox"/> B504L	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> Yellow
				<input type="checkbox"/> B565	<input type="checkbox"/> B501L	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> Pink
				<input type="checkbox"/> B520	<input type="checkbox"/> B505L	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> Brown
				<input type="checkbox"/> B525		<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> Navy Blue
				<input type="checkbox"/> B504			<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Orange
				<input type="checkbox"/> B501			<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> Blue
				<input type="checkbox"/> B505			<input type="checkbox"/> SHZ		<input type="checkbox"/> White
				<input type="checkbox"/> B535					<input type="checkbox"/> Red
				<input type="checkbox"/> B536					
				<input type="checkbox"/> B541					

### Specifications:

B5-GU24-IC

VOLTAGE - AIR-SHUT - OPTIONS - TRIM TYPE - REFLECTOR - BAFFLE - RING - GLASS

BAFFLE	REFLECTOR	TRIM/RING
W White	CL Chrome	WH White
P Black	RG Gold	BK Black
SN Satin Nickel	W White	SN Satin Nickel
CP Copper	MB Black	CP Copper
BZ Bronze	BZ Bronze	CH Chrome
	CP Copper	PB Polish Brass
	SN Satin Nickel	BZ Bronze
	SHZ Satin Haze	

Sample of Catalog Number: B5-GU24-IC-AT-W-B530W-WH

\*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ [www.iuseelite.com](http://www.iuseelite.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011