


# B5RIC

## 5" Universal IC Remodel Housing

LAMP WATTAGE: (1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

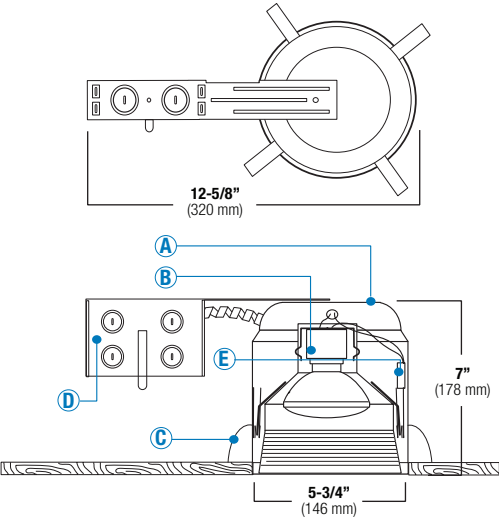

ITEM SELECTOR: (Please check the boxes below for the option desired)

TYPE	AIR-SHUT	OPTION	TRIM TYPE		BAFFLE	REFLECTOR	TRIM/RING	GLASS
B5RIC	<input type="checkbox"/> AT	<input type="checkbox"/> (W) With quick connects	<input type="checkbox"/> B530 <input type="checkbox"/> B507 <input type="checkbox"/> B563 <input type="checkbox"/> B502 <input type="checkbox"/> B520 <input type="checkbox"/> B573 <input type="checkbox"/> B504 <input type="checkbox"/> B501 <input type="checkbox"/> B505 <input type="checkbox"/> B535 <input type="checkbox"/> B536	<input type="checkbox"/> B541 <input type="checkbox"/> B542 <input type="checkbox"/> B504L <input type="checkbox"/> B501L <input type="checkbox"/> B505L	<input type="checkbox"/> W <input type="checkbox"/> P <input type="checkbox"/> SN <input type="checkbox"/> CP <input type="checkbox"/> BZ	<input type="checkbox"/> CL <input type="checkbox"/> RG <input type="checkbox"/> W <input type="checkbox"/> MB <input type="checkbox"/> BZ <input type="checkbox"/> CP <input type="checkbox"/> SN <input type="checkbox"/> SHZ	<input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SN <input type="checkbox"/> CP <input type="checkbox"/> CH <input type="checkbox"/> PB <input type="checkbox"/> BZ	<input type="checkbox"/> Green <input type="checkbox"/> Yellow <input type="checkbox"/> Pink <input type="checkbox"/> Brown <input type="checkbox"/> Navy Blue <input type="checkbox"/> Orange <input type="checkbox"/> Blue <input type="checkbox"/> White <input type="checkbox"/> Red

### Specifications:

B5RIC

AIR-SHUT      OPTION      TRIM TYPE      BAFFLE      REFLECTOR      TRIM/RING      GLASS

BAFFLE	REFLECTOR	TRIM/RING
W White P Black SN Satin Nickel CP Copper BZ Bronze	CL Chrome RG Gold W White MB Black BZ Bronze CP Copper SN Satin Nickel SHZ Satin Haze	WH White BK Black SN Satin Nickel CP Copper CH Chrome PB Polish Brass BZ Bronze

Sample of Catalog Number: B5RIC-AT-W-B530-W-WH

\*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.



Submittal form is available @ [www.iuseelite.com](http://www.iuseelite.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.  
REV: ELITE LIGHTING-SPEC-06-29-2011

Catalog Number:

Project Name:

Type:

Note:



### DESCRIPTION

Thermally protected, IC rated specification grade remodel recessed housing. For remodeling installations where housing will be in direct contact with insulation. For fast and easy installation in existing plaster or mechanical ceilings from 1/2" to 1-3/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with a strain relief. Accommodates up to 75W PAR30, R30 lamps, 60W A19 lamps and 65W BR30 lamps.

### SPECIFICATION


**A. HOUSING** - Die-formed, all aluminum construction for maximum heat dissipation and rust protection.

**B. SOCKET** - Medium base screw shell porcelain socket snaps into trim to allow usage of different lamp types, as well as proper and consistent lamp positioning.

**C. INSTALLATION** - Four Preinstalled spring clips which secure the housing firmly into ceiling and accommodate ceiling thickness from 1/2" to 1-3/8".

**D. JUNCTION BOX** - UL listed for feed through wiring, provided with eight 1/2" KOs and four Romex knockouts with strain relief.

**E. THERMAL PROTECTION** - Standard thermal protection device guards against improper installation, overlampping and misuse of insulation material.

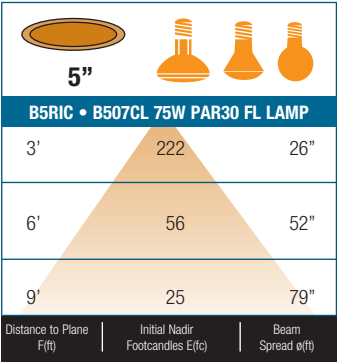

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

### FEATURES

- Thermally Protected IC Remodel housing.
- Dependable, favorable design and effortless installation.
- Unit slips through 5-1/2" ceiling opening.
- Four Preinstalled spring clips which secure the housing firmly into ceiling to accommodate ceiling thickness from 1/2" to 1-3/8".
- Can be installed from below the ceiling.
- 7" height allows use in 2" x 8" joist construction.
- Wire through junction box.
- Preinstalled socket cap provides electrical contact protection against dust, paint and over spray.

### OPTIONS

#### AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

#### UL AND C-UL LISTED

- For Damp location
- For Feed-through wiring
- For Direct contact with insulation

# 5" Incandescent Trims

( LAMP WATTAGE: 75W R/PAR30, 60W A19, 65W BR30 )

Catalog Number:

Project Name:

Type:


Note:

**elite** LIGHTING

**B530CP-CP  
STEPPED BAFFLE**




**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ




**B507RG-WH  
REFLECTOR**




**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, W-WH, RG-WH, MB-WH, CL-WH, MB-BK, RG-PB, CL-CH



**B563PB  
PAR30 GIMBAL TRIM**




**TRIM/RING FINISH:**  
WH, BK, SN, CP, CH, PB, BZ




**B502SN  
EYEBALL**




**TRIM/RING FINISH:**  
WH, BK, SN, CP, CH, PB, BZ



**B520-NAVY BLUE  
GLASS TRIM**




**GLASS FINISH:**  
GREEN, YELLOW, PINK, BROWN, NAVY BLUE, ORANGE, WHITE, RED



**B573W-WH  
PAR30 BAFFLE W/ GIMBAL RING**



**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, SN-SN, W-WH, P-WH, P-BK




**B504WH  
SHOWER TRIM**



FOR  
**WET**  
LOCATION

**TRIM/RING FINISH:**  
WH, BK, SN, CP, CH, BZ




**B501CP  
METAL ALBALITE LENS**



FOR  
**WET**  
LOCATION

**TRIM/RING FINISH:**  
WH, BK, SN, CP, CH, BZ




**B505SN  
METAL FRESNEL LENS**



FOR  
**WET**  
LOCATION

**TRIM/RING FINISH:**  
WH, BK, SN, CP, CH, BZ




**B535P-WH  
BAFFLE WITH ALBALITE LENS**



FOR  
**WET**  
LOCATION

**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, SN-SN, W-WH, P-WH, P-BK




**B536W-WH  
BAFFLE WITH FRESNEL LENS**



FOR  
**WET**  
LOCATION

**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, SN-SN, W-WH, P-WH, P-BK




**B541RG-WH  
REFLECTOR WITH ALBALITE LENS**



FOR  
**WET**  
LOCATION

**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, W-WH, RG-WH, MB-BK, CL-WH, MB-BK, RG-PB, CL-CH




**B542CL-WH  
REFLECTOR WITH FRESNEL LENS**



FOR  
**WET**  
LOCATION

**AVAILABLE COLOR COMBINATIONS:**  
CP-CP, W-WH, RG-WH, MB-BK, CL-WH, MB-BK, RG-PB, CL-CH




**B504L  
PLASTIC SHOWER TRIM**



FOR  
**WET**  
LOCATION

**TRIM/RING FINISH:**  
WHITE PLASTIC




**B501L  
PLASTIC ALBALITE LENS**



FOR  
**WET**  
LOCATION

**TRIM/RING FINISH:**  
WHITE PLASTIC




**B505L  
PLASTIC FRESNEL LENS**



FOR  
**WET**  
LOCATION

**TRIM/RING FINISH:**  
WHITE PLASTIC



**elite** LIGHTING

Submittal form is available @ [www.iuseelite.com](http://www.iuseelite.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011