

B62PLIC

6" Dual Lamp Compact Fluorescent IC Housing

LAMP WATTAGE: UP TO 2X13W

Catalog Number:

Project Name:


Type:

Note:

elite LIGHTING



DESIGNED FOR 2" X 8" JOIST CONSTRUCTION

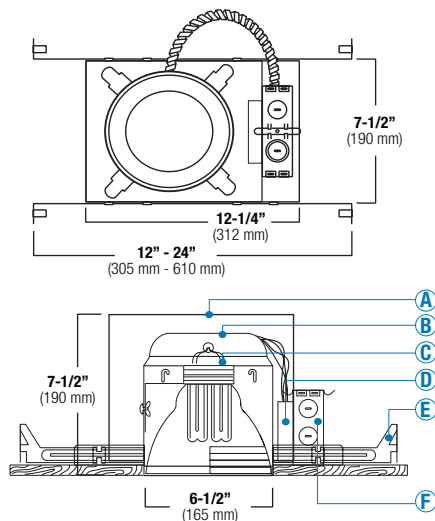

DESCRIPTION

Thermally protected, specification grade compact fluorescent IC housing. For new construction where housing will be in direct contact with insulation. Accommodates (2) 13W PL Double Twin Tube Compact fluorescent lamp. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four 1/2" KOs, one 3/4" KO and four Romex knockouts with strain relief.

SPECIFICATION

A. OUTER HOUSING - Die formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.


B. INNER HOUSING - Die-formed, all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

C. SOCKET - Two vertically mounted plug-in socket. Unit-sized optics guarantees proper trim to housing installation. Tool-less installation adjusts from inside the housing.

D. BALLAST - Thermally protected, current controlled ballast, will produce full light output, increase lamp life with no noise and flicker. Ballast supplied is manufactured by Advance.

E. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. They contain a double-headed real nail for 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

F. JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

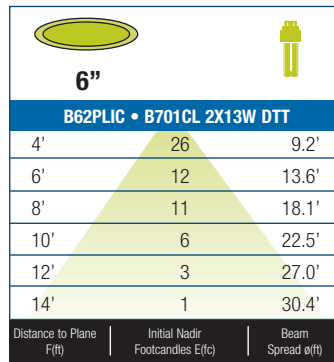

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

FEATURES

- Integral fluorescent ballast.
- Thermally Protected IC housing.
- Adjustable socket bracket.
- Wire through junction box.
- Preinstalled adjustable bar hanger.
- Dependable, favorable design, effortless installation.
- 7-1/4" height allows use in 2" x 8" joist construction.
- Special screw on the frame locks bar hangers in place which prevents the housing from any movement once installed.

OPTIONS

AIR-SHUT

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

SAME DAY SHIPPING

PROUDLY ASSEMBLED IN AMERICA



Title 24 Approved only if ordered with electronic ballast and Air-Shut.

B62PLIC - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	VOLTAGE	EMERGENCY OPTIONS	TRIM TYPE			BAFFLE	REFLECTOR	TRIM/RING	GLASS
<input type="checkbox"/> 2X13W	<input type="checkbox"/> (E) Electronic	<input type="checkbox"/> 120	<input type="checkbox"/> EMG 750 (750 Lumens) ⁶	<input type="checkbox"/> B701	<input type="checkbox"/> B706	<input type="checkbox"/> B736	<input type="checkbox"/> W	<input type="checkbox"/> CL	<input type="checkbox"/> WH	<input type="checkbox"/> Green
	<input type="checkbox"/> (M) Magnetic ¹	<input type="checkbox"/> 277	<input type="checkbox"/> EMG 1300 (1300 Lumens) ⁶	<input type="checkbox"/> B702	<input type="checkbox"/> B706L	<input type="checkbox"/> B757	<input type="checkbox"/> P	<input type="checkbox"/> RG	<input type="checkbox"/> BK	<input type="checkbox"/> Yellow
	<input type="checkbox"/> (S) Energy Star ²		<input type="checkbox"/> EMG-D-750 (750 Lumens) ⁷	<input type="checkbox"/> B620	<input type="checkbox"/> B707	<input type="checkbox"/> B758	<input type="checkbox"/> SN	<input type="checkbox"/> W	<input type="checkbox"/> SN	<input type="checkbox"/> Pink
			<input type="checkbox"/> ICE-1300 (1300 Lumens) ⁸	<input type="checkbox"/> B703	<input type="checkbox"/> B707L	<input type="checkbox"/> B760	<input type="checkbox"/> CP	<input type="checkbox"/> MB	<input type="checkbox"/> CP	<input type="checkbox"/> Brown
				<input type="checkbox"/> B704	<input type="checkbox"/> B743	<input type="checkbox"/> B759	<input type="checkbox"/> BZ	<input type="checkbox"/> BZ	<input type="checkbox"/> CH	<input type="checkbox"/> Navy Blue
				<input type="checkbox"/> B751	<input type="checkbox"/> B756	<input type="checkbox"/> B788		<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Orange
	DIMMING	AIR-SHUT	OTHER OPTIONS	<input type="checkbox"/> B752	<input type="checkbox"/> B741	<input type="checkbox"/> B785		<input type="checkbox"/> SN	<input type="checkbox"/> BZ	<input type="checkbox"/> Blue
	<input type="checkbox"/> Mark 7 ³	<input type="checkbox"/> AT	<input type="checkbox"/> FUSE ⁹	<input type="checkbox"/> B753	<input type="checkbox"/> B742	<input type="checkbox"/> B796		<input type="checkbox"/> SHZ		<input type="checkbox"/> White
			<input type="checkbox"/> RIF ¹⁰	<input type="checkbox"/> B754	<input type="checkbox"/> B737	<input type="checkbox"/> B780				<input type="checkbox"/> Red
				<input type="checkbox"/> B705	<input type="checkbox"/> B755	<input type="checkbox"/> B789				
				<input type="checkbox"/> B705L	<input type="checkbox"/> B735					

(Note: CA Title 24 approved only if ordered with electronic ballast and Air-Shut.) 1- (M) Magnetic = Available only in 9W fixture and not available in MVOLT • 2- (S) Energy Star = Available on selected fixtures only, please see list above • 3- MARK 7 = Not available in 9W, 13W, 57W, 70W • 4- MARK 10 = Not available in 9W, 13W, 57W, 70W, must specify voltage • 5- LUT-E (EC3D) = Not available in 9W, 13W, 57W, 70W • 6- EMG = Emergency battery pack w/ remote test switch • 7- EMG-D = Emergency battery pack w/ remote test switch for damp location • 8- ICE = Emergency battery pack w/ remote test switch • 9- FUSE = Single slow-blow fuse • 10- RIF = Radio interference filter

Specifications:

B62PLIC

WATT BALLAST VOLTAGE AIR-SHUT EMERGENCY OPTIONS TRIM TYPE REFLECTOR BAFFLE RING GLASS

Sample of Catalog Number: B62PLIC-2X13W-E-120-EMG750-B701CL-WH

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: ELITE LIGHTING-SPEC-06-29-2011

6" CFL Trims

(LAMP WATTAGE: UP TO 2X13W)

Catalog Number:

Project Name:

Type:


Note:

elite LIGHTING

B701CP-WH CONE REFLECTOR




AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, SHZ-WH, RG-WH, W-WH, MB-WH, CP-CP, SN-SN



B702P-RG-WH CONE REFLECTOR/BAFFLE TRIM




BAFFLE FINISH:
W, P
REFLECTOR FINISH:
CL, RG
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B620-NAVY BLUE GLASS TRIM




GLASS FINISH:
GREEN, YELLOW, PINK, BROWN, NAVY BLUE, ORANGE, WHITE, RED



B703RG-WH WALL WASH REFLECTOR



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN
COVER FINISH:
WH, BK



B704W-CL REFLECTOR BAFFLE WALL WASH




BAFFLE FINISH:
W, P
REFLECTOR FINISH:
CL, RG
COVER FINISH:
WH, BK



B751WH SMOOTH FROST DOME SHOWER LENS




LENS:
FROSTED
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B752WH DESIGNER POINT SHOWER LENS




LENS:
FROSTED/CLEAR
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B753WH DESIGNER CONE SHOWER LENS




LENS:
FROSTED
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B754WH SMOOTH FROST SHOWER LENS




LENS:
FROSTED
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B705CP METAL ALBALITE LENS




LENS:
ALBALITE
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B705L PLASTIC ALBALITE LENS




LENS:
ALBALITE
TRIM/RING FINISH:
WHITE PLASTIC



B706PB METAL FRESNEL LENS



LENS:
FRESNEL
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B706L PLASTIC FRESNEL LENS



LENS:
FRESNEL
TRIM/RING FINISH:
WHITE PLASTIC



B707CP METAL DROP OPAL LENS



LENS:
DROP OPAL
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B707L PLASTIC DROP OPAL LENS




LENS:
DROP OPAL
TRIM/RING FINISH:
WHITE PLASTIC



B743RG-WH REFLECTOR W/ DROP OPAL LENS



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN
TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011

6" CFL Trims

(LAMP WATTAGE: UP TO 2X13W)

Catalog Number:

Project Name:

Type:

Note:


elite LIGHTING

B756CL-WH
REFLECTOR W/ PRISMATIC LENS




REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B741RG-WH
REFLECTOR W/ ALBALITE LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B742CL-WH
REFLECTOR W/ FRESNEL LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B737W-WH
BAFFLE W/ DROP OPAL LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B755W-WH
BAFFLE W/ PRISMATIC LENS




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B735P-WH
BAFFLE W/ ALBALITE LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B736W-WH
BAFFLE W/ FRESNEL LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B757W-WH
BAFFLE W/ FROSTED DOME SHOWER LENS




BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ



B758CL-WH
REFLECTOR W/ FROSTED DOME SHOWER LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B760W-WH
BAFFLE W/ FROSTED LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B759CL-WH
REFLECTOR W/ FROSTED LENS



REFLECTOR FINISH:
CL, RG, W, MB,
CP, SN

TRIM/RING FINISH:
WH, BK, SN, CP, CH,
PB, BZ




B788WH
SQUARE ALBALITE SHOWER LENS



LENS:
WHITE

TRIM/RING FINISH:
WH




B785WH
SQUARE FRESNEL LENS



LENS:
FROSTED

TRIM/RING FINISH:
WH




B796WH
SQUARE SMOOTH FROST DOME LENS



LENS:
FROSTED

TRIM/RING FINISH:
WH




B780WH
SQUARE DESIGNER POINT LENS



LENS:
FROSTED/CLEAR

TRIM/RING FINISH:
WH




B789WH
SQUARE DESIGNER CONE LENS



LENS:
FROSTED

TRIM/RING FINISH:
WH



elite LIGHTING

Submittal form is available @ www.iuseelite.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011