

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

**SPECIFICATION**

**HOUSING** - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

**DRIVER** - Class II dimming electronic driver.

**BAR HANGERS** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

**JUNCTION BOX** - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

**OPTION**


**1. AIR-SHUT-**

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

25,000 hrs  
RATED LIFE




TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	120	AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP		
	<input type="checkbox"/> LED7DMR16/827/15		
<input type="checkbox"/> LED7DMR16/827/25			
<input type="checkbox"/> LED7DMR16/827/35			

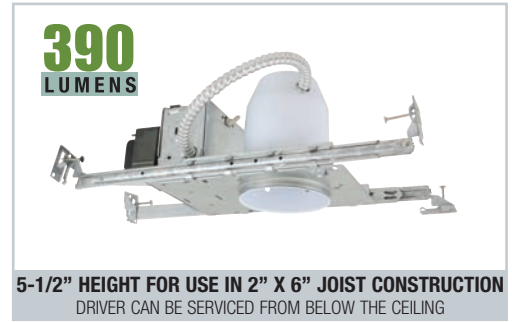

**DESCRIPTION**

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction Non insulated ceilings or where insulation can be kept 3" from the housing, furnished with preinstalled adjustable bar hangers.

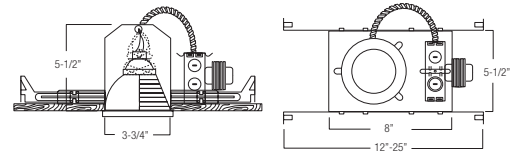

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

**SPECIFICATION**

**HOUSING** - High temperature painted 22 gauge deep drawn single piece housing.

**DRIVER** - Class II dimming electronic driver.

**JUNCTION BOX** - through-branch circuit wiring and has eight 1/2" KOs and four Romex knockouts with strain relief.

**INSTALLATION** - Three preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thickness from 1/2" to 1-3/8".

**OPTION:**


**1. AIR-SHUT-**

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

25,000 hrs  
RATED LIFE




TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3R-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	120	AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP		
	<input type="checkbox"/> LED7DMR16/827/15		
<input type="checkbox"/> LED7DMR16/827/25			
<input type="checkbox"/> LED7DMR16/827/35			

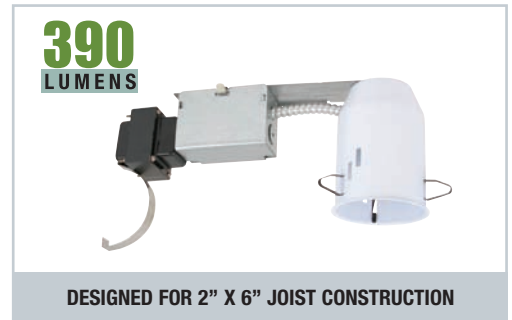

**DESCRIPTION**

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, For Remodel Construction with three remodel clips are easily retractable for fixture removal if necessary. Non insulated ceilings or where insulation can be kept 3" from the housing.

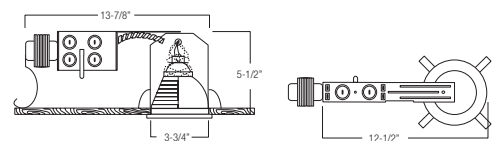

3 INCH DEDICATED MR16 LED NON-IC HOUSING


# 3" LOW VOLTAGE TRIMS

**B1326CL-WH**  
The Illuminator II



*Illuminator*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, W-WH




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1366CL-WH**  
The Illuminator



*Illuminator*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-SN




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1303WH**  
Slot Aperture



*Apertura*

TRIM:  
WH, BK, CH, PB, CP,  
SN, BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1314P-WH**  
Pinhole with Baffle



*Forte*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1315RG-WH**  
Pinhole with Reflector



*Forte*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-SN, RG-WH,  
MB-WH, W-WH, CP-CP




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1362WH**  
Shower Trim w/ Frosted Lens



*Aqua*

TRIM:  
WH, BK, CH, PB, CP,  
SN, BZ



PATENT #: D510,151


HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1352WH**  
Shower Trim w/ Reflector



*Aqua*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-CH, CL-SN,  
RG-WH, RG-PB,  
MB-WH, SN-WH,  
W-WH




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1306WH**  
Fully Adjustable (75° Tilt, 359° Rot.)



*Galleria*

TRIM:  
WH, BK, CH, PB, CP,  
SN, BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 4**

**B1312SN**  
Fully Adjustable (35° Tilt)



*Galleria*

TRIM:  
WH, BK, CH, PB, CP,  
SN, BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1368W-WH**  
Fully Adjustable w/ Baffle (35° Tilt)



*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1304W-WH**  
Eyeball w/ Baffle (47° Tilt)



*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1377CL-WH**  
Crossblade Reflector



*Radiance*

AVAILABLE COLOR COMBINATION:  
CL-WH




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1313P-SN**  
Pull Down Adjustable



*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-SN,  
CP-CP



HOUSING COMPATIBILITY GUIDE:  
**1 2**

ALL TRIMS ABOVE ARE PATENT PENDING

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL3IC, BL3, BL3R	50W 12V MR16
2	BL3-75	75W 12V MR16
3	G3IC, G3, G3R	50W 120V GU10
4	BL30IC-E, BL3E-S, BL3RE-S	35W 12V MR16

**BAFFLE FINISH:**

- W** White
- P** Black
- SN** Satin Nickel
- CP** Copper
- BZ** Bronze

**REFLECTOR FINISH:**

- CL** Chrome
- RG** Gold
- W** White
- MB** Black

**RING/TRIM FINISH:**

- BZ** Bronze
- CP** Copper
- SHZ** Satin Haze
- WH** White
- BK** Black
- SN** Satin Nickel
- CP** Copper
- CH** Chrome
- PB** Polish Brass
- BZ** Bronze



General Lighting



Accent Lighting



Task Lighting



Wall Wash Lighting



Sloped Ceiling Lighting

3 INCH LOW VOLTAGE TRIMS

**B1396CP**  
Square Baffle w/ Square Trim Ring




*Forte*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT PENDING

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1378SN-SN**  
Stepped Baffle (35° Tilt)




*Spectrum*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1379CL-CH**  
Reflector (35° Tilt)




*Radiance*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-CH, CL-SN,  
RG-WH, SN-SN, SN-WH,  
W-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1383WH**  
Slot Aperture (35° Tilt)




*Apertura*

TRIM:  
BZ, WH


PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1380WH**  
Fully Adjustable (35° Tilt, 359° Rot.)




*Galleria*

TRIM:  
WH, BK, BZ, CH, SN, CP

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1384P-WH**  
Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)




*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ


PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1386WH**  
Fully Adjustable (75° Tilt, 359° Rot.)




*Galleria*

TRIM:  
WH, BK, SN, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2



**B1395CL-SN**  
Semi-Frosted Shower Trim



FOR WET LOCATION


*Aqua*

AVAILABLE COLOR COMBINATIONS:  
CL-BK, CL-SN, CL-WH,  
CL-BZ, CP-CP, SN-SN

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1390WH-PEACH**  
Metropolitan Ice Lite




GLASS:  
BLUE, PEACH, FROSTED,  
CLEAR, GREEN, AMBER

TRIM: WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1391P-WH**  
Pinhole with Baffle




*Forte*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1320WH-FROSTED**  
Metropolitan Moon Lite




GLASS:  
BLUE, PEACH, FROSTED,  
CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D508,750

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1325WH-AMBER**  
Metropolitan Step Lite




GLASS:  
BLUE, PEACH, FROSTED,  
CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D509,314

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1324WH-RED**  
Metropolitan Honey Lite




GLASS:  
BLUE, PEACH,  
FROSTED, CRYSTAL,  
GREEN, AMBER, RED

TRIM: WH

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1301CP-CP**  
Stepped Baffle (35° Tilt)




*Spectrum*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1302CP-WH**  
Reflector (35° Tilt)




*Radiance*

AVAILABLE COLOR COMBINATIONS:  
CP-CP, CP-WH, W-WH,  
RG-WH, SN-SN, SN-WH,  
MB-WH, CL-WH, MB-BK,  
RG-PB, CL-CH, CL-SN,  
BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**B1316CL-WH**  
Reflector (35° Tilt)




*Radiance*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-SN, W-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:

1 2 3



**MR16 LENS FILTER**  
BP8MR16-BL BLUE  
BP8MR16-GR GREEN  
BP8MR16-PI PINK  
BP8MR16-PU PURPLE  
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW  
BP8MR16-AM AMBER  
BP8MR16-OR ORANGE  
BP8MR16-RE RED



**CAT. #**  
1. BP8MR16-FR FROSTED SPREAD  
2. BP8MR16-SP SPREAD  
3. BP8MR16-SF SOFT FOCUS  
4. BP8MR16-HC HONEY COMB

**CAT. #**  
5. BP8MR16-LI LINEAR SOLITE  
6. BP8MR16-SOL SOLITE  
7. BP8MR16-CL CLEAR  
8. BP8MR16-UV ULTRAVIOLET

ALL PRODUCTS ARE U.S. AND FOREIGN PATENT PENDING

WWW.IUSEELITE.COM • TEL: 1-877-375-5555 • FAX: 1-877-375-3333



3"

3 INCH LOW VOLTAGE TRIMS

# 3-inch Recessed Diamond Collection

**NEW**

*The new crystal collection from Elite Lighting is more than just a trim, it's a form of art. Brilliant crystal jewels are aligned perfectly to provide a unique and sophisticated appearance to any space. Enhance the appearance of hallways, lobbies or waiting areas into an elegant appealing space. Different size crystals, along with a variety of colors make the Crystal Collection a beautiful masterpiece.*

**B1351CH**  
Ruby I



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1353CH**  
Ruby II



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1354CH**  
Sapphire I



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1355CH**  
Sapphire II



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1356CH**  
Emerald I



**DESCRIPTION:**

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1357CH**  
Emerald II



**DESCRIPTION:**

- All die-cast construction with enhanced amber crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1358CH**  
Topaz I



**DESCRIPTION:**

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1359CH**  
Topaz II



**DESCRIPTION:**

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1360CH**  
Onyx



**DESCRIPTION:**

- All die-cast construction with frosted glass
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



FINISH TRIM	TRIM OUTSIDE DIA.	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
CH - Chrome	3-7/8"	1	BL3IC, BL3, BL3R	50W 12V MR16
		2	BL3-75	75W 12V MR16
		3	G3IC, G3, G3R	50W 120V GU10
		4	BL3ICE-S, BL30IC, BL3E-S, BL3RE-S	35W 12V MR16



3"