
3" Miniature Low Voltage Non-IC Housing

LAMP WATTAGE: (1) MAXIMUM 12V 75W MR16



TRANSFORMER CAN BE SERVICED FROM BELOW THE CEILING





DESCRIPTION

Note:

Catalog Number:

Project Name:

Small aperture low voltage, thermally protected, specification grade recessed housing. For new construction. Non-insulated ceilings or where insulation can be kept 3" from the housing. Accommodates up to 75W MR16 lamps. Furnished with preinstalled adjustable bar hangers. Junction box is provided with four ½" KOs. one ¾" KO and four Romex knockouts with strain relief.


SPECIFICATION

A. HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate ½" to 1-3/8" ceiling. Accommodates lamps up to 50W depending on trim used.

- B. TRANSFORMER Enhanced in heat dissipating cover, to provide noise free operation. Attached to junction box cover so it may be serviced from below the ceiling. Thermally protected.
- M-Class H dimming magnetic transformer.
- E-Class II dimming electronic transformer (LighTech part #LET 75 BF)
- TOR-Class H dimming toroidal transformer, providing 35% more lumens than traditional transformers. Constructed of M3 grade silicone steel.

(Must use dimmers rated for electromagnetic transformer)

- C. BAR HANGERS Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.
- D. JUNCTION BOX through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.



elite LIGHTING

FEATURES

- Integral low voltage transformer to prolong lamp life and increase lighting quality.
- . Thermally Protected Non-IC housing.
- · Designed for accent and task lighting applications.
- · Wire through junction box.
- · Preinstalled adjustable bar hanger.
- · Dependable, favorable design and effortless installation.
- 5-1/2" height allows use in 2" x 6" joist construction.
- Special screw on the frame locks bar hangers in place which prevents the housing from any movement once in-

OPTIONS

- 1. AIR-SHUT
- · Gasket to prevent air flow from heated or air conditioned spaces.
- . Meets all national air flow requirements.

BL3 - ITEM SELECTOR: (Please check the boxes below for the option desired)

WATTAGE	BALLAST	TRIM TYPE				BAFFLE	REFLECTOR	TRIM RING	MR 16 LENS FILTER	
□ 20W	☐ (M) Magnetic	☐ B13511	☐ B1372 ²	□ B1395	□ B1303	□ W	□ CL	□ WH	☐ BP8MR16-BL (Blue)	☐ BP8MR16-FR (Frosted)
□ 35W	☐ (E) Electronic	☐ B1353 ¹	☐ B1374 ²	□ B1390	□ B1314	□Р	□ RG	□ BK	☐ BP8MR16-GR (Green)	☐ BP8MR16-SP (Spread)
□ 50W	☐ (TOR) Toroidal*	☐ B1354 ¹	☐ B1375 ²	□ B1391	□ B1315	□ SN	□ W	□ SN	☐ BP8MR16-PI (Pink)	☐ BP8MR16-SF (Soft Focus)
□ 75W		☐ B1355 ¹	☐ B1376 ²	□ B1320	□ B1362	□ CP	□ MB	□ CP	☐ BP8MR16-PU (Purple)	☐ BP8MR16-HC (Honey Comb)
	VOLTAGE	☐ B13561	□ B1396	□ B1325	□ B1352	□ BZ	□ BZ	□ CH	☐ BP8MR16-DL (Day Light)	☐ BP8MR16-LI (Linear)
	□ 120	☐ B1357 ¹	□ B1378	□ B1324	□ B1306		□ CP	□ PB	☐ BP8MR16-YE (Yellow)	☐ BP8MR16-SOL (Solite)
	□ 277	☐ B1358 ¹	□ B1379	□ B1301	□ B1312		□ SN	□ BZ	☐ BP8MR16-AM (Amber)	☐ BP8MR16-CL (Clear)
		☐ B1359 ¹	□ B1383	□ B1302	□ B1368		□ SHZ	☐ CH¹	☐ BP8MR16-OR (Orange)	☐ BP8MR16-UV (Ultraviolet)
	OPTION	☐ B1360 ¹	□ B1380	□ B1316	□ B1304			☐ SS ²	☐ BP8MR16-RE (Red)	
	☐ AT (Air-Shut)	☐ B1370 ²	□ B1384	□ B1326	□ B1377					
		☐ B1371 ²	□ B1386	□ B1366	□ B1313					

*Toroidal = Available only in 120V

BL3

1 = CH - Chrome finished • 2 = SS - Stainless Steel finished

Specifications: BALLAST VOI TAGE OPTION TRIM TYPE BAFFI F REFLECTOR TRIM/RING FILTER (1) FILTER (2) BAFFLE REFLECTOR CL W P SN CP BZ Black Satin Nickel Copper MB BZ Black SHZ Satin Haze

WH BK SN CP CH Copper Chrome Polish Bra

*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.

Sample of Catalog Number: BL3-20W-E-B1301-W-WH-BP8MR16-BL



3" Low Voltage Trims

(LAMP WATTAGE: 75W 12V MR16 / 50W 120V GU10)

Catalog Number:	
Project Name:	Туре:
Note:	

B1351CH RUBY I



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1353CH RUBY II



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1354CH SAPPHIRE I



O.D.: 3-7/8"

FINISH TRIM: CH (CHROME)

B1355CH SAPPHIRE II



0.D.: 3-7/8"

FINISH TRIM: CH (CHROME)

B1356CH EMERALD



0.D.: 3-7/8" FINISH TRIM: CH (CHROME)

B1357CH EMERALD II



O.D.: 3-7/8"

FINISH TRIM: CH (CHROME)

B1358CH TOPAZ I



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1359CH TOPAZ II



0.D.: 3-7/8" **FINISH TRIM:** CH (CHROME)

B1360CH ONYX



0.D.: 3-7/8" FINISH TRIM: CH (CHROME)

B1370SS ADJ. STAINLESS STEEL GIMBAL TRIM



0.D.: 3-7/8" **FINISH TRIM:** SS (STAINLESS STEEL)

B1371SS STAINLESS STEEL LENSED TRIM



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

STAINLESS STEEL EYEBALL TRIM



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

SQUARE BAFFLE W/ SQUARE TRIM RING

B1374SS

ADJ. STAINLESS STEEL SQUARE GIMBAL TRIM



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

B1375SS

0.D.:

STAINLESS STEEL SQUARE EYEBALL TRIM



J.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)

B1376SS Adj. Stainless Steel Square Eyeball Trim



0.D.: 3-7/8"

FINISH TRIM: SS (STAINLESS STEEL)



TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ



Submittal form is available @ www.iuseelite.com Tel: 323-888-1973 • Fax: 323-888-1977 Specifications and Dimensions subject to change without notice.

REV: MAXILUME-SPEC-05-26-2011

Low Voltage Trims


(LAMP WATTAGE: 75W 12V MR16 / 50W 120V GU10)

Catalog Number:	
Project Name:	Type:
Note:	 عالک

B1378SN-SN STEPPED BAFFLE (35° TILT)




AVAILABLE COLOR COMBINATIONS:CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ



B1379CL-WH **REFLECTOR (35° TILT)**




AVAILABLE COLOR COMBINATIONS: CL-WH, CL-SN, RG-WH, MB-WH, W-WH,MB-BK, RG-PB, SN-SN, CL-CH, CP-CP, CP-WH, SN-WH



B1383WH SLOT APERTURE (35° TILT)



TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ



B1384P-WH **FULLY ADJUSTABLE W/ BAFFLE**



(35° TILT, 359° ROTATION)

AVAILABLE COLOR COMBINATIONS: W-WH, P-WH, P-BK CP-CP, SN-SN, BZ-BZ

B1395CL-SN



B1380WH FULLY ADJUSTABLE (35° TILT, 359° ROT.)



TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ




B1386WH

FULLY ADJUSTABLE (75° TILT, 359° ROT.)





TRIM FINISH: WH, BK, SN, CP, CH, PB, BZ



B1390WH-PEACH METROPOLITAN ICE LITE



TRIM FINISH: WH, BK, SN, CP, CH, PB







SEMI-FROSTED SHOWER TRIM

REFLECTOR FINISH:





B1391P-WH PINHOLE WITH BAFFLE




AVAILABLE COLOR COMBINATIONS: CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ



B1301CP-CP STEPPED BAFFLE




AVAILABLE COLOR **COMBINATIONS:** CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ



B1302CP-WH REFLECTOR



AVAILABLE COLOR **COMBINATIONS:** CP-CP, CP-WH, W-WH, RG-WH, SN-SN, SN-WH, MB-WH, CL-WH, MB-BK



B1316CL-WH **REFLECTOR (35° TILT)**



AVAILABLE COLOR CL-WH, CL-SN, CL-PB



B1326CL-WH THE ILLUMINATOR II



B1366CL-WH THE ILLUMINATOR



RG-PB, CL-CH, CL-SN B1303WH **SLOT APERTURE**



B1314P-WH PINHOLE WITH BAFFLE






elité LIGHTING

3" Low Voltage Trims

Catalog Number:	
Project Name:	Туре:
Note:	alitä:

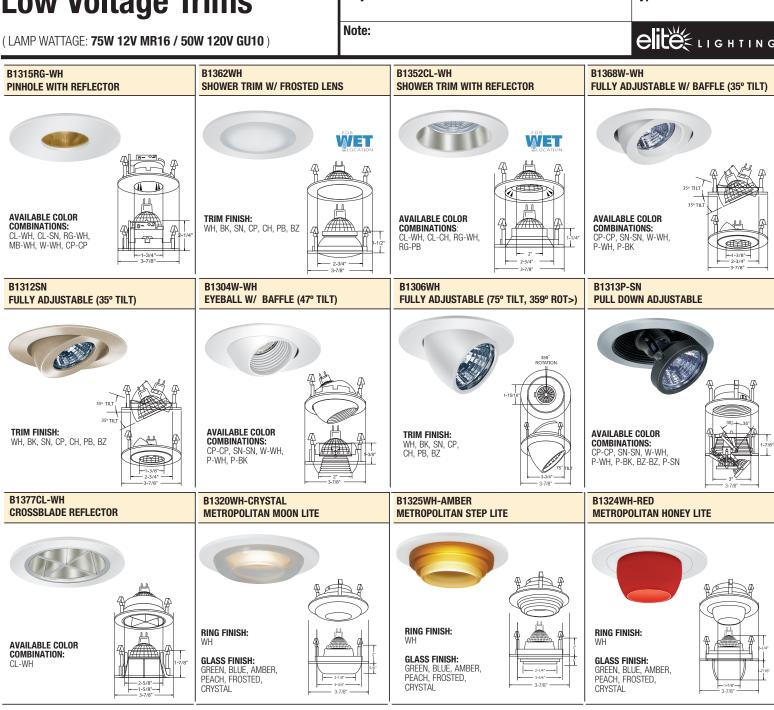



*For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.