

BL3IC-HRS1260M

3" MINIATURE DEDICATED MR16 LED IC HOUSING

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

SPECIFICATION

OUTER HOUSING - Die-formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.

INNER HOUSING - Deep-drawn single piece aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

DRIVER - Class II dimming electronic driver.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

OPTION

1. AIR-SHUT-

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

25,000 hrs
RATED LIFE



390
LUMENS




COMPACT DESIGN

DRIVER CAN BE SERVICED FROM BELOW THE CEILING

DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction IC rated Housing, furnished with preinstalled adjustable bar hangers.

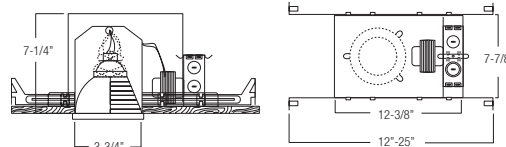

TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3IC-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	120	AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/827/15		
	<input type="checkbox"/> LED7DMR16/827/25		
<input type="checkbox"/> LED7DMR16/827/35			
<input type="checkbox"/> LED7DMR16/NFL/TP			

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

BL3-HRS1260M

3" MINIATURE DEDICATED MR16 LED NON-IC HOUSING

SPECIFICATION

HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

DRIVER - Class II dimming electronic driver.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

OPTION

1. AIR-SHUT-

- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

25,000 hrs
RATED LIFE



390
LUMENS




5-1/2" HEIGHT FOR USE IN 2" X 6" JOIST CONSTRUCTION

DRIVER CAN BE SERVICED FROM BELOW THE CEILING

DESCRIPTION


Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction Non insulated ceilings or where insulation can be kept 3" from the housing, furnished with preinstalled adjustable bar hangers.

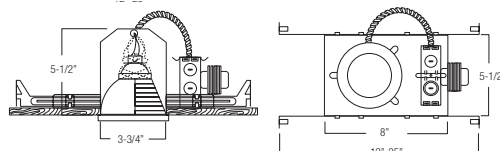


TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	120	AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/827/15		
	<input type="checkbox"/> LED7DMR16/827/25		
<input type="checkbox"/> LED7DMR16/827/35			
<input type="checkbox"/> LED7DMR16/NFL/TP			

3"


3 INCH DEDICATED MR16 LED HOUSING

B1326CL-WH 
The Illuminator II



Illuminator

AVAILABLE COLOR COMBINATIONS:
CL-WH, W-WH



HOUSING COMPATIBILITY GUIDE:
1 2 3

B1366CL-WH 
The Illuminator





Illuminator

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-SN



HOUSING COMPATIBILITY GUIDE:
1 2 3

B1303WH 
Slot Aperture





Apertura

TRIM:
WH, BK, CH, PB, CP,
SN, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1314P-WH 
Pinhole with Baffle



Forte

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ



HOUSING COMPATIBILITY GUIDE:
1 2 3

B1315RG-WH 
Pinhole with Reflector





Forte

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-SN, RG-WH,
MB-WH, W-WH, CP-CP



HOUSING COMPATIBILITY GUIDE:
1 2 3

B1362WH 
Shower Trim w/ Frosted Lens




Aqua

FOR WET LOCATION

TRIM:
WH, BK, CH, PB, CP,
SN, BZ

MAX 10W APPROVED
PATENT #: D510,151



HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1352WH 
Shower Trim w/ Reflector



Aqua

FOR WET LOCATION

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, CL-SN,
RG-WH, RG-PB,
MB-WH, SN-WH,
W-WH



HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1306WH 
Fully Adjustable (75° Tilt, 359° Rot.)



Galleria

TRIM:
WH, BK, CH, PB, CP,
SN, BZ



HOUSING COMPATIBILITY GUIDE:
1 2 4

B1312SN 
Fully Adjustable (35° Tilt)



Galleria

TRIM:
WH, BK, CH, PB, CP,
SN, BZ



HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1368W-WH 
Fully Adjustable w/ Baffle (35° Tilt)



Galleria

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ



HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1304W-WH 
Eyeball w/ Baffle (47° Tilt)



Galleria

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN



HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1377CL-WH 
Crossblade Reflector



Radiance

AVAILABLE COLOR COMBINATION:
CL-WH



HOUSING COMPATIBILITY GUIDE:
1 2 3

B1313P-SN 
Pull Down Adjustable



Galleria

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-SN,
CP-CP



HOUSING COMPATIBILITY GUIDE:
1 2

ALL TRIMS ABOVE ARE PATENT PENDING

BAFFLE FINISH:
W White
P Black
SN Satin Nickel
CP Copper
BZ Bronze

REFLECTOR FINISH:
CL Chrome
RG Gold
W White
MB Black

BZ Bronze
CP Copper
SN Satin Nickel
SHZ Satin Haze

RING/TRIM FINISH:
WH White
BK Black
SN Satin Nickel
CP Copper

CH Chrome
PB Polish Brass
BZ Bronze




B1396CP
Square Baffle w/ Square Trim Ring



Forte
AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ

PATENT PENDING
HOUSING COMPATIBILITY GUIDE:
1 2 3 4




B1378SN-SN
Stepped Baffle (35° Tilt)



Spectrum
AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1379CL-CH
Reflector (35° Tilt)



Radiance
AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, CL-SN,
RG-WH, SN-SN, SN-WH,
W-WH

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1383WH
Slot Aperture (35° Tilt)



Apertura
TRIM:
BZ, WH

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1380WH
Fully Adjustable (35° Tilt, 359° Rot.)



Galleria
TRIM:
WH, BK, BZ, CH, SN, CP

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1384P-WH
Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)



Galleria
AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1386WH
Fully Adjustable (75° Tilt, 359° Rot.)



Galleria
TRIM:
WH, BK, SN, BZ

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2




B1395CL-SN
Semi-Frosted Shower Trim



Aqua
FOR WET LOCATION
AVAILABLE COLOR COMBINATIONS:
CL-BK, CL-SN, CL-WH,
CL-BZ, CP-CP, SN-SN

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1390WH-PEACH
Metropolitan Ice Lite




GLASS:
BLUE, PEACH, FROSTED,
CLEAR, GREEN, AMBER

TRIM: WH

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1391P-WH
Pinhole with Baffle



Forte
AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1320WH-FROSTED
Metropolitan Moon Lite



GLASS:
BLUE, PEACH, FROSTED,
CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D508,750
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1325WH-AMBER
Metropolitan Step Lite



GLASS:
BLUE, PEACH, FROSTED,
CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D509,314
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1324WH-RED
Metropolitan Honey Lite



GLASS:
BLUE, PEACH,
FROSTED, CRYSTAL,
GREEN, AMBER, RED

TRIM: WH

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1301CP-CP
Stepped Baffle (35° Tilt)



Spectrum
AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1302CP-WH
Reflector (35° Tilt)



Radiance
AVAILABLE COLOR COMBINATIONS:
CP-CP, CP-WH, W-WH,
RG-WH, SN-SN, SN-WH,
MB-WH, CL-WH, MB-BK,
RG-PB, CL-CH, CL-SN,
BZ-BZ

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3




B1316CL-WH
Reflector (35° Tilt)



Radiance
AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-SN, W-WH

PATENT #: D510,151
HOUSING COMPATIBILITY GUIDE:
1 2 3



MR16 LENS FILTER

- BP8MR16-BL BLUE
- BP8MR16-GR GREEN
- BP8MR16-PI PINK
- BP8MR16-PU PURPLE
- BP8MR16-DL DAY LIGHT

- BP8MR16-YE YELLOW
- BP8MR16-AM AMBER
- BP8MR16-OR ORANGE
- BP8MR16-RE RED



CAT. #

- 1. BP8MR16-FR FROSTED
- 2. BP8MR16-SP SPREAD
- 3. BP8MR16-SF SOFT FOCUS
- 4. BP8MR16-HC HONEY COMB

TYPE

- 5. BP8MR16-LI LINEAR
- 6. BP8MR16-SOL SOLITE
- 7. BP8MR16-CL CLEAR
- 8. BP8MR16-UV ULTRAVIOLET

CAT. #

- 5. BP8MR16-LI LINEAR
- 6. BP8MR16-SOL SOLITE
- 7. BP8MR16-CL CLEAR
- 8. BP8MR16-UV ULTRAVIOLET

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.

