

## BL3IC-HRS1260M

3" MINIATURE DEDICATED MR16 LED IC HOUSING

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

### SPECIFICATION

**OUTER HOUSING** - Die-formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.

**INNER HOUSING** - Deep-drawn single piece aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

**DRIVER** - Class II dimming electronic driver.

**BAR HANGERS** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

**JUNCTION BOX** - listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

### OPTION

#### 1. AIR-SHUT-


- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

**25,000 hrs**  
RATED LIFE



### DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction IC rated Housing, furnished with preinstalled adjustable bar hangers.

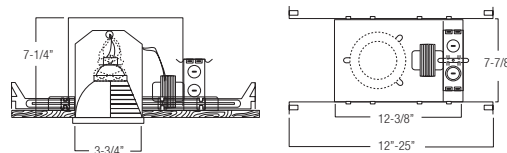

TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3IC-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	120	AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/827/15		
	<input type="checkbox"/> LED7DMR16/827/25		
	<input type="checkbox"/> LED7DMR16/827/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP		

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

### SPECIFICATION

**OUTER HOUSING** - Die-formed aluminum construction for maximum heat dissipating air chamber on top of the housing. Junction box could be accessed from inside and outside housing.

**INNER HOUSING** - Deep-drawn single piece aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling.

**DRIVER** - Class II dimming electronic drive.

**BAR HANGERS** - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

**JUNCTION BOX** - listed for through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.

### OPTION

#### 1. AIR-SHUT-


- Gasket to prevent air flow from heated or air conditioned spaces.
- Meets all national air flow requirements.

**25,000 hrs**  
RATED LIFE




## BL3IC-S-HRS1260M

3" MINIATURE DEDICATED MR16 LED SHALLOW IC HOUSING

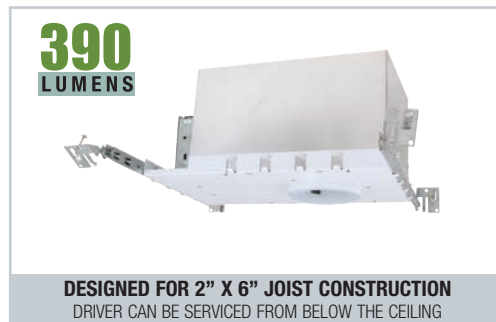

### DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction IC rated Shallow Housing, furnished with preinstalled adjustable bar hangers.

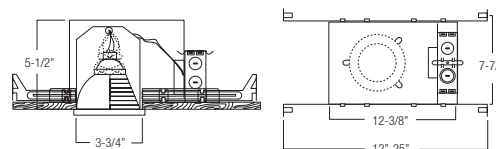

TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3IC-S-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	120	AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/827/15		
	<input type="checkbox"/> LED7DMR16/827/25		
	<input type="checkbox"/> LED7DMR16/827/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP		


# 3" LOW VOLTAGE TRIMS

**B1326CL-WH**  
The Illuminator II



*Illuminator*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, W-WH




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1366CL-WH**  
The Illuminator



*Illuminator*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-SN




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1303WH**  
Slot Aperture



*Apertura*

TRIM:  
WH, BK, CH, PB, CP, SN, BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1314P-WH**  
Pinhole with Baffle



*Forte*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1315RG-WH**  
Pinhole with Reflector



*Forte*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-SN, RG-WH, MB-WH, W-WH, CP-CP




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1362WH**  
Shower Trim w/ Frosted Lens



*Aqua*

TRIM:  
WH, BK, CH, PB, CP, SN, BZ



PATENT #: D510,151


HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1352WH**  
Shower Trim w/ Reflector



*Aqua*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-CH, CL-SN, RG-WH, RG-PB, MB-WH, SN-WH, W-WH




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1306WH**  
Fully Adjustable (75° Tilt, 359° Rot.)



*Galleria*

TRIM:  
WH, BK, CH, PB, CP, SN, BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 4**

**B1312SN**  
Fully Adjustable (35° Tilt)



*Galleria*

TRIM:  
WH, BK, CH, PB, CP, SN, BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1368W-WH**  
Fully Adjustable w/ Baffle (35° Tilt)



*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1304W-WH**  
Eyeball w/ Baffle (47° Tilt)



*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK, CP-CP, SN-SN




HOUSING COMPATIBILITY GUIDE:  
**1 2 3 4**

**B1377CL-WH**  
Crossblade Reflector



*Radiance*

AVAILABLE COLOR COMBINATION:  
CL-WH




HOUSING COMPATIBILITY GUIDE:  
**1 2 3**

**B1313P-SN**  
Pull Down Adjustable



*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-SN, CP-CP



HOUSING COMPATIBILITY GUIDE:  
**1 2**

ALL TRIMS ABOVE ARE PATENT PENDING

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL3IC, BL3, BL3R	50W 12V MR16
2	BL3-75	75W 12V MR16
3	G3IC, G3, G3R	50W 120V GU10
4	BL30IC-E, BL3E-S, BL3RE-S	35W 12V MR16

**BAFFLE FINISH:**  
W White  
P Black  
SN Satin Nickel  
CP Copper  
BZ Bronze

**REFLECTOR FINISH:**  
CL Chrome  
RG Gold  
W White  
MB Black

**RING/TRIM FINISH:**  
WH White  
BK Black  
SN Satin Nickel  
CP Copper

**CH Chrome**  
**PB Polish Brass**  
**BZ Bronze**

General Lighting  
 Wall Wash Lighting

Accent Lighting  
 Sloped Ceiling Lighting

Task Lighting

3 INCH LOW VOLTAGE TRIMS

**B1396CP**  
Square Baffle w/ Square Trim Ring




*Forte*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT PENDING

HOUSING COMPATIBILITY GUIDE:  
1 2 3 4



**B1378SN-SN**  
Stepped Baffle (35° Tilt)




*Spectrum*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1379CL-CH**  
Reflector (35° Tilt)




*Radiance*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-CH, CL-SN,  
RG-WH, SN-SN, SN-WH,  
W-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1383WH**  
Slot Aperture (35° Tilt)




*Apertura*

TRIM:  
BZ, WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1380WH**  
Fully Adjustable (35° Tilt, 359° Rot.)




*Galleria*

TRIM:  
WH, BK, BZ, CH, SN, CP

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1384P-WH**  
Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)




*Galleria*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1386WH**  
Fully Adjustable (75° Tilt, 359° Rot.)




*Galleria*

TRIM:  
WH, BK, SN, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2



**B1395CL-SN**  
Semi-Frosted Shower Trim




FOR WET LOCATION

*Aqua*

AVAILABLE COLOR COMBINATIONS:  
CL-BK, CL-SN, CL-WH,  
CL-BZ, CP-CP, SN-SN

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1390WH-PEACH**  
Metropolitan Ice Lite




GLASS:  
BLUE, PEACH, FROSTED,  
CLEAR, GREEN, AMBER

TRIM: WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1391P-WH**  
Pinhole with Baffle




*Forte*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1320WH-FROSTED**  
Metropolitan Moon Lite




GLASS:  
BLUE, PEACH, FROSTED,  
CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D508,750

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1325WH-AMBER**  
Metropolitan Step Lite




GLASS:  
BLUE, PEACH, FROSTED,  
CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D509,314

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1324WH-RED**  
Metropolitan Honey Lite




GLASS:  
BLUE, PEACH,  
FROSTED, CRYSTAL,  
GREEN, AMBER, RED

TRIM: WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1301CP-CP**  
Stepped Baffle (35° Tilt)




*Spectrum*

AVAILABLE COLOR COMBINATIONS:  
W-WH, P-WH, P-BK,  
CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1302CP-WH**  
Reflector (35° Tilt)




*Radiance*


AVAILABLE COLOR COMBINATIONS:  
CP-CP, CP-WH, W-WH,  
RG-WH, SN-SN, SN-WH,  
MB-WH, CL-WH, MB-BK,  
RG-PB, CL-CH, CL-SN,  
BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**B1316CL-WH**  
Reflector (35° Tilt)




*Radiance*

AVAILABLE COLOR COMBINATIONS:  
CL-WH, CL-SN, W-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:  
1 2 3



**MR16 LENS FILTER**  
BP8MR16-BL BLUE  
BP8MR16-GR GREEN  
BP8MR16-PI PINK  
BP8MR16-PU PURPLE  
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW  
BP8MR16-AM AMBER  
BP8MR16-OR ORANGE  
BP8MR16-RE RED



**CAT. #**  
1. BP8MR16-FR FROSTED SPREAD  
2. BP8MR16-SP SOFT FOCUS HONEY COMB  
3. BP8MR16-SF  
4. BP8MR16-HC

**CAT. #**  
5. BP8MR16-LI LINEAR SOLITE  
6. BP8MR16-SOL SOLITE  
7. BP8MR16-CL CLEAR  
8. BP8MR16-UV ULTRAVIOLET

ALL PRODUCTS ARE U.S. AND FOREIGN PATENT PENDING

WWW.IUSEELITE.COM • TEL: 1-877-375-5555 • FAX: 1-877-375-3333



3"

3 INCH LOW VOLTAGE TRIMS



# 3-inch Recessed Diamond Collection

NEW

The new crystal collection from Elite Lighting is more than just a trim, it's a form of art. Brilliant crystal jewels are aligned perfectly to provide a unique and sophisticated appearance to any space. Enhance the appearance of hallways, lobbies or waiting areas into an elegant appealing space. Different size crystals, along with a variety of colors make the Crystal Collection a beautiful masterpiece.

**B1351CH**  
Ruby I



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1353CH**  
Ruby II



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1354CH**  
Sapphire I



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1355CH**  
Sapphire II



**DESCRIPTION:**

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1356CH**  
Emerald I



**DESCRIPTION:**

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1357CH**  
Emerald II



**DESCRIPTION:**

- All die-cast construction with enhanced amber crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1358CH**  
Topaz I



**DESCRIPTION:**

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1359CH**  
Topaz II



**DESCRIPTION:**

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



**B1360CH**  
Onyx



**DESCRIPTION:**

- All die-cast construction with frosted glass
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



FINISH TRIM	TRIM OUTSIDE DIA.	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
CH - Chrome	3-7/8"	1	BL3IC, BL3, BL3R	50W 12V MR16
		2	BL3-75	75W 12V MR16
		3	G3IC, G3, G3R	50W 120V GU10
		4	BL3ICE-S, BL30IC, BL3E-S, BL3RE-S	35W 12V MR16



3"