


BL3-S-HRS1260M

3" MINIATURE DEDICATED MR16 LED "NOISE-FREE" SHALLOW NON-IC HOUSING

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390

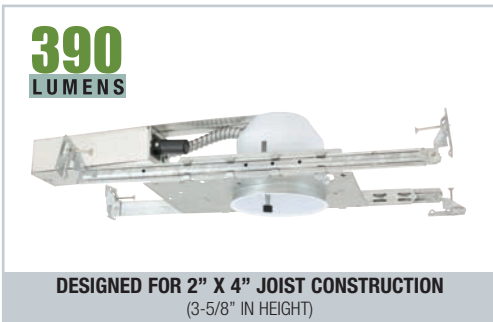

DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, New Construction Non insulated ceilings or where insulation can be kept 3" from the housing, furnished with preinstalled adjustable bar hangers.

SPECIFICATION

HOUSING - High temperature painted 22 gauge deep drawn single piece housing. Adjusts vertically in plaster frame to accommodate 1/2" to 1-3/8" ceiling. Accommodates lamps up to 35W depending on trim used.

DRIVER - Class II dimming electronic driver.

BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24" joist span and can be shortened for 12" joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20° downward angle for better contact, and the 90° pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

JUNCTION BOX - through-branch circuit wiring and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps.


OPTION

1. AIR-SHUT-

- Gasket to prevent air flow from heated or air conditioned spaces.

- Meets all national air flow requirements.

25,000 hrs
RATED LIFE

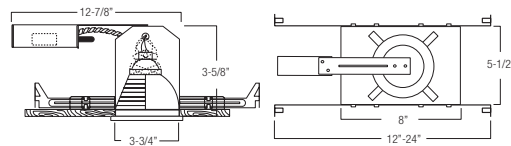

TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3-S-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	<input type="checkbox"/> 120	<input type="checkbox"/> AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/827/15		
	<input type="checkbox"/> LED7DMR16/827/25		
	<input type="checkbox"/> LED7DMR16/827/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP		

BL3R-S-HRS1260M

3" MINIATURE DEDICATED MR16 LED "NOISE-FREE" SHALLOW NON-IC REMODEL HOUSING



DESCRIPTION

Developed especially for LED MR16 lamp applications. Crafted for sustainability and environmentally sensitive applications. Five times the life expectancy of halogen MR16 with 80% energy savings. Small aperture LED MR16 dedicated, thermally protected, For Remodel Construction with three remodel clips are easily retractable for fixture removal if necessary. Non insulated ceilings or where insulation can be kept 3" from the housing.

SPECIFICATION

HOUSING - High temperature painted 22 gauge deep drawn single piece housing.

DRIVER - Class II dimming electronic driver.

JUNCTION BOX - through-branch circuit wiring and has eight 1/2" KOs and four Romex knockouts with strain relief.

INSTALLATION - Three preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thickness from 1/2" to 1-3/8".

INPUT VOLT.	INPUT FREQ.	WATT	CRI	COLOR TEMP.	LUMENS
120	50/60Hz	7W	80.0	2700°K/3000°K	390


OPTION

1. AIR-SHUT-

- Gasket to prevent air flow from heated or air conditioned spaces.

- Meets all national air flow requirements.

25,000 hrs
RATED LIFE

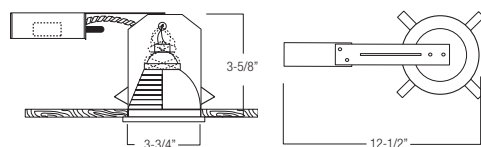

TYPE	GE MR16 LED LAMP INCLUDED	VOLTAGE	OPTION
BL3R-S-HRS1260M	<input type="checkbox"/> LED7DMR16/830/15	<input type="checkbox"/> 120	<input type="checkbox"/> AT Air-Shut
	<input type="checkbox"/> LED7DMR16/830/25		
	<input type="checkbox"/> LED7DMR16/830/35		
	<input type="checkbox"/> LED7DMR16/827/15		
	<input type="checkbox"/> LED7DMR16/827/25		
	<input type="checkbox"/> LED7DMR16/827/35		
	<input type="checkbox"/> LED7DMR16/NFL/TP		

3"

3 INCH DEDICATED MR16 LED NON-IC SHALLOW HOUSING


3" LOW VOLTAGE TRIMS

B1326CL-WH
The Illuminator II



Illuminator

AVAILABLE COLOR COMBINATIONS:
CL-WH, W-WH




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1366CL-WH
The Illuminator



Illuminator

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-SN




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1303WH
Slot Aperture



Apertura

TRIM:
WH, BK, CH, PB, CP,
SN, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1314P-WH
Pinhole with Baffle



Forte

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1315RG-WH
Pinhole with Reflector



Forte

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-SN, RG-WH,
MB-WH, W-WH, CP-CP




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1362WH
Shower Trim w/ Frosted Lens



Aqua

TRIM:
WH, BK, CH, PB, CP,
SN, BZ



PATENT #: D510,151


HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1352WH
Shower Trim w/ Reflector



Aqua

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, CL-SN,
RG-WH, RG-PB,
MB-WH, SN-WH,
W-WH




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1306WH
Fully Adjustable (75° Tilt, 359° Rot.)



Galleria

TRIM:
WH, BK, CH, PB, CP,
SN, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 4

B1312SN
Fully Adjustable (35° Tilt)



Galleria

TRIM:
WH, BK, CH, PB, CP,
SN, BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1368W-WH
Fully Adjustable w/ Baffle (35° Tilt)



Galleria

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN, BZ-BZ




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1304W-WH
Eyeball w/ Baffle (47° Tilt)



Galleria

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK,
CP-CP, SN-SN




HOUSING COMPATIBILITY GUIDE:
1 2 3 4

B1377CL-WH
Crossblade Reflector



Radiance

AVAILABLE COLOR COMBINATION:
CL-WH




HOUSING COMPATIBILITY GUIDE:
1 2 3

B1313P-SN
Pull Down Adjustable



Galleria

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-SN,
CP-CP



HOUSING COMPATIBILITY GUIDE:
1 2

ALL TRIMS ABOVE ARE PATENT PENDING

GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
1	BL3IC, BL3, BL3R	50W 12V MR16
2	BL3-75	75W 12V MR16
3	G3IC, G3, G3R	50W 120V GU10
4	BL30IC-E, BL3E-S, BL3RE-S	35W 12V MR16

BAFFLE FINISH:

- W** White
- P** Black
- SN** Satin Nickel
- CP** Copper
- BZ** Bronze

REFLECTOR FINISH:

- CL** Chrome
- RG** Gold
- W** White
- MB** Black

RING/TRIM FINISH:

- BZ** Bronze
- CP** Copper
- SHZ** Satin Haze
- WH** White
- BK** Black
- SN** Satin Nickel
- CP** Copper
- CH** Chrome
- PB** Polish Brass
- BZ** Bronze



General Lighting



Accent Lighting



Task Lighting



Wall Wash Lighting



Sloped Ceiling Lighting

3 INCH LOW VOLTAGE TRIMS

B1396CP Square Baffle w/ Square Trim Ring




Forte

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ

PATENT PENDING

HOUSING COMPATIBILITY GUIDE:
1 2 3 4



B1378SN-SN Stepped Baffle (35° Tilt)




Spectrum

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1379CL-CH Reflector (35° Tilt)




Radiance

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-CH, CL-SN, RG-WH, SN-SN, SN-WH, W-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1383WH Slot Aperture (35° Tilt)




Apertura


TRIM:
BZ, WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1380WH Fully Adjustable (35° Tilt, 359° Rot.)




Galleria

TRIM:
WH, BK, BZ, CH, SN, CP

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1384P-WH Fully Adj. w/ Baffle (35° Tilt, 359° Rot.)




Galleria


AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1386WH Fully Adjustable (75° Tilt, 359° Rot.)




Galleria

TRIM:
WH, BK, SN, BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2



B1395CL-SN Semi-Frosted Shower Trim




FOR WET LOCATION

Aqua

AVAILABLE COLOR COMBINATIONS:
CL-BK, CL-SN, CL-WH, CL-BZ, CP-CP, SN-SN

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1390WH-PEACH Metropolitan Ice Lite




GLASS:
BLUE, PEACH, FROSTED, CLEAR, GREEN, AMBER

TRIM: WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1391P-WH Pinhole with Baffle




Forte

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1320WH-FROSTED Metropolitan Moon Lite




GLASS:
BLUE, PEACH, FROSTED, CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D508,750

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1325WH-AMBER Metropolitan Step Lite




GLASS:
BLUE, PEACH, FROSTED, CRYSTAL, GREEN, AMBER

TRIM: WH

PATENT #: D509,314

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1324WH-RED Metropolitan Honey Lite




GLASS:
BLUE, PEACH, FROSTED, CRYSTAL, GREEN, AMBER, RED

TRIM: WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1301CP-CP Stepped Baffle (35° Tilt)




Spectrum

AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, CP-CP, SN-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1302CP-WH Reflector (35° Tilt)




Radiance

AVAILABLE COLOR COMBINATIONS:
CP-CP, CP-WH, W-WH, RG-WH, SN-SN, SN-WH, MB-WH, CL-WH, MB-BK, RG-PB, CL-CH, CL-SN, BZ-BZ

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



B1316CL-WH Reflector (35° Tilt)




Radiance

AVAILABLE COLOR COMBINATIONS:
CL-WH, CL-SN, W-WH

PATENT #: D510,151

HOUSING COMPATIBILITY GUIDE:
1 2 3



MR16 LENS FILTER
BP8MR16-BL BLUE
BP8MR16-GR GREEN
BP8MR16-PI PINK
BP8MR16-PU PURPLE
BP8MR16-DL DAY LIGHT

BP8MR16-YE YELLOW
BP8MR16-AM AMBER
BP8MR16-OR ORANGE
BP8MR16-RE RED



CAT. #
1. BP8MR16-FR FROSTED SPREAD
2. BP8MR16-SP SOFT FOCUS HONEY COMB
3. BP8MR16-SF
4. BP8MR16-HC

CAT. #
5. BP8MR16-LI LINEAR SOLITE
6. BP8MR16-SOL SOLITE
7. BP8MR16-CL CLEAR
8. BP8MR16-UV ULTRAVIOLET

ALL PRODUCTS ARE U.S. AND FOREIGN PATENT PENDING

WWW.IUSEELITE.COM • TEL: 1-877-375-5555 • FAX: 1-877-375-3333



3"

3 INCH LOW VOLTAGE TRIMS

3-inch Recessed Diamond Collection

NEW

The new crystal collection from Elite Lighting is more than just a trim, it's a form of art. Brilliant crystal jewels are aligned perfectly to provide a unique and sophisticated appearance to any space. Enhance the appearance of hallways, lobbies or waiting areas into an elegant appealing space. Different size crystals, along with a variety of colors make the Crystal Collection a beautiful masterpiece.

B1351CH
Ruby I



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1353CH
Ruby II



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1354CH
Sapphire I



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1355CH
Sapphire II



DESCRIPTION:

- All die-cast construction with enhanced clear crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1356CH
Emerald I



DESCRIPTION:

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1357CH
Emerald II



DESCRIPTION:

- All die-cast construction with enhanced amber crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1358CH
Topaz I



DESCRIPTION:

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1359CH
Topaz II



DESCRIPTION:

- All die-cast construction with enhanced color crystals
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



B1360CH
Onyx



DESCRIPTION:

- All die-cast construction with frosted glass
- Internal gasket prevents light leakage
- Chrome trim finish standard on all trims

HOUSING COMPATIBILITY GUIDE:

1 2 3 4



FINISH TRIM	TRIM OUTSIDE DIA.	GUIDE	HOUSING COMPATIBILITY	MAX. LAMP WATTAGE
CH - Chrome	3-7/8"	1	BL3IC, BL3, BL3R	50W 12V MR16
		2	BL3-75	75W 12V MR16
		3	G3IC, G3, G3R	50W 120V GU10
		4	BL3ICE-S, BL30IC, BL3E-S, BL3RE-S	35W 12V MR16

